

Common Mode Chokes

DC Resistance

Max.

mΩ

27

38

97

197

DC Current

Max.

А

4.1

3.3

1.9

1.2

Leakage

Inductance

Max.

μH

9

18

45

75

-40°C to 125°C

-40°C to 125°C

1500Vrms

260°C

Tin





FEATURES

- RoHS compliant
- Toroidal construction
- Up to 4.1A loc
- Inductance range from 0.5 to 5.0mH
- Small footprint
- UL 94V-0 packaging materials
- Low DC resistance
- Guaranteed 3.0mm creepage and clearance between windings


PRODUCT OVERVIEW


The 5100 series is a range of through-hole common mode chokes designed to attenuate up to 100MHz common mode noise where line filtering is required, such as high current switching power supplies and telecom applications.






Specifications typical at $T_A = 25^{\circ}C$ 1 For further information, please visit www.murata-ps.com/rohs

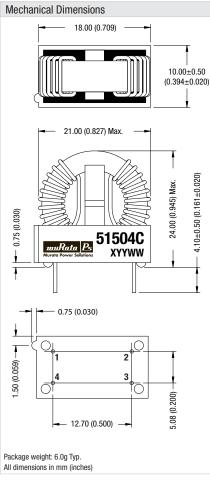





SELECTION GUIDE

Order Code

51504C

51105C

51305C

51505C

Isolation voltage

Pin finish

ABSOLUTE MAXIMUM RATINGS

Storage temperature range

SOLDERING INFORMATION¹ Peak wave solder temperature

PACKAGE SPECIFICATIONS

Operating free air temperature range

Inductance

Range

mΗ

0.37-0.68

0.75-1.39

2.16-4.02

3.62-6.73

Nom.

mΗ

0.5

1.0

3.0

5.0


www.murata-ps.com/support



5100 Series

Common Mode Chokes

COMMON AND DIFFERENTIAL MODE ATTENUATION VS FREQUENCY

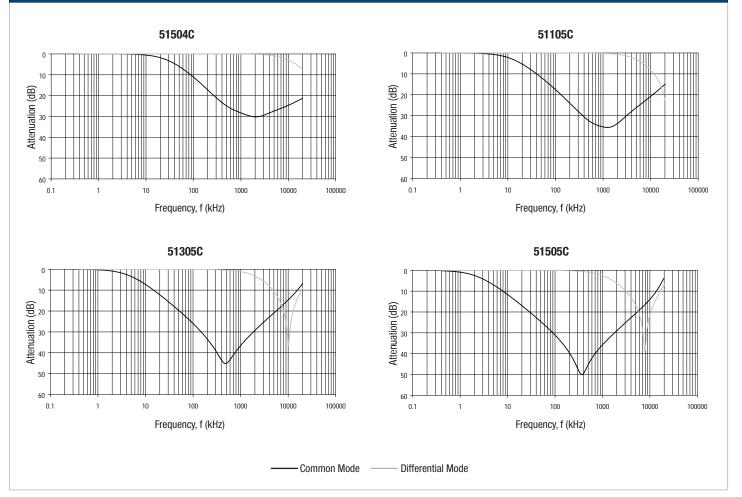

Murata Power Solutions, Inc. 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A. ISO 9001 and 14001 REGISTERED

www.murata-ps.com/support

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.