

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

-,-



COPYRIGHT - By -



ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	NEW RELEASE	12MAR03	ECC	FDM
	A1	ECR-13-010529	25JUN13	GSK	BvH

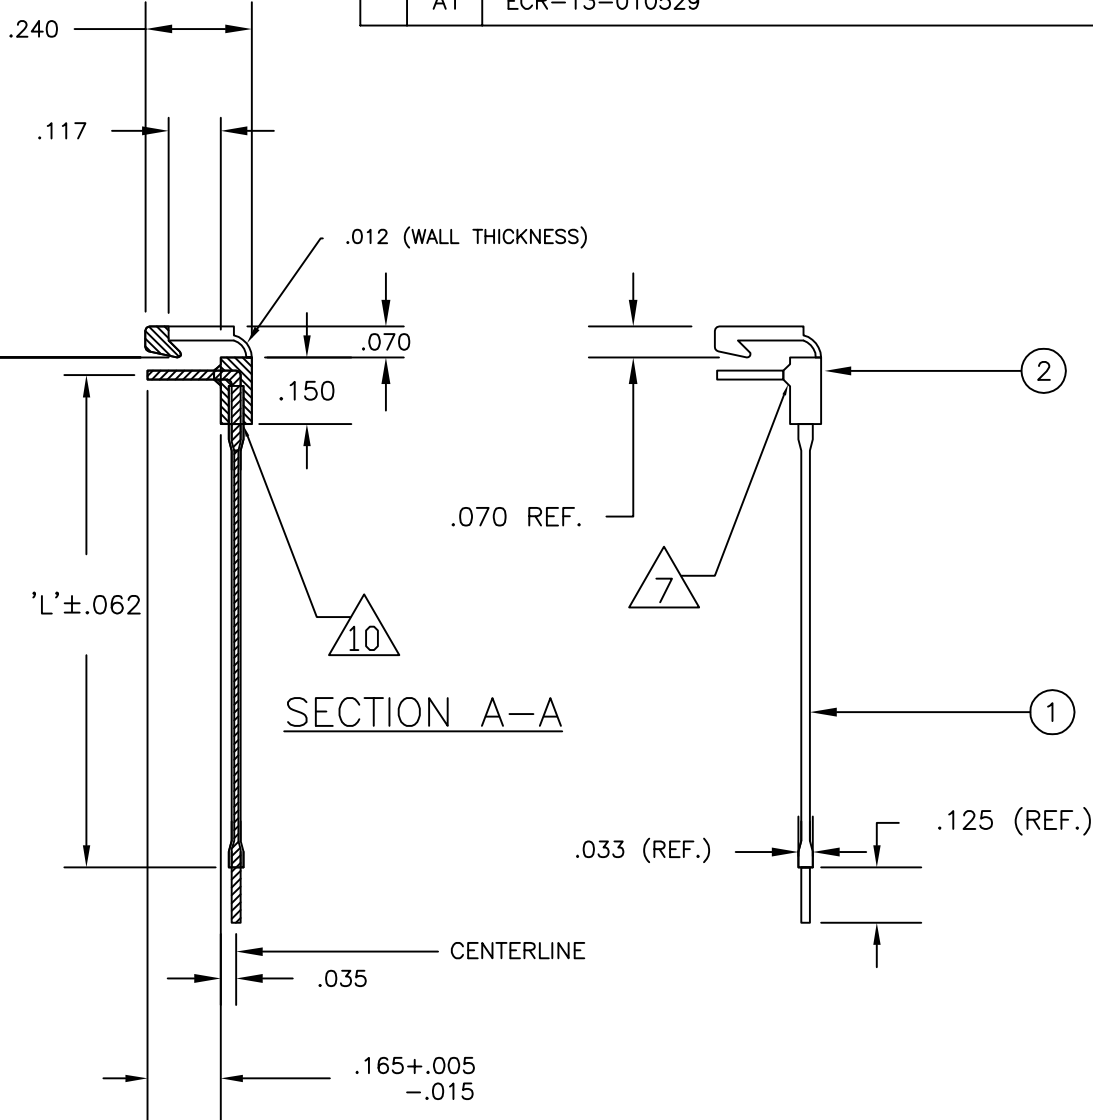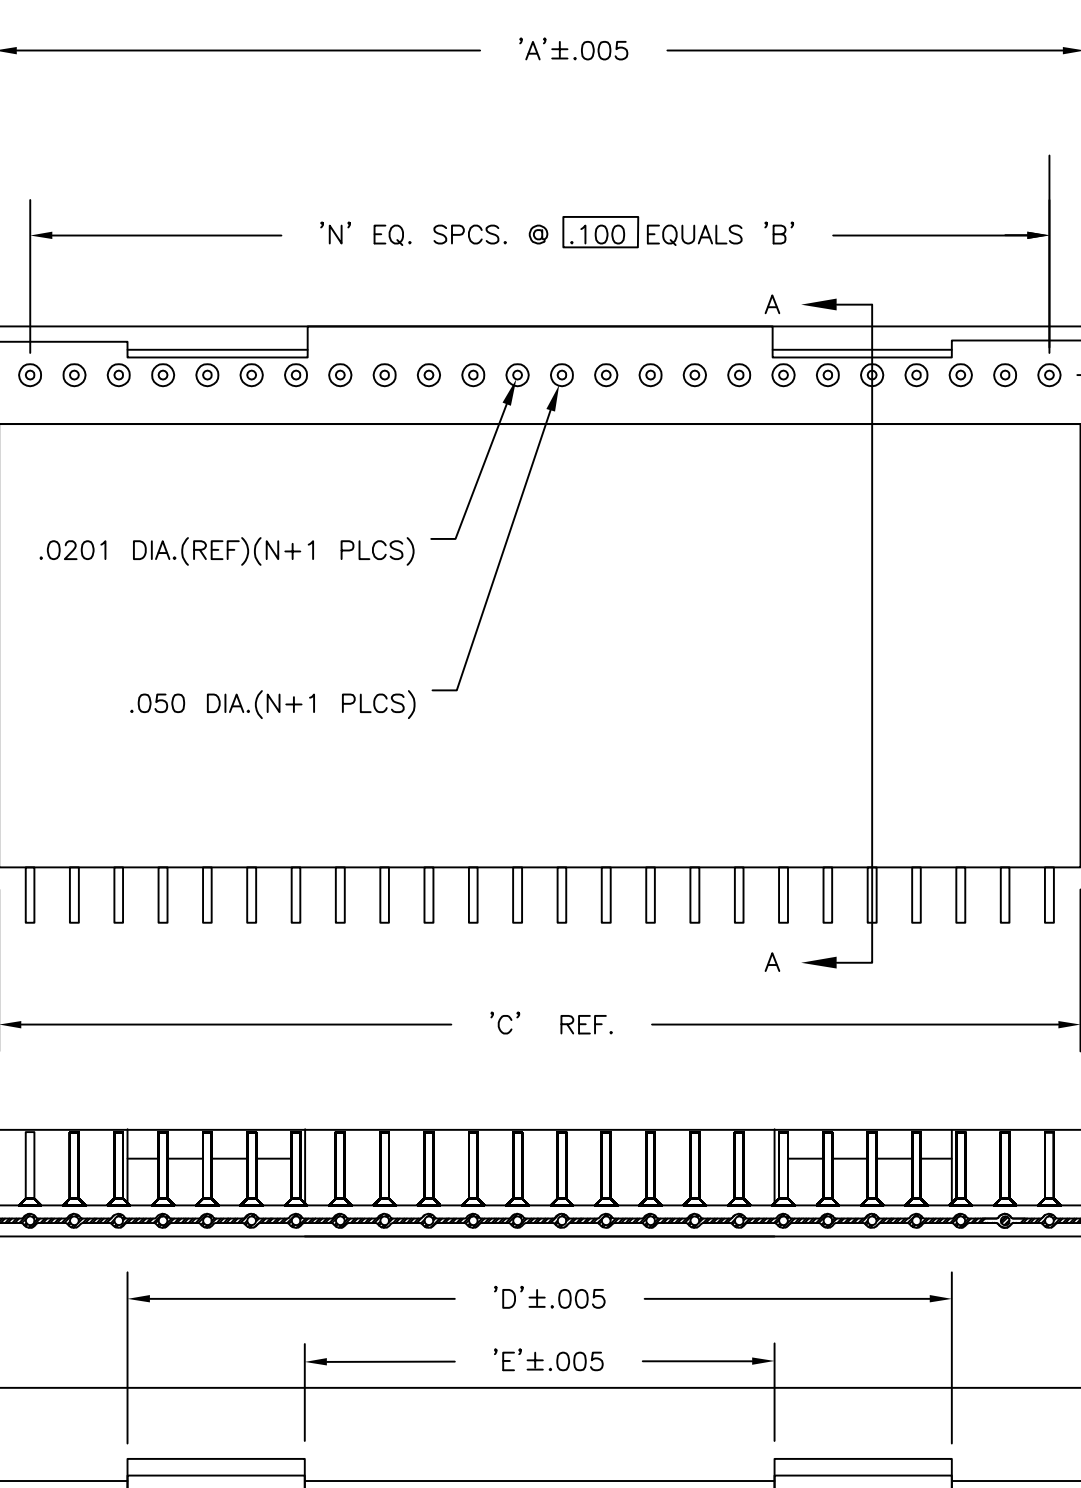

A/R	1474098-1	NYLON OVERMOLD	2
A/R	1474119-X	FLEXSTRIP JUMPER	1
QTY	PART NUMBER	DESCRIPTION	ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES



MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± .002
4 PLC	± -
ANGLES	± -

FINISH

DWN 12/MAR/03

CHK E.C. CLAYBAUGH

F.D. McCORKEL 12/MAR/03

APVD 03/APR/03

F.D. McCORKEL

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

HEADER, FLEXSTRIP
OVERMOLD SERIES

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3 00779 C=1474532

SCALE N.T.S.

SHEET 1 OF 4

REV A1

4

3

2


1

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION
© COPYRIGHT - By -	ALL RIGHTS RESERVED.



LOC	DIST	REVISIONS				
GP	00	P	LTR	DESCRIPTION	DATE	APVD
		-	-	SEE SHEET 1	-	-

DIMENSIONS						
N	A	B	C	D	E	F
8	.860	.700	.850	-	-	.400
9	.960	.800	.950	-	-	.500
10	1.060	.900	1.050	-	-	.500
-	-	-	-	-	-	-
14	1.460	1.300	1.450	1.060	.260	-
16	1.660	1.500	1.650	1.060	.260	-
18	1.860	1.700	1.850	1.460	.860	-
20	2.060	1.900	2.050	1.460	.860	-
22	2.260	2.100	2.250	1.660	1.060	-
24	2.460	2.300	2.450	1.860	1.060	-

LATCH CONFIGURATION FOR 14,16,18,20 & 22

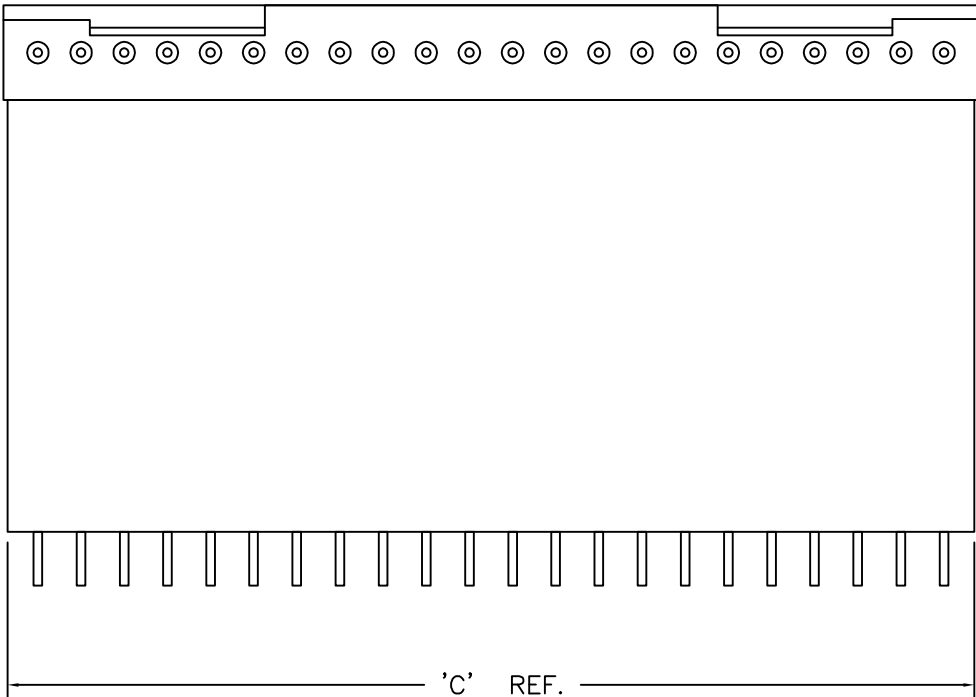

LATCH CONFIGURATION FOR 8,9,10

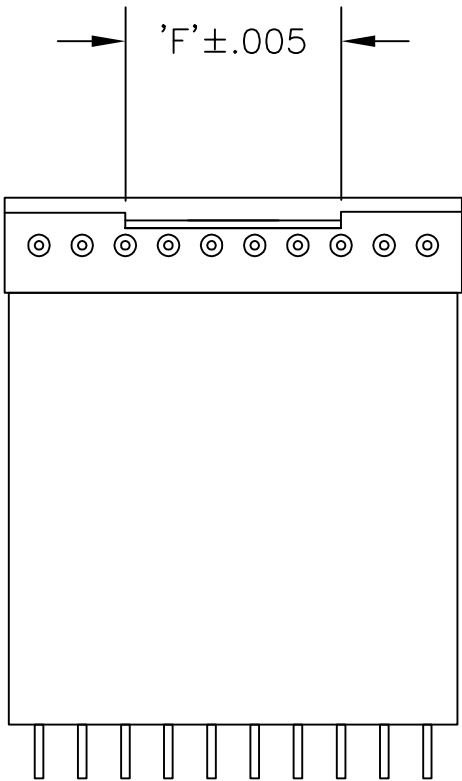



SERIES NUMBER FH - X XXXX X X

INSULATION MATERIAL
N = NOMEX
P = POLYESTER
T = TEFLON
K = KAPTON

NUMBER OF CONDUCTORS
(8,9,10,14,16,18,20,22,24)

RIGHT END CONFIGURATION
SEE SHEET 3.

LENGTH OF HEADER ("L")
(.75 TO 31.0 INCHES)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 12/MAR/03 E.C. CLAYBAUGH	 TE Connectivity		
		CHK 12/MAR/03 F.D. McCORKEL			
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD 04/APR/03 F.D. McCORKEL	NAME		
	0 PLC ± -	PRODUCT SPEC	HEADER, FLEXSTRIP OVERMOLD SERIES		
	1 PLC ± -	APPLICATION SPEC	-		
MATERIAL	2 PLC ± -	WEIGHT	-		
	3 PLC ± .002	CUSTOMER DRAWING	-		
	4 PLC ± -	SCALE	N.T.S.		
	ANGLES ± -	SHEET	2 of 4		
	FINISH	REV	A1		

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT — By —

LOC

DIST

REVISIONS

GP

00

P

LTR
















DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1

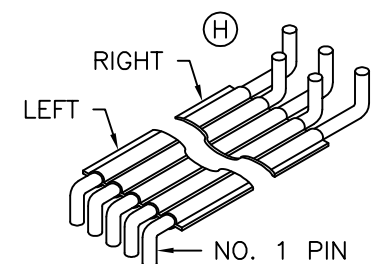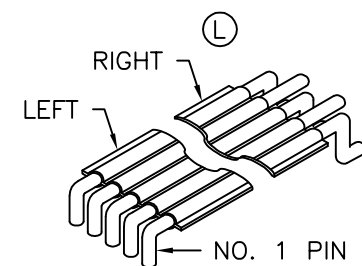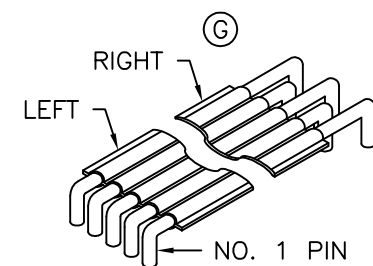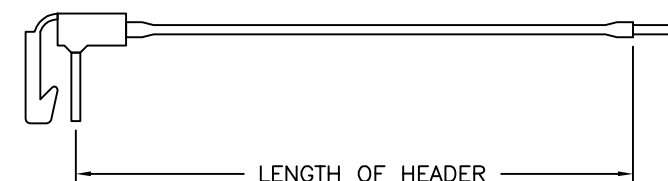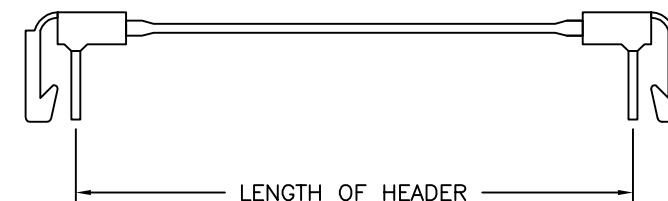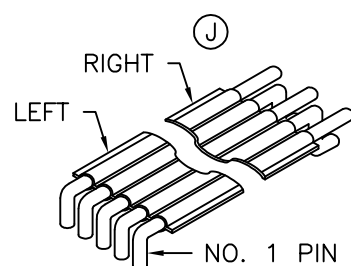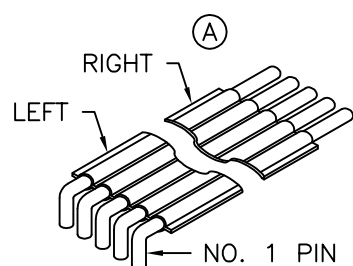

NOTES: UNLESS OTHERWISE SPECIFIED.

1. ALL LEFT END PIN LENGTHS ARE .190
ALL RIGHT END PIN LENGTHS PER 1474339.

2. PIN LENGTHS ARE .175 BOTH ENDS FOR CONFIGURATION M AND N.

3. IF FLEXSTRIP HEADER, FH IS MOLDED ON ONE END,
FLEXSTRIP MATERIAL IS .04 SHORTER.
IF BOTH ENDS MOLDED, FLEXSTRIP MATERIAL IS .08 SHORTER.

4. T&B REF. — ALSO APPLIES TO D5697-XX, D5548-XX, AND 55D006.

5. .100 CENTERLINE, ONLY.

6. MIN. BEND RADIUS OF .020 INCHES.

7. NO FLASH PERMITTED.


8. ALL RADII .005 MAX.

9.

10. FLASH TO BE .100 MAX. ALLOWED THIS SURFACE.

SHOWN WITHOUT LEFT END
OVERMOLD FOR CLARITY.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ± —
1 PLC ± —
2 PLC ± —
3 PLC ± .002
4 PLC ± —
ANGLES ± —

FINISH

DWN 12/MAR/03

CHK E.C. CLAYBAUGH

F.D. McCORKEL 12/MAR/03

APVD 04/APR/03

F.D. McCORKEL

PRODUCT SPEC

—

APPLICATION SPEC

—

WEIGHT

—

—

—

—

—

—

—

—



TE Connectivity

NAME

FLEXSTRIP JUMPER, SPECIAL
OVERMOLD SERIES

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3 00779

C=1474532

SCALE N.T.S.

SHEET 3 of 4

REV A1

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

ALL RIGHTS RESERVED.

© COPYRIGHT - By -

LOC

DIST

REVISIONS

GP

00

P

LTR

DESCRIPTION

DATE

DWN

APVD
















-

SEE SHEET 1

-

-


-

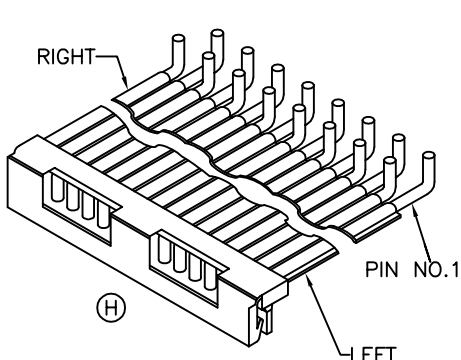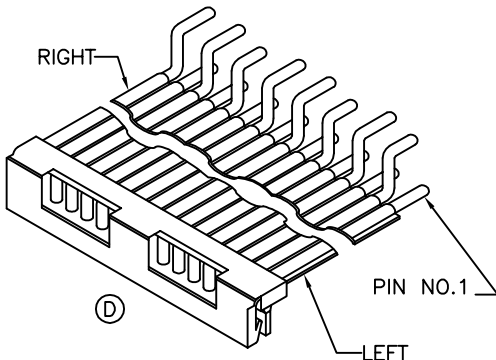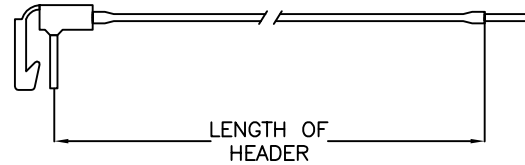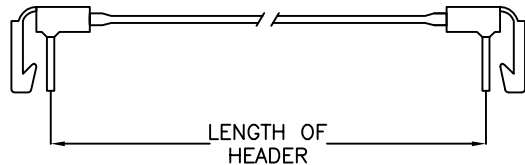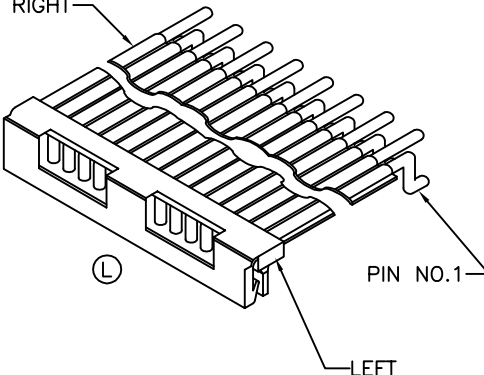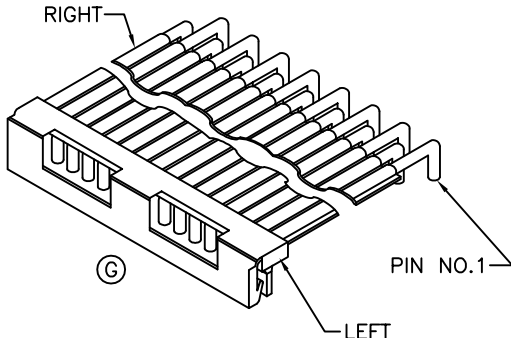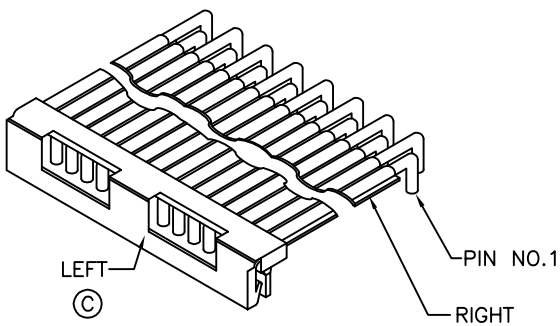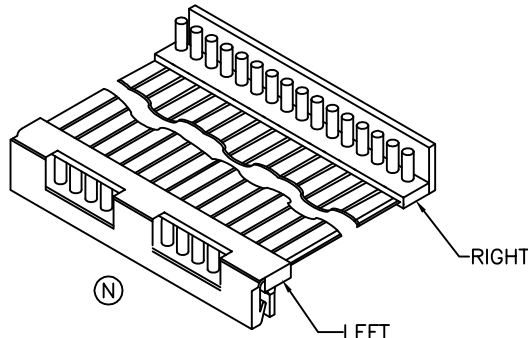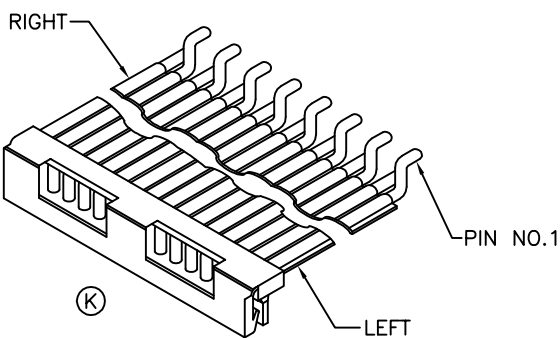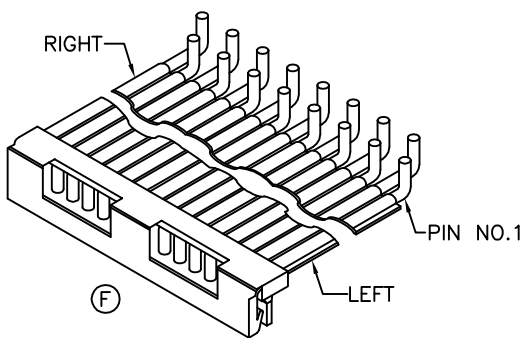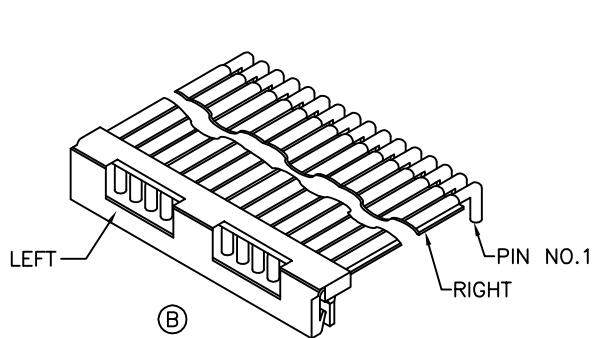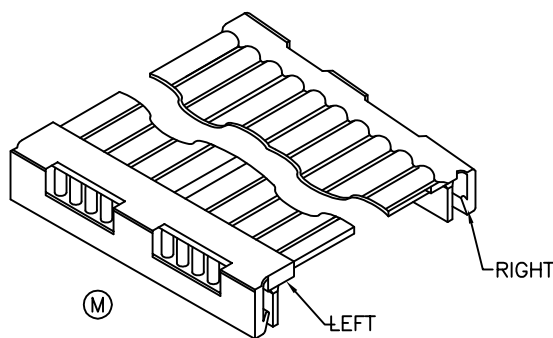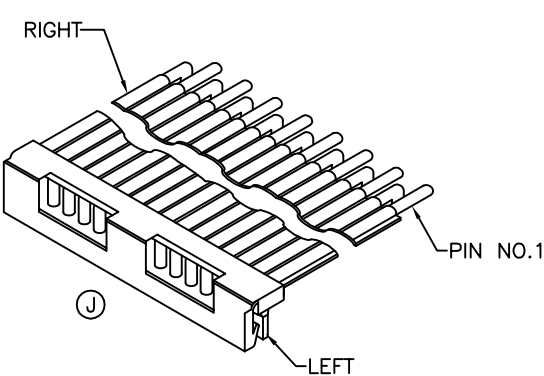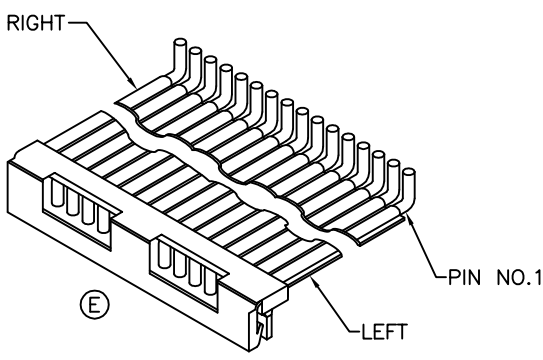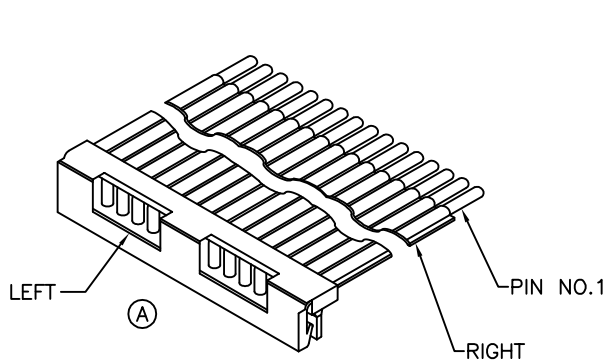

LATCH CONFIGURATION

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES



MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

FINISH

DWN 12/MAR/03

E.C. CLAYBAUGH

CHK 12/MAR/03

F.D. MCcORKEL

APVD 12/MAR/03

F.D. McCORKEL

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

HEADER,FLEXSTRIP
OVERMOLD SERIES

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1474532

SCALE

N.T.S.

SHEET

4 of 4

REV

A1