
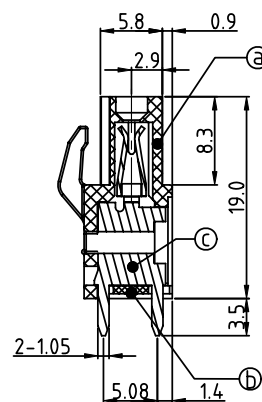
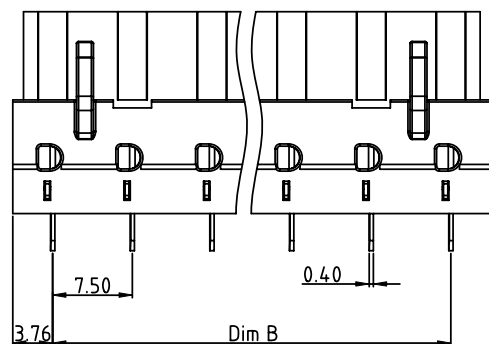
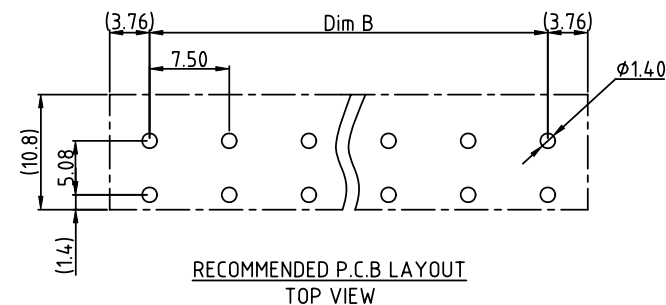



PRODUCT NUMBER

PITCH

V7xxA1x000J0G

7.50 mm

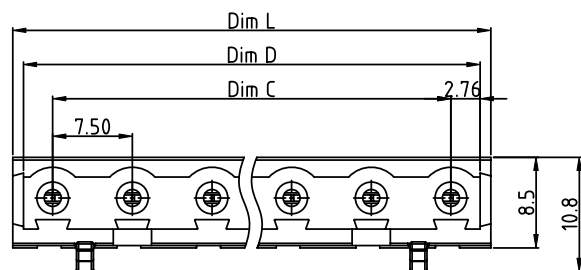

Material:

- Item①Terminal body:Thermoplastic (UL94V-0)
- Item②Terminal Cover:Thermoplastic (UL94V-0)
- Item③Female contact:PhBz(CuSn),Tin plated

Electrical cULus

- Voltage rating: 300VAC
- Current rating: 10A
- Withstanding Voltage: 1.6kv
- Operating temperature: -40°C to +115°C
- Soldering temperature: 260°C±5°C/5 Sec
- Safety Approval: cULus

PART NO.: V7 xx A 1 x 0 00J0 G

N=Number of poles
 Dim L=(N-1)×7.50+7.52
 Dim B=(N-1)×7.50
 Dim C=(N-1)×7.50
 Dim D=(N-1)×7.50+5.52

poles	Tolerance
2-5p	±0.15
6-10p	±0.25
11-16p	±0.35

Solid block
 No. of poles
 02 2poles
 03 3poles
 ...
 16 16poles

Color
 0 Black (RAL9005)
 2 Red (RAL3001/D)
 3 Orange(RAL2011/P)
 4 Yellow(RAL1018/A)
 5 Green(RAL6018/T)
 6 Blue (RAL5015/A)
 8 Grey(RAL7035/D)
 9 White(RAL1102)
 C Green(RAL6018/U)

RoHS compliant
 (lead<4%)
 In copper Alloy

mat'l. code				surface ASME Y14.5✓	tolerance ASME Y14.5	projection	product family			
ltr	ecn	no	dr	date	tolerances unless otherwise specified		TERMINAL BLOCK			
					angles	X.±0.5	 title TERMINAL BLOCK PLUGGABLE PCB PLUG, VERTICAL			
					mm	X.X±0.3				
					X'±1"	X.XX±0.1	scale			
					dr	EVIN ZHONG 043014	 dwg no V7xxA1x000J0G type CUSTOMER Drawing			
					enr	EVIN ZHONG 043014				
					chr	HANKE FENG 043014				
					appd	SHI JUN 043014				
sheet index	revision	A		1						