NOTES:

1. MATERIALS AND FINISHES(PLATING THICKNESS IN MICRO-INCHES): BODY - BRASS, SILVER PLATING

CONTACT - BRASS & BERYLLIUM COPPER, SILVER PLATING INSULATOR - PTFE, NATURAL

ELECTRICAL:


A. IMPEDANCE: 50 OHM


B. FREQUENCY RANGE: DC 0-4 GHz C. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS, MIN.

MECHANICAL:

A. DURABILITY: 500 CYCLES MIN.

B. TEMPERATURE RANGE: - 65°C to +165°C



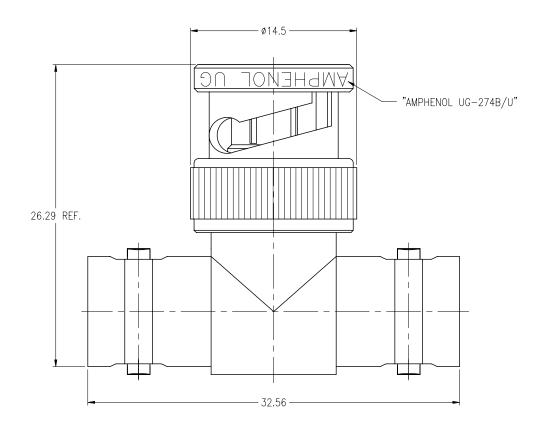

THIRD ANGLE PROJ.

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES ±0.05mm ±0.1mm +0.2mm ± 0.3mm ±1.*	MATERIAL	DRAWN R.MAO	DATE 12-Dec-11	TITLE BNC TEE ADAPTOR			Amphenol RF Danbury CT USA, Tainan Taiwan, Shenzhen China www.amphenolrf.com	
NOTICE — These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are	REFERENCE -	ENGINEER C.WANG	DATE	UG-274B/U				
		APPROVED	21-Dec-09 DATE				DRAWING NO.	31-2208
		S.HSIEH	12-Dec-11	SCALE: 3/1	*/ *		ITEM NO.	31-2208
		CAD FILE		DWG SIZE	DWG SIZE CODE ID REV			
	FINISH	F:\DWG\CNPD\31\2208-AJSZ		В	74868	AJ	PART NO.	31-2208