

THE R M O M E T R I C S  
A COMMITMENT TO EXCELLENCE

# GE-2133

## General Fluid Temperature Sensors



Thermometrics GE-2133 Series of General Fluid Temperature Sensors measures and monitors the temperature of a variety of fluids. The spring clip design secures the sensor in place and provides a quick means for installation and removal. (Clip is not included.)

### Applications

- Battery Coolant Temperature
- Refrigerant Temperature
- Outside Air Temperature
- Engine Coolant Temperature

### Features

- Low price
- High sensitivity
- Wide application range
- Compact design
- Easy installation
- Validated to ISO 16750-Z-A-O-D-A
- Mounting Clip available separately through Amphenol Advanced Sensors or Distribution as the RV-2039

**Amphenol**  
Advanced Sensors

# GE-2133 Specifications

## Operating Temperature:

-40°F to 257°F (-40°C to 125°C)

## Storage Temperature:

-40°F to 194°F (-40°C to 90°C)

## Response time:

Less than 10 seconds in liquid; less than 25 seconds in air.

	GE-2133
R25°C (77°F)	9,850 – 10,150 Ω
B(25/85)°C	3957 - 3990

## Housing Material

Polyamide 6/6

## Weight

3.4 grams

## Mating Connector



FEP 42831300 or Equivalent, USCAR 2 Way 1.2MM Sealed System per USCAR 120-S-002-1-Z02 KEY Option A, Mating Terminals to be Tin Plated. Connection system rated to IPX 4K X 9K.

## RvT Table\*

GE-2133		
Temp. (°C)	Resistance (Ω)	Tolerance (+/-)
-40	332,776	5.95
-20	96,481	4.24
0	32,566	2.71
20	12,486	1.72
25	10,000	1.50
60	2,490	2.84
100	678.1	4.19
120	387.3	4.59
125	339.5	4.69

\*Other resistance and tolerance options are possible.

## Dimensions

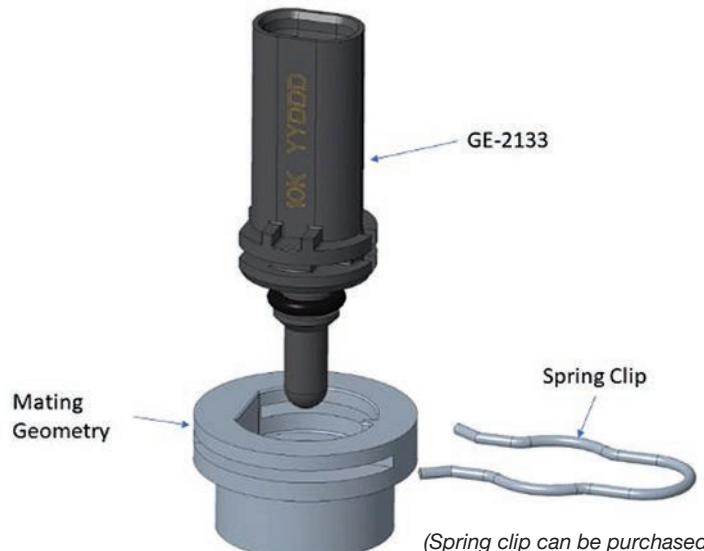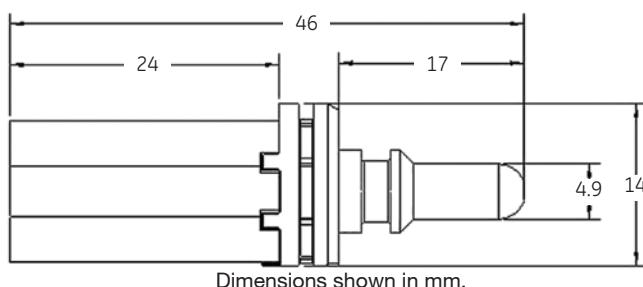

**Amphenol**  
**Advanced Sensors**

[www.amphenol-sensors.com](http://www.amphenol-sensors.com)

© 2021 Amphenol Corporation. All Rights Reserved. Specifications are subject to change without notice. Other company names and product names used in this document are the registered trademarks or trademarks of their respective owners.

AAS-920-748C - 09/2021