
Downloaded from Arrow.com.

SH NO.	M CODE	MADE FROM

GSD

UG-201A/U

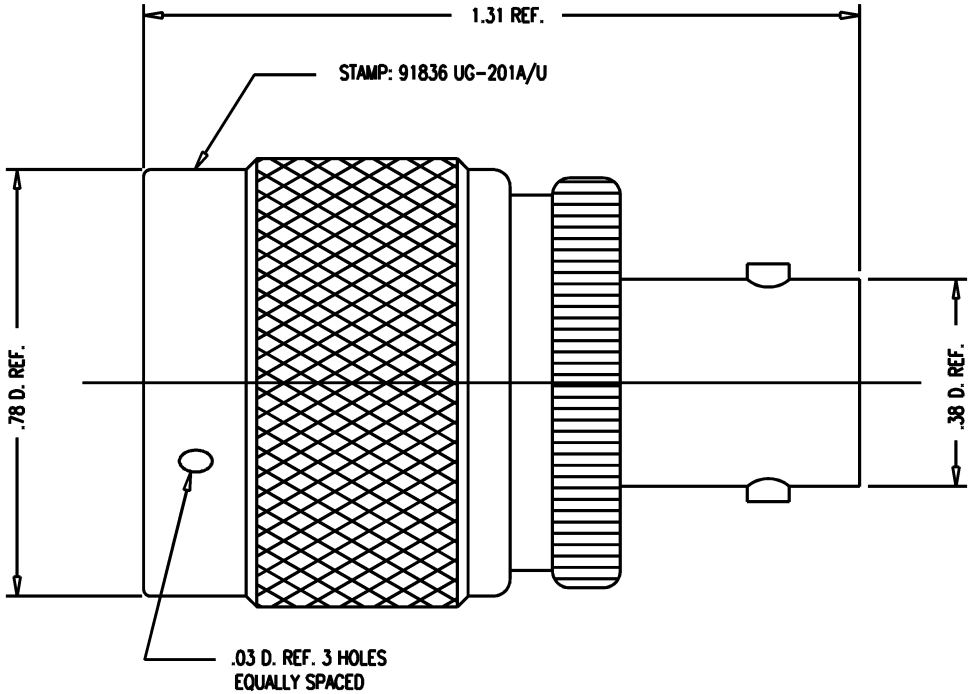

NOTES:
1. INTERFACE PER MIL-STD-348, FIG. 304-1 (N) AND 301-2 (BNC).
2. MATERIALS:
   INSULATOR: TEFLON, ASTM-D-4894
   GASKET: SILICONE RUBBER, ZZ-R-765
   C-RING, OUTER CONTACT } PHOSPHOR BRONZE, ASTM-B-103
   CENTER CONTACT: BER. COPPER, ASTM-B-196
   ALL OTHER METAL PARTS: BRASS, ASTM-B16
3. FINISHES:
   ALL METAL PARTS: SILVER PLATE PER QQ-S-365
4. ELECTRIAL CHARACTERISTICS:
   NOMINAL IMPEDANCE: 50 ~W
   FREQUENCY RANGE: DC TO 11 GHz
   WORKING VOLTAGE: 500 VOLTS RMS

GSD

REVISIONS	
ISSUE	CHANGES
8	CN 36539 C REDRAWN ME 09/01/95

QGS0801

SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF:	

ADAPTER N(M) TO BNC(F)

DRAWN	ME	09/01/95
DESIGN	AR	09/01/95
APPR.		DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

UG-201A/U

MAY 2007 THIS DRAWING BECAME THE PROPERTY OF PROPERTY OF
WINCHESTER ELECTRONICS CORPORATION, WALLINGFORD, CT 06492