
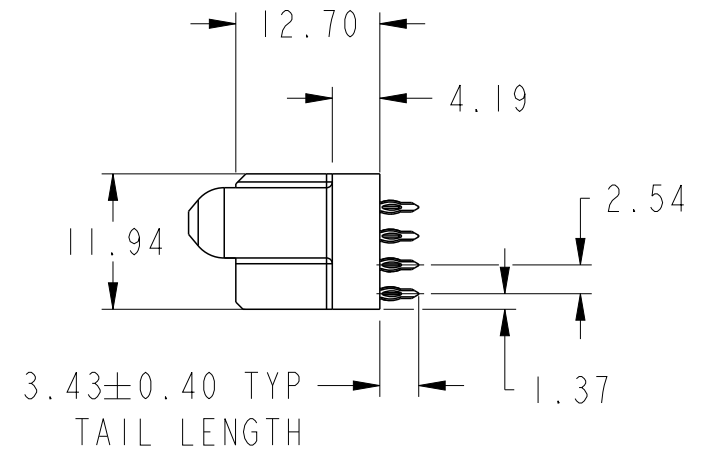
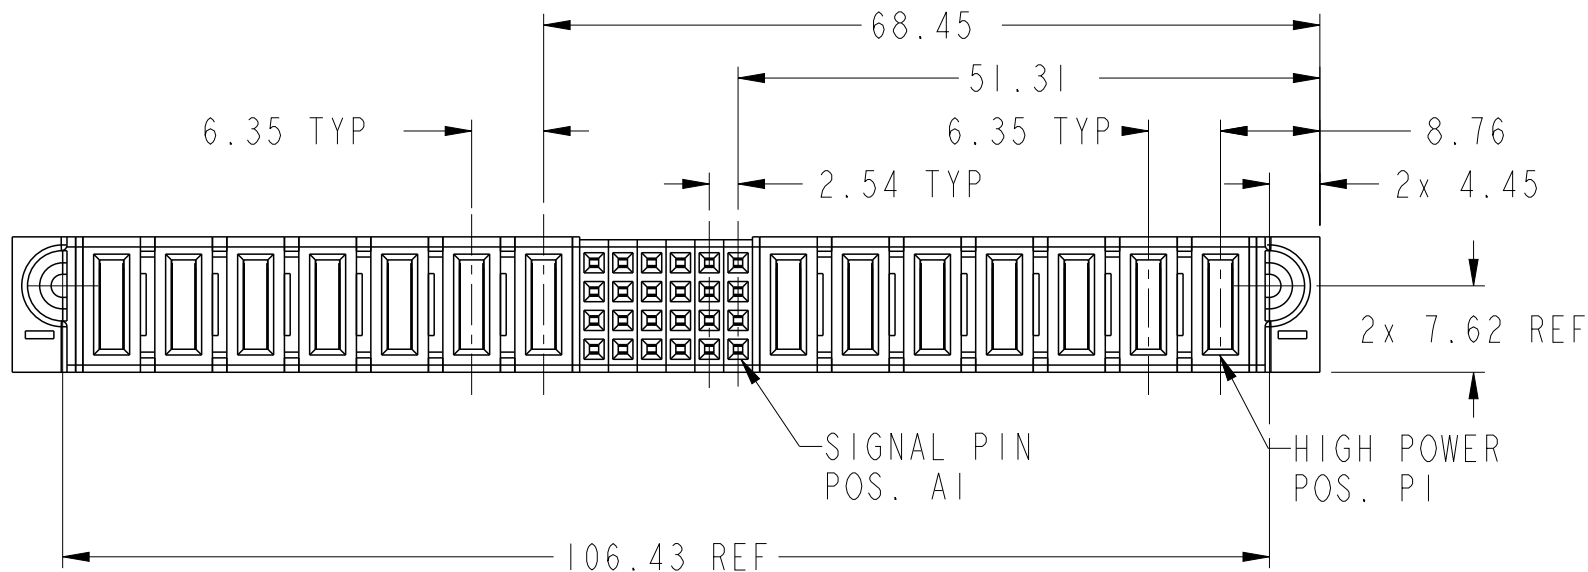
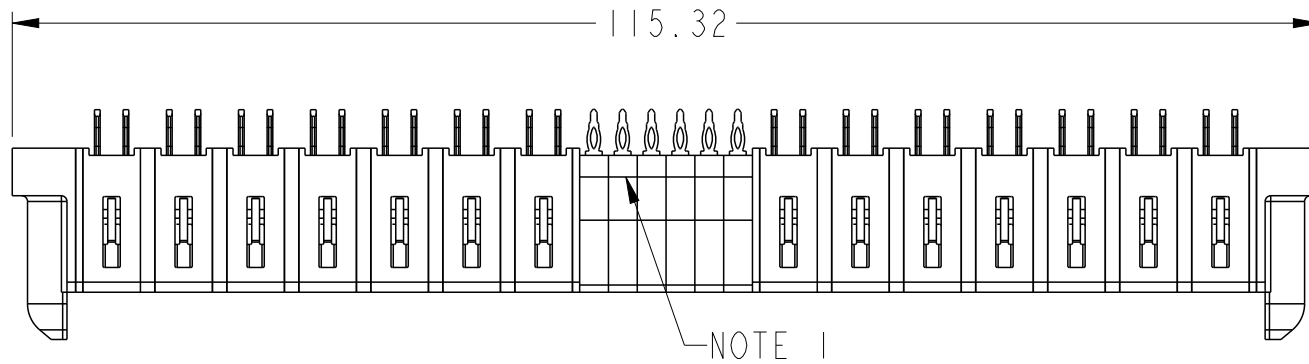



PRODUCT NUMBER SEE SHEET 2

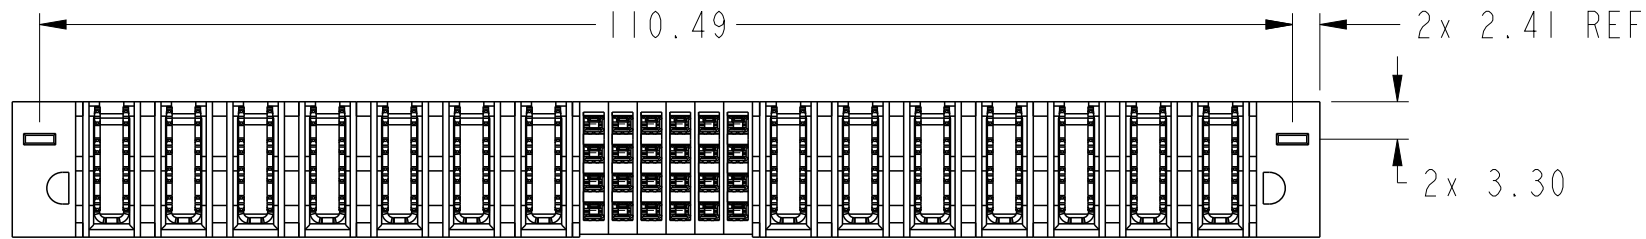

spec ref				dr	Rainbow Zhan	2014/07/27	projection 	MM 	size	A3	scale	3:2
tolerance std ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Rainbow Zhan	2014/08/07			ecn no	-		
				chr	Li- He	2014/08/06						
				appr	Pei-Ming Zheng	2014/08/07					product family	
surface 	linear	0.X	±0.50		title 7HP + 24S + 7HP VT PF RECEPTACLE				dwg no 10106131-E006001	rev A		
		0.XX	±0.25									
		0.XXX	±0.10									
	ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.		Product - Customer Drw			sheet 1 of 3	

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
 - HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
 - SIGNAL CONTACT - COPPER ALLOY.
 - POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE
MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.

dr	Rainbow Zhan	2014/07/27	projection 	MM 	size	scale
eng	Rainbow Zhan	2014/08/07			A3	1:1
chr	Li- He	2014/08/06			ecn no	-
appr	Pei-Ming Zheng	2014/08/07			rel level	Released
			product family	PowerBlade+		
 7HP + 24S + 7HP VT PF RECEPTACLE			dwg no	10106131-E006001		rev
www.fci.com			cat. no.	Product - Customer Drw		
				sheet 3 of 3		A



Copyright FCI.