

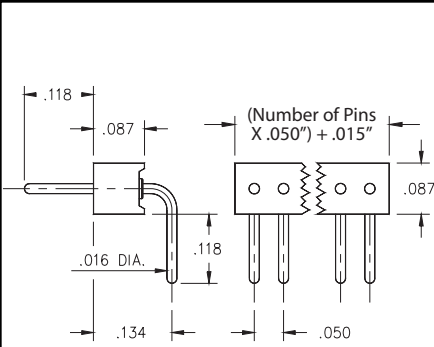


Fig. 1

- Series 850 and 851 interconnects are available in single and double row form.
- Headers (850 & 852) use MM# 4006-1, -2 pins. (See page 166 for details)
- Sockets (851 & 853) use MM# 4890-1, -2 receptacles that accept pin diameters from .015-.021. (See page 129 for details)
- Insulators are high temp. thermo-plastic.

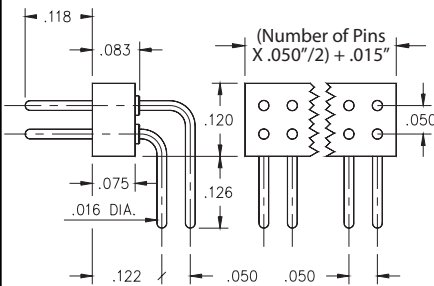
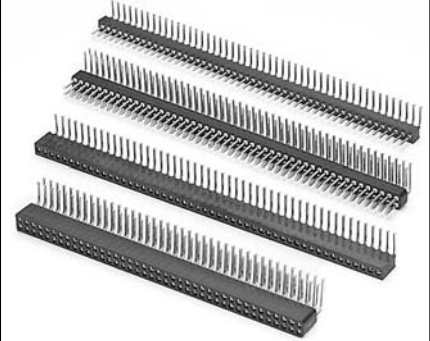


Fig. 2

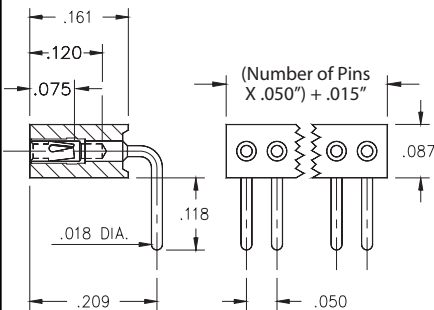


Fig. 3

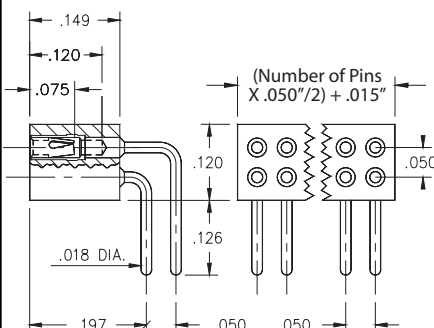


Fig. 4

Ordering Information

Fig. 1	Single Row	Right Angle Pin Header						
	850-XX-0__-20-001000							
	Specify # of pins	└──────────┘ 01-50						
Fig. 2	Double Row	Right Angle Pin Header						
	852-XX-__-20-001000							
	Specify # of pins	└──────────┘ 002-100						
 XX= Plating Code See Below								
SPECIFY PLATING CODE XX=		10◇	90	40◇				
Pin Plating 		10μ" Au	200μ" Sn/Pb	200μ" Sn				
Fig. 3	Single Row	Right Angle Socket						
	851-XX-0__-20-001000							
	Specify # of pins	└──────────┘ 01-50						
Fig. 4	Double Row	Right Angle Socket						
	853-XX-__-20-001000							
	Specify # of pins	└──────────┘ 002-100						
 XX= Plating Code See Below								
SPECIFY PLATING CODE XX=		13◇		93	99		43◇	44◇
Sleeve (Pin) 		10μ" Au		200μ" Sn/Pb	200μ" Sn/Pb		200μ" Sn	200μ" Sn
Contact (Clip) 		30μ" Au		30μ" Au	200μ" Sn/Pb		30μ" Au	200μ" Sn