





MICRO SWITCH
FREEPOR, ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

SWITCH- ENCLOSED

CATALOG LISTING
4EN1-6
MILITARY STDS PART NO.
MS24331-4



4EN1-6
REPLACES
SR4673
RELEASE NO. SR4673
DRAWING NUMBER M
ISSUE 25230
CHECK 25230
REVISIONS
A C044635
G R T 18 NOV 78
B C0 45674
S L B 9 MAR 79
C C046777
J A P 12 NOV 79
D C073915
S A V 30 OCT 92
E C0 75787-C
D A W 16 MAY 94
F O-52851-A
DRAWN G R T 18 NOV 78
CHECK 27 NOV 78
10/27/94

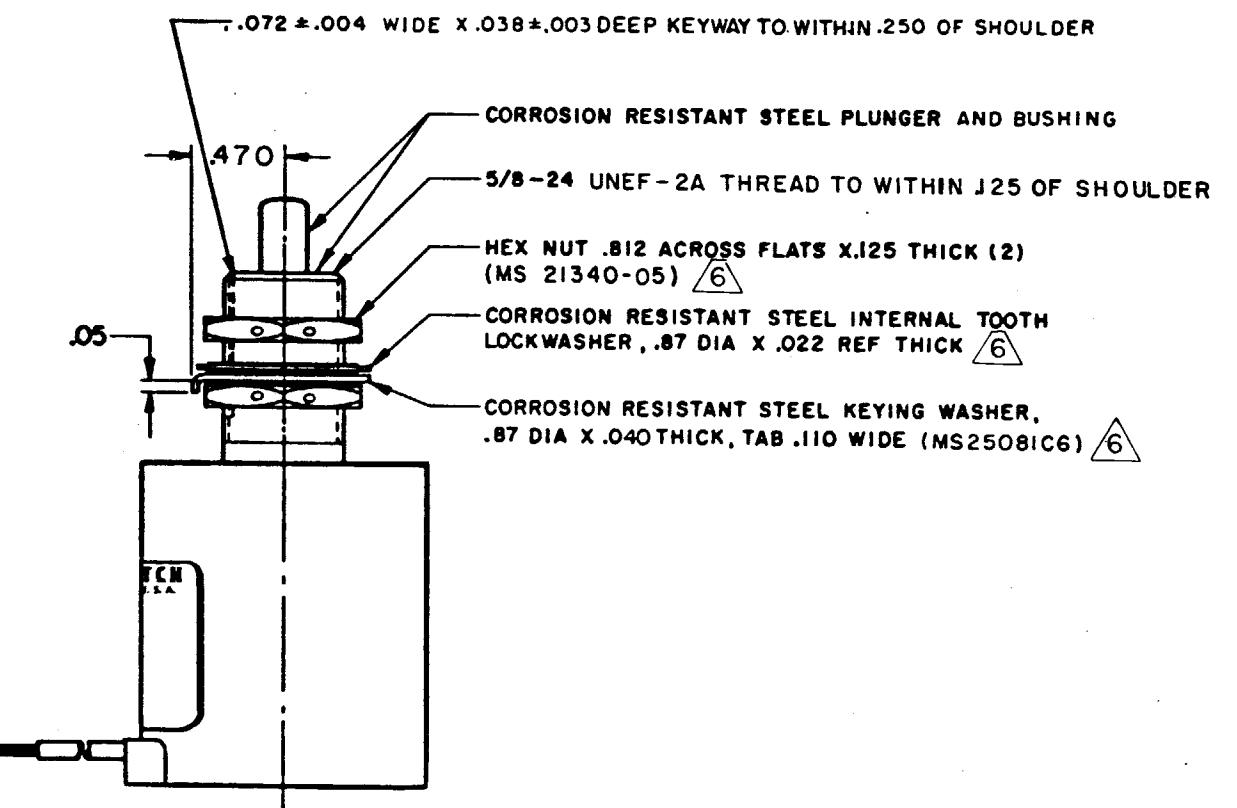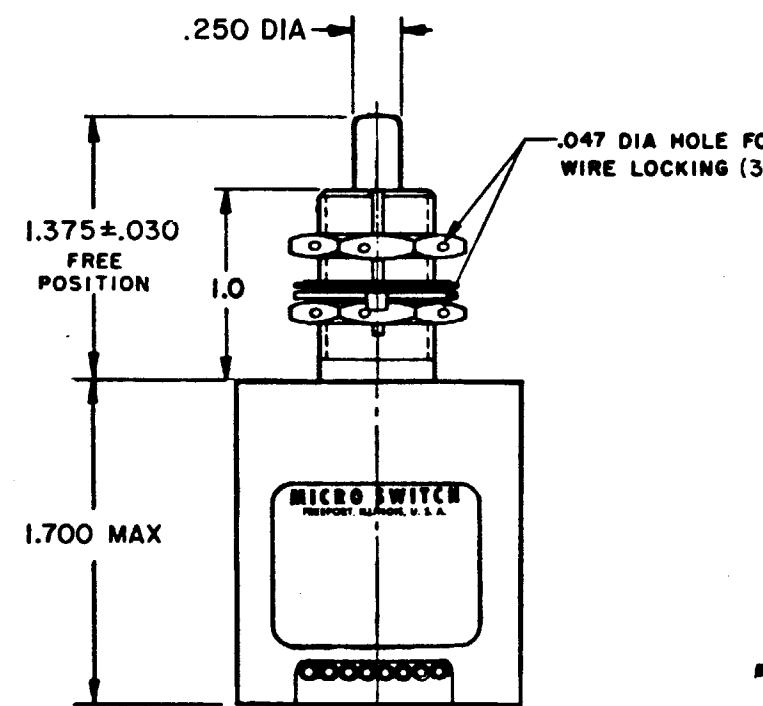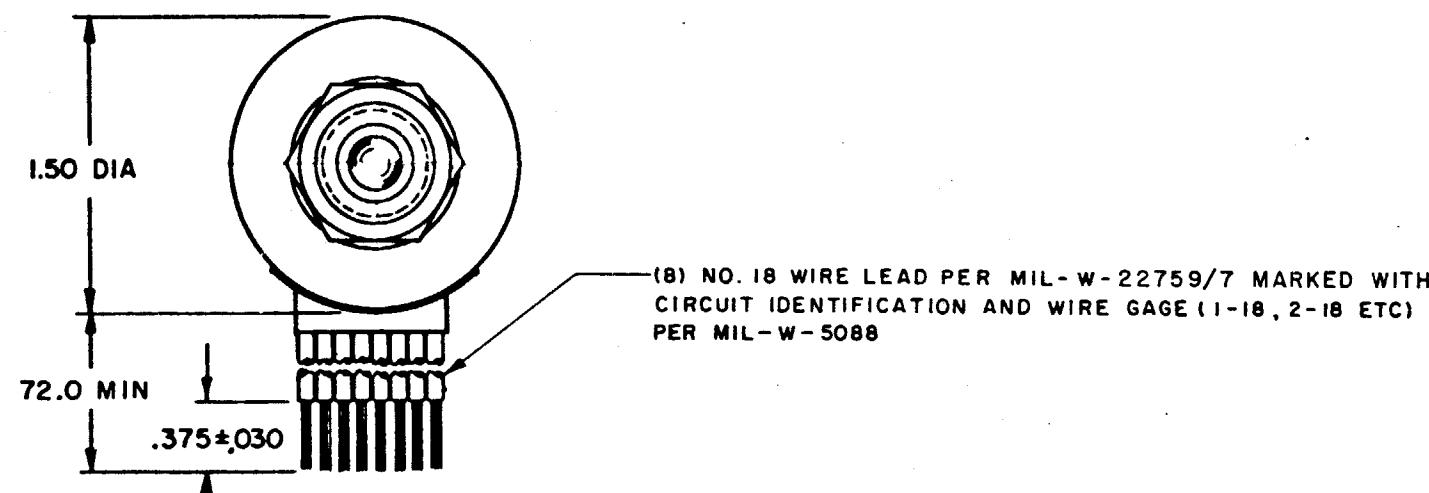

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY
OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT
TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR
REFERENCE. UNLESS NOTED, TOLERANCES ARE \pm

NO. PLACES	MM	TOL. mm/in	IN.	TOL. mm/in
ONE PLACE	X	.04	.016	.003
TWO PLACES	X	.04	.016	.003
THREE PLACES	X	.016	.0006	.0015
ANGLES	X	X	X	X

SI METRIC U.S. CUSTOMARY

DESIGN UNITS

RAW MATERIAL-COMMERCIAL STANDARD
MICRO SWITCH STANDARDS APPLY

DIMENSIONS ARE TO BE MET BEFORE
PROTECTIVE COATINGS ARE APPLIED

WEIGHT .84 LB

NOTES

- CORROSION RESISTANT STEEL ENCLOSURE
- SWITCH SEALED PER MIL-S-8805 SYMBOL 4
- CIRCUIT DIAGRAM, CATALOG LISTING, AND MILITARY STANDARD NO. MS 24331-4 ARE SHOWN ON NAMEPLATE
- COINCIDENCE OF OPERATING AND RELEASING POINTS:
.010 INCH OF PLUNGER TRAVEL
- APPLICATION INFORMATION ONLY
HARDWARE MAY BE PACKAGED UNASSEMBLED
PER MIL-S-8805