

REVISIONS			
LTR	DESCRIPTION	DATE (YR-MO-DA)	APPROVED
A	Update the boilerplate to current requirements as specified in MIL-PRF-38535. Editorial changes throughout. – jak	06-05-01	Thomas M. Hess
B	Add footnote 5/ for test condition of total power supply current (I_{CC}) to table I. Update boilerplate paragraphs to the current MIL-PRF-38535 requirements. - LTG	10-01-19	Thomas M. Hess
C	Update high and low voltage (V_{OH} and V_{OL}) test condition V_{IH} and V_{IL} limits to table I. Update boilerplate paragraphs to the current MIL-PRF-38535 requirements. - LTG	15-11-19	Thomas M. Hess
D	Add device manufacturer cage code 3D TT2 for supplying device types 01-02. Update boilerplate paragraphs as required by MIL-PRF-38535. - MAA	16-10-13	Thomas M. Hess
E	Update devices supplier CAGE 0C7V7 information to bulletin page. Update boilerplate paragraphs to the current MIL-PRF-38535 requirements. - TTM	22-09-26	Muhammad A. Akbar




THE ORIGINAL FIRST SHEET OF THIS DRAWING HAS BEEN REPLACED.

Revision Status of Sheets																						
REV																						
SHEET																						
REV	E	E	E	E	E	E	E	E	E	E												
SHEET	1	2	3	4	5	6	7	8	9	10												
PMIC N/A																						
STANDARD MICROCIRCUIT DRAWING THIS DRAWING IS AVAILABLE FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE AMSC N/A											PREPARED BY Marcia B. Kelleher					DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990 https://www.dla.mil/LandandMaritime						
											CHECKED BY Monica L. Poelking											
											APPROVED BY Michael A. Frye					MICROCIRCUIT, DIGITAL, FAST CMOS, NONINVERTING OCTAL BUFFER/LINE DRIVER WITH THREE-STATE OUTPUTS, TTL COMPATIBLE INPUTS, MONOLITHIC SILICON						
											DRAWING APPROVAL DATE 89-09-14											
											REVISION LEVEL E					SIZE A	CAGE CODE 67268		5962-89766			
											SHEET 1 OF 10											

1. SCOPE

1.1 Scope. This drawing describes device requirements for MIL-STD-883 compliant, non-JAN class level B microcircuits in accordance with MIL-PRF-38535, appendix A.

1.2 Part or Identifying Number (PIN). The PIN is as shown in the following example:

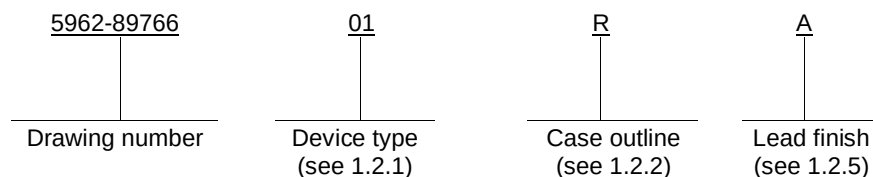

1.2.1 Device type(s). The device type(s) identify the circuit function as follows:

Device type	Generic number	Circuit function
01	54FCT541	Noninverting octal buffer/line driver with three-state outputs, TTL compatible inputs
02	54FCT541A	Noninverting octal buffer/line driver with three-state outputs, TTL compatible inputs

1.2.2 Case outline(s). The case outline(s) are as designated in MIL-STD-1835 and as follows:

Outline letter	Descriptive designator	Terminals	Package style
R	GDIP1-T20 or CDIP2-T20	20	Dual-in-line
S	GDFP2-F20 or CDFP3-F20	20	Flat pack
2	CQCC1-N20	20	Square leadless chip carrier

1.2.3 Lead finish. The lead finish is as specified in MIL-PRF-38535, appendix A.

1.3 Absolute maximum ratings. 1/ 2/

Supply voltage range (V_{CC})	-0.5 V dc to +7.0 V dc
Input voltage range (V_{IN})	-0.5 V dc to $V_{CC} + 0.5$ V dc
Output voltage range (V_{OUT})	-0.5 V dc to $V_{CC} + 0.5$ V dc
DC input diode current (I_{IK})	-20 mA
DC output diode current (I_{OK})	-50 mA
DC output current (I_{OUT})	± 100 mA
Maximum power dissipation (P_D)	500 mW 3/
Storage temperature range (T_{STG})	-65°C to +150°C
Lead temperature (soldering, 10 seconds)	+300°C
Thermal resistance, junction-to-case (θ_{JC})	See MIL-STD-1835
Junction temperature (T_J)	+175°C

1.4 Recommended operating conditions.

Supply voltage range (V_{CC})	+4.5 V dc to +5.5 V dc
Maximum low level input voltage (V_{IL})	0.8 V dc
Minimum high level input voltage (V_{IH})	2.0 V dc
Case operating temperature range (T_C)	-55°C to +125°C

1/ Stresses above the absolute maximum rating may cause permanent damage to the device. Extended operation at the maximum levels may degrade performance and affect reliability.

2/ Unless otherwise specified, all voltages are referenced to ground.

3/ Must withstand the added P_D due to short circuit test; e.g., I_{OS} .

**2STANDARD
MICROCIRCUIT DRAWING**
DLA LAND AND MARITIME
COLUMBUS, OHIO 43218-3990

SIZE
A

REVISION LEVEL
E

5962-89766

SHEET **2**

2. APPLICABLE DOCUMENTS

2.1 Government specification, standards, and handbooks. The following specification, standards, and handbooks form a part of this drawing to the extent specified herein. Unless otherwise specified, the issues of these documents are those cited in the solicitation or contract.

DEPARTMENT OF DEFENSE SPECIFICATION

MIL-PRF-38535.- Integrated Circuits, Manufacturing, General Specification for.

DEPARTMENT OF DEFENSE STANDARDS

MIL-STD-883 - Test Method Standard Microcircuits.

MIL-STD-1835 - . Interface Standard Electronic Component Case Outlines.

DEPARTMENT OF DEFENSE HANDBOOKS

MIL-HDBK-103 - . List of Standard Microcircuit Drawings.

MIL-HDBK-780 - . Standard Microcircuit Drawings.

(Copies of these documents are available online at <https://quicksearch.dla.mil/>.)

2.2 Order of precedence. In the event of a conflict between the text of this drawing and the references cited herein, the text of this drawing takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Item requirements. The individual item requirements shall be in accordance with MIL-PRF-38535, appendix A for non-JAN class level B devices and as specified herein. Product built to this drawing that is produced by a Qualified Manufacturer Listing (QML) certified and qualified manufacturer or a manufacturer who has been granted transitional certification to MIL-PRF-38535 may be processed as QML product in accordance with the manufacturers approved program plan and qualifying activity approval in accordance with MIL-PRF-38535. This QML flow as documented in the Quality Management (QM) plan may make modifications to the requirements herein. These modifications shall not affect form, fit, or function of the device. These modifications shall not affect the PIN as described herein. A "Q" or "QML" certification mark in accordance with MIL-PRF-38535 is required to identify when the QML flow option is used.

3.2 Design, construction, and physical dimensions. The design, construction, and physical dimensions shall be as specified in MIL-PRF-38535, appendix A and herein.

3.2.1 Case outlines. The case outlines shall be in accordance with 1.2.2 herein.

3.2.2 Terminal connections. The terminal connections shall be as specified on figure 1.

3.2.3 Truth table. The truth table shall be as specified on figure 2.

3.2.4 Logic diagram. The logic diagram shall be as specified on figure 3.

3.2.5 Switching waveforms and test circuit. The switching waveforms and test circuit shall be as specified on figure 4.

3.3 Electrical performance characteristics. Unless otherwise specified herein, the electrical performance characteristics are as specified in table I and shall apply over the full case operating temperature range.

3STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-89766
		REVISION LEVEL E	SHEET 3

3.4 Electrical test requirements. The electrical test requirements shall be the subgroups specified in table II. The electrical tests for each subgroup are described in table I.

3.5 Marking. Marking shall be in accordance with MIL-PRF-38535, appendix A. The part shall be marked with the PIN listed in 1.2 herein. In addition, the manufacturer's PIN may also be marked. For packages where marking of the entire SMD PIN number is not feasible due to space limitations, the manufacturer has the option of not marking the "5962-" on the device.

3.5.1 Certification/compliance mark. A compliance indicator "C" shall be marked on all non-JAN devices built in compliance to MIL-PRF-38535, appendix A. The compliance indicator "C" shall be replaced with a "Q" or "QML" certification mark in accordance with MIL-PRF-38535 to identify when the QML flow option is used.

3.6 Certificate of compliance. A certificate of compliance shall be required from a manufacturer in order to be listed as an approved source of supply in MIL-HDBK-103 (see 6.6 herein). The certificate of compliance submitted to DLA Land and Maritime -VA prior to listing as an approved source of supply shall affirm that the manufacturer's product meets the requirements of MIL-PRF-38535, appendix A and the requirements herein.

3.7 Certificate of conformance. A certificate of conformance as required in MIL-PRF-38535, appendix A shall be provided with each lot of microcircuits delivered to this drawing.

3.8 Notification of change. Notification of change to DLA Land and Maritime -VA shall be required for any change that affects this drawing.

3.9 Verification and review. DLA Land and Maritime, DLA Land and Maritime's agent, and the acquiring activity retain the option to review the manufacturer's facility and applicable required documentation. Offshore documentation shall be made available onshore at the option of the reviewer.

4STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-89766
		REVISION LEVEL E	SHEET 4

TABLE I. Electrical performance characteristics.

Test	Symbol	Test conditions <u>1/</u> -55°C ≤ T _C ≤ +125°C V _{CC} = 5.0 V dc ±10% unless otherwise specified		V _{CC}	Device type	Group A subgroups	Limits		Unit
							Min	Max	
High level output voltage	V _{OH}	V _{IN} = V _{IH} = 2.0 V or V _{IL} = 0.8 V	I _{OH} = -300 μA I _{OH} = -12 mA	4.5 V 4.5 V	All	1, 2, 3	4.3 2.4		V
Low level output voltage	V _{OL}	V _{IN} = V _{IH} = 2.0 V or V _{IL} = 0.8 V	I _{OL} = +300 μA I _{OL} = +48 mA	4.5 V 4.5 V	All	1, 2, 3		0.2 0.55	V
Input clamp voltage	V _{IK}	I _{IN} = -18 mA		4.5 V	All	1, 2, 3		-1.2	V
High level input current	I _{IH}	V _{IN} = 5.5 V		5.5 V	All	1, 2, 3		5.0	μA
Low level input current	I _{IL}	V _{IN} = GND		5.5 V	All	1, 2, 3		-5.0	μA
High impedance output current	I _{OZH}	V _{IN} = 5.5 V		5.5 V	All	1, 2, 3		10.0	μA
	I _{OZL}	V _{IN} = GND		5.5 V	All	1, 2, 3		-10.0	μA
Short circuit output current	I _{OS} <u>1/</u>	V _{OUT} = GND		5.5 V	All	1, 2, 3	-60		mA
Quiescent power supply current (CMOS inputs)	I _{CCQ}	V _{IN} ≤ 0.2 V or V _{IN} ≥ 5.3 V f _{in} = 0 MHz		5.5 V	All	1, 2, 3		1.5	mA
Quiescent power supply current (TTL inputs)	ΔI _{CC} <u>2/</u>	V _{IN} = 3.4 V		5.5 V	All	1, 2, 3		2.0	mA
Dynamic power supply current	I _{CCD}	$\overline{OE}A = \overline{OE}B = \text{GND}$ One bit toggling, 50% duty cycle V _{IN} ≤ 0.2 V or V _{IN} ≥ 5.3 V Outputs open		5.5 V	All	<u>3/</u>		0.4	mA/ MHz
Total power supply current	I _{CC} <u>4/ 5/</u>	V _{IN} ≤ 0.2 V or V _{IN} ≥ 5.3 V $\overline{OE}A = \overline{OE}B = \text{GND}$ One bit toggling, 50% duty cycle Outputs open, f _i = 10 MHz		5.5 V	All	1, 2, 3		5.5	mA
		V _{IN} = GND or V _{IN} = 3.4 V $\overline{OE}A = \overline{OE}B = \text{GND}$ One bit toggling, 50% duty cycle Outputs open, f _i = 10 MHz		5.5 V	All	1, 2, 3		6.0	mA
Input capacitance	C _{IN}	See 4.3.1c			All	4		10	pF
Output capacitance	C _{OUT}	See 4.3.1c			All	4		12	pF
Functional tests		See 4.3.1d		4.5 V	All	7, 8			
Propagation delay time, Dn to On	t _{PHL} , t _{PLH} <u>6/</u>	C _L = 50 pF R _L = 500Ω See figure 4		4.5 V	01	9, 10, 11	2.0	9.0	ns
					02		2.0	5.1	
Propagation delay time, output enable, $\overline{OE}A$ or $\overline{OE}B$ to On	t _{PZH} , t _{PZL} <u>6/</u>			4.5 V	01	9, 10, 11	2.0	12.5	ns
					02		2.0	6.5	
Propagation delay time, output disable, $\overline{OE}A$ or $\overline{OE}B$ to On	t _{PHZ} , t _{PLZ} <u>6/</u>			4.5 V	01	9, 10, 11	2.0	12.5	ns
					02		2.0	5.9	

See footnotes on next sheet.

5STANDARD
MICROCIRCUIT DRAWING
 DLA LAND AND MARITIME
 COLUMBUS, OHIO 43218-3990

SIZE
A

REVISION LEVEL
E

5962-89766**SHEET 5**

TABLE I. Electrical performance characteristics – Continued.

- 1/ Not more than one output should be shorted at one time, and the duration of the short circuit condition should not exceed one second.
- 2/ TTL driven input ($V_{IN} = 3.4 \text{ V}$); all other inputs at V_{CC} or GND.
- 3/ This parameter is not directly testable, but is derived for use in total power supply calculations.
- 4/ $I_{CC} = I_{CCQ} + (\Delta I_{CC} \times D_H \times N_T) + (I_{CCD} \times f_i \times N_i)$
 Where: D_H = Duty cycle for TTL inputs high.
 N_T = Number of TTL inputs at D_H .
 f_i = Input frequency in MHz.
 N_i = Number of inputs at f_i .
- 5/ For I_{CC} test in an ATE environment, the effect of parasitic output capacitive loading from the test environment must be taken into account, as its effect is not intended to be included in the test results. The impact must be characterized and appropriate offset factors must be applied to the test result.
- 6/ The minimum limits are guaranteed, if not tested, to the specified limits.

Device types	01 and 02
Case outlines	R, S, and 2
Terminal number	Terminal symbol
1	$\overline{OEA}$
2	D0
3	D1
4	D2
5	D3
6	D4
7	D5
8	D6
9	D7
10	GND
11	O7
12	O6
13	O5
14	O4
15	O3
16	O2
17	O1
18	O0
19	$\overline{OEB}$
20	V_{CC}

FIGURE 1. Terminal connections.

6STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-89766
		REVISION LEVEL E	SHEET 6

Device types 01 and 02			
Inputs			Outputs
$\overline{OE}A$	$\overline{OE}B$	Dn	On
L	L	L	L
L	L	H	H
H	X	X	Z
X	H	X	Z

L = Low voltage level
 H = High voltage level
 X = Don't care
 Z = High impedance

FIGURE 2. Truth table.


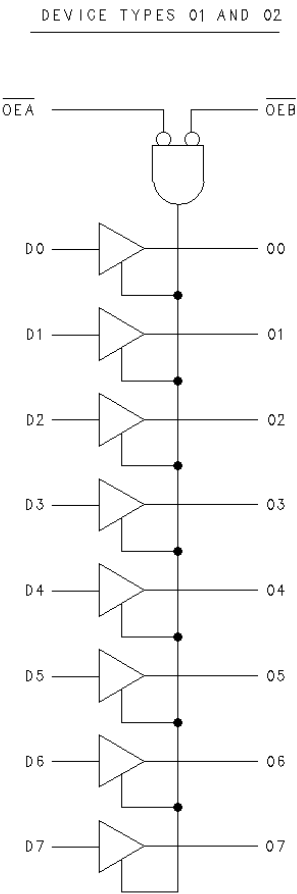


FIGURE 3. Logic diagram.

7STANDARD MICROCIRCUIT DRAWING DLA LAND AND MARITIME COLUMBUS, OHIO 43218-3990	SIZE A		5962-89766
		REVISION LEVEL E	SHEET 7

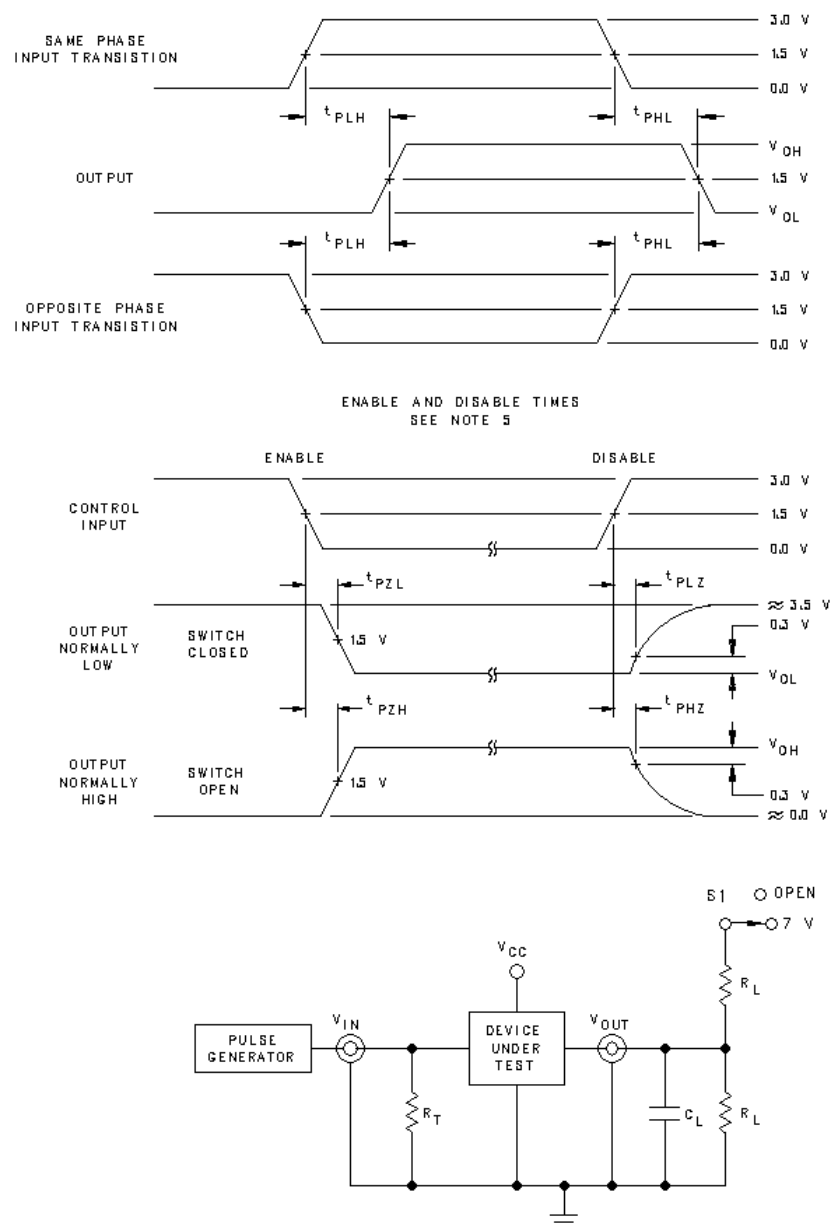

NOTES:

1. When measuring t_{PLH} , t_{PHL} , t_{PZH} and t_{PHZ} : S_1 = Open.
When measuring t_{PLZ} and t_{PZL} : S_1 = Closed.
2. R_L = 500 Ω or equivalent.
3. R_T = 50 Ω or equivalent, terminal resistance which should be equal to Z_{OUT} of the pulse generator.
4. C_L = 50 pF or equivalent (includes test jig and probe capacitance).
5. Diagram shown for input control enable-low and input control disable-high.
6. Pulse generator for all pulses: $t_r \leq 2.5$ ns; $t_f \leq 2.5$ ns.

FIGURE 4. Switching waveforms and test circuit.

8STANDARD
MICROCIRCUIT DRAWING
DLA LAND AND MARITIME
COLUMBUS, OHIO 43218-3990

SIZE
A

REVISION LEVEL
E

5962-89766

SHEET 8

4. VERIFICATION

4.1 Sampling and inspection. Sampling and inspection procedures shall be in accordance with MIL-PRF-38535, appendix A.

4.2 Screening. Screening shall be in accordance with method 5004 of MIL-STD-883, and shall be conducted on all devices prior to quality conformance inspection. The following additional criteria shall apply:

a. Burn-in test, method 1015 of MIL-STD-883.

(1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1015 of MIL-STD-883.

(2) $T_A = +125^{\circ}\text{C}$, minimum.

b. Interim and final electrical test parameters shall be as specified in table II herein, except interim electrical parameter tests prior to burn-in are optional at the discretion of the manufacturer.

TABLE II. Electrical test requirements.

MIL-STD-883 test requirements	Subgroups (in accordance with MIL-STD-883, method 5005, table I)
Interim electrical parameters (method 5004)	1
Final electrical test parameters (method 5004)	1*, 2, 3, 7, 8, 9, 10, 11
Group A test requirements (method 5005)	1, 2, 3, 4, 7, 8, 9, 10, 11
Groups C and D end-point electrical parameters (method 5005)	1, 2, 3

* PDA applies to subgroup 1.

4.3 Quality conformance inspection. Quality conformance inspection shall be in accordance with method 5005 of MIL-STD-883 including groups A, B, C, and D inspections. The following additional criteria shall apply.

4.3.1 Group A inspection.

a. Tests shall be as specified in table II herein.

b. Subgroups 5 and 6 in table I, method 5005 of MIL-STD-883 shall be omitted.

c. Subgroup 4 (C_{IN} measurement) shall be measured only for the initial test and after process or design changes which may affect input capacitance.

d. Subgroups 7 and 8 shall include verification of the truth table.

9STANDARD
MICROCIRCUIT DRAWING
DLA LAND AND MARITIME
COLUMBUS, OHIO 43218-3990

SIZE
A

REVISION LEVEL
E

5962-89766

SHEET **9**

4.3.2 Groups C and D inspections.

- a. End-point electrical parameters shall be as specified in table II herein.
- b. Steady-state life test conditions, method 1005 of MIL-STD-883.
 - (1) Test condition A, B, C, or D. The test circuit shall be maintained by the manufacturer under document revision level control and shall be made available to the preparing or acquiring activity upon request. The test circuit shall specify the inputs, outputs, biases, and power dissipation, as applicable, in accordance with the intent specified in method 1005 of MIL-STD-883.
 - (2) $T_A = +125^{\circ}\text{C}$, minimum.
 - (2) Test duration: 1,000 hours, except as permitted by method 1005 of MIL-STD-883.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-PRF-38535, appendix A.

6. NOTES

6.1 Intended use. Microcircuits conforming to this drawing are intended for use for Government microcircuit applications (original equipment), design applications, and logistics purposes.

6.2 Replaceability. Microcircuits covered by this drawing will replace the same generic device covered by a contractor-prepared specification or drawing.

6.3 Configuration control of SMD's. All proposed changes to existing SMD's will be coordinated with the users of record for the individual documents. This coordination will be accomplished using DD Form 1692, Engineering Change Proposal, or email communication.

6.4 Record of users. Military and industrial users shall inform DLA Land and Maritime when a system application requires configuration control and the applicable SMD to that system. DLA Land and Maritime will maintain a record of users and this list will be used for coordination and distribution of changes to the drawings. Users of drawings covering microelectronics devices (FSC 5962) should contact DLA Land and Maritime-VA, telephone (614) 692-8108.

6.5 Comments. Comments on this drawing should be directed to DLA Land and Maritime-VA, Columbus, Ohio 43218-3990, or telephone (614) 692-0591.

6.6 Approved sources of supply. Approved sources of supply are listed in MIL-HDBK-103 and QML-38535. The vendors listed in MIL-HDBK-103 and QML-38535 have agreed to this drawing and a certificate of compliance (see 3.6 herein) has been submitted to and accepted by DLA Land and Maritime-VA.

**10STANDARD
MICROCIRCUIT DRAWING**
DLA LAND AND MARITIME
COLUMBUS, OHIO 43218-3990

SIZE
A

REVISION LEVEL
E

5962-89766

SHEET **10**

STANDARD MICROCIRCUIT DRAWING BULLETIN

DATE: 22-09-26

Approved sources of supply for SMD 5962-89766 are listed below for immediate acquisition information only and shall be added to MIL-HDBK-103 and QML-38535 during the next revision. MIL-HDBK-103 and QML-38535 will be revised to include the addition or deletion of sources. The vendors listed below have agreed to this drawing and a certificate of compliance has been submitted to and accepted by DLA Land and Maritime-VA. This information bulletin is superseded by the next dated revision of MIL-HDBK-103 and QML-38535. DLA Land and Maritime maintains an online database of all current sources of supply at <https://landandmaritimeapps.dla.mil/Programs/Smcr/>.

Standard microcircuit drawing PIN <u>1</u> /	Vendor CAGE number	Vendor similar PIN <u>2</u> /
5962-8976601RA	0C7V7	IDT54FCT541DB
		54FCT541DMQB
	3DTT2	P54FCT541CMB
5962-8976601SA	0C7V7	IDT54FCT541EB
		54FCT541FMQB
	3DTT2	P54FCT541FSMB
5962-89766012A	0C7V7	IDT54FCT541LB
		54FCT541LMQB
	3DTT2	P54FCT541LMB
5962-8976602RA	0C7V7	IDT54FCT541ADB
	3DTT2	P54FCT541ACMB
5962-8976602SA	0C7V7	IDT54FCT541AEB
	3DTT2	P54FCT541AFSMB
5962-89766022A	0C7V7	IDT54FCT541ALB
	3DTT2	P54FCT541ALMB

1/ The lead finish shown for each PIN representing a hermetic package is the most readily available from the manufacturer listed for that part. If the desired lead finish is not listed contact the vendor to determine its availability.

2/ Caution. Do not use this number for item acquisition. Items acquired to this number may not satisfy the performance requirements of this drawing.

Vendor CAGE
number

0C7V7

3DTT2

Vendor name
and address

Teledyne e2v, Inc.
765 Sycamore Drive
Milpitas, CA 95035

Pyramid Semiconductor
1249 Reamwood Avenue
Sunnyvale, CA 94089

The information contained herein is disseminated for convenience only and the Government assumes no liability whatsoever for any inaccuracies in the information bulletin.