MICRO SWITCH
FREEPORT ILLINOIS. U.S.A
A DIVISION OF HONEYWELL
FED. MFG. CODE 91929

ASSEMBLY – TOGGLE SWITCH

CATALOG LISTING
13AT130

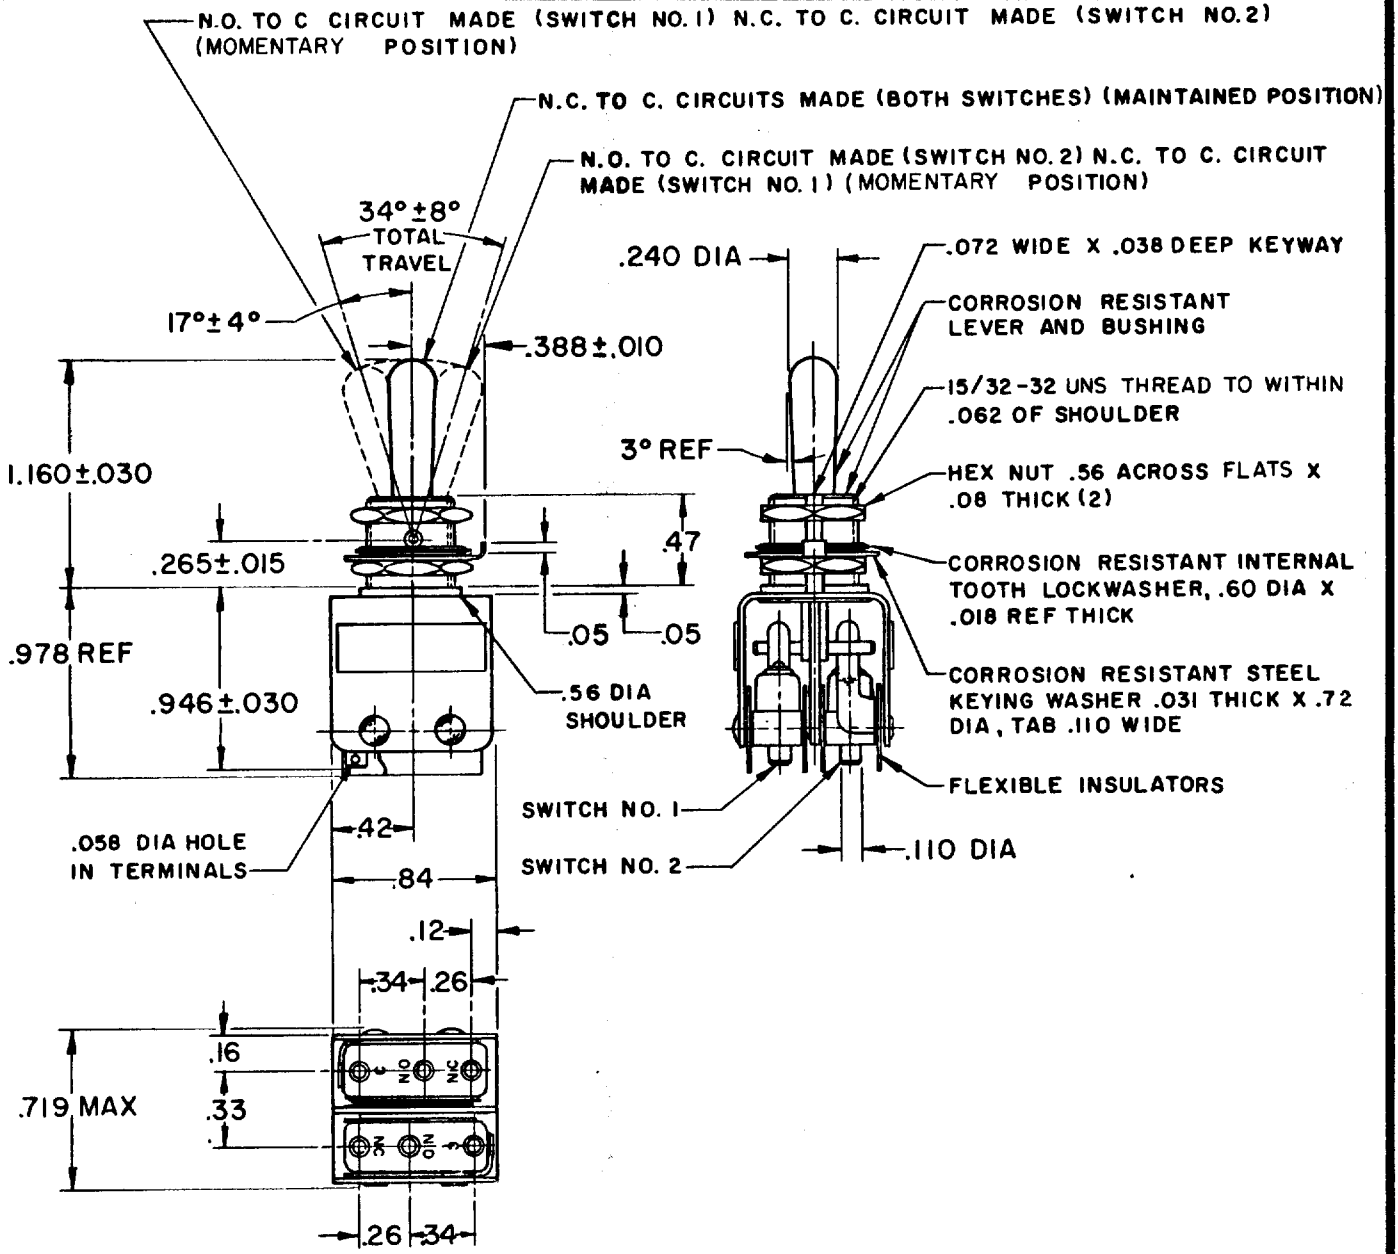

NOTE
1 – UNIT INCLUDES CAT. LIST. 22SM157 TYPE BASIC SWITCH
2 – TERMINALS ARE PLATED FOR SOLDERING

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

CHARACTERISTICS

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T (2)

[redacted] VOLTS DC RATING
([redacted] LEVEL)

INDUCTIVE – – – – – 5 AMP

[redacted]STIVE – – – – – – 10 AMP

SCALE FULL

DO NOT SCALE PRINT

TOLERANCES
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±

	DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in
NO PLACES	X	1/.04		
ONE PLACE	X.X	0.4/.016	X.X	0.8/.03
TWO PLACES	X.XX	0.15/.006	X.XX	0.38/.015
THREE PLACES			X.XXX	0.13/.005
ANGLES				

SI METRIC ☐ US CUSTOMARY ■

DESIGN UNITS

WEIGHT .06 LB

REVISIONS

A	P ORDER	
	C J H 17 MAY 76	
B	PR9084T	
	J M J 13 AUG 80	
C	CO 50566-B	
	WJM 6 MAY 82	
D	CO 52725	
	WJM 2 JUN 83	
E	CO 66089	
	DAW 15 FEB 91	

13AT130 | RELEASE NO. PR-9084-T | REPLACES
DRAWING NUMBER M 6
ISSUE X X X
CHECK 26 APRIL 76
CHECK CEB
CHECK
DRAWN 25 APR 76 GLH
FO-52848-A

Downloaded from Arrow.com.