


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	REVISED PER ECR-23-175984	30MAY2023	BB	DSC

3 STRIPES EQUALLY SPACED
COLOR CODE: RED

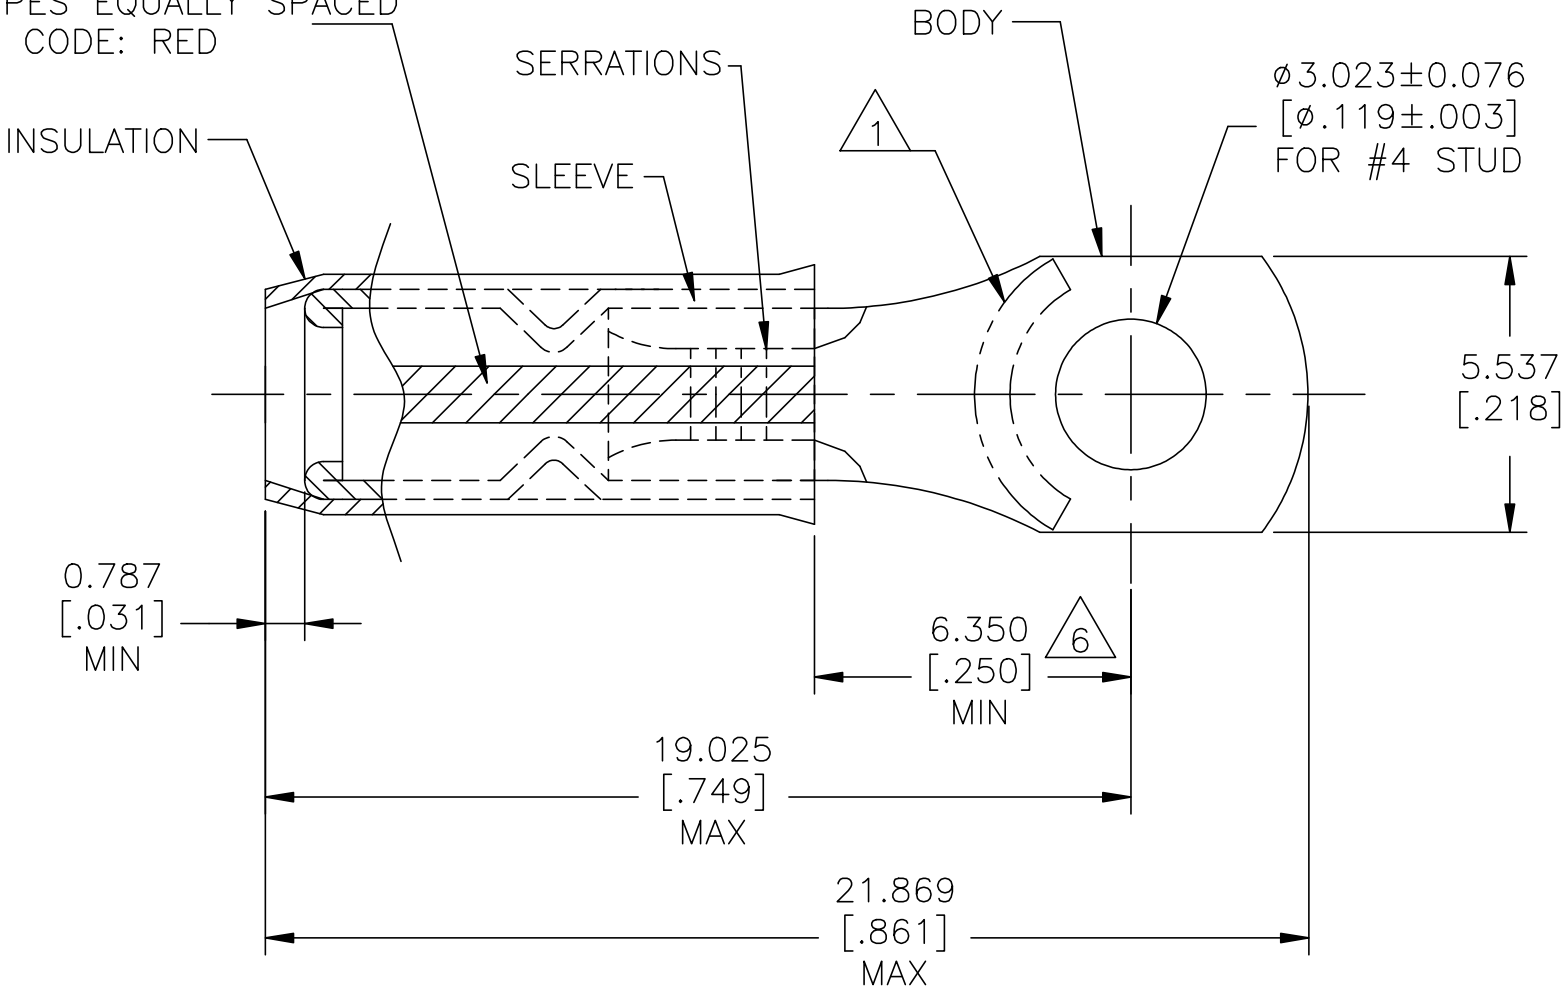

- 1 STAMP "AMP 22-16*" APPROX AS SHOWN
2. WIRE INSULATION DIAMETER:
ø2.870[.113] MAX
3. BODY MATERIAL THK: 0.787±0.051[.031±.002]
- 4 MATERIAL:
BODY & SLEEVE – COPPER PER ASTM B152
INSULATION – NYLON
- 5 FINISH:
BODY & SLEEVE – TIN PLATE 0.00254[.000100]
MIN EXT THK PER ASTM B545
INSULATION COLOR – RED
- 6 APPLIES FROM EDGE OF METAL WIRE BARREL TO
CENTER OF STUD HOLE

100	LOOSE PIECE	132016-1
QTY	PACKAGE TYPE	PART NUMBER

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS			MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F] MAX		THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 12MAY2023 LINGANATHAN P		 TE Connectivity									
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS		PRODUCT INFORMATION CENTER 1-800-522-6752		VOLTAGE RATING: 300 V MAX		DIMENSIONS: mm [INCHES]		TOLERANCES UNLESS OTHERWISE SPECIFIED:				CHK 12MAY2023 SUVARNA, CHETHAN D						
FOR APPLICATION TOOLING INFORMATION		TOOLING ASSISTANCE CENTER 1-800-722-1111		WIRE RANGE: CIRC MIL AREA: 20 0.60mm² [1,186] STRANDED				0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± 0.127[.005] 4 PLC ± - ANGLES ± -		APVD 12MAY2023 SUVARNA, CHETHAN D		NAME TERMINAL, RING TONGUE, IR, PIDG™ WIRE SIZE: 20 AWG						
FOR ORDER ENTRY		1-800-526-5142		THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.						PRODUCT SPEC — APPLICATION SPEC 114-2157 WEIGHT —					SIZE CAGE CODE DRAWING NO RESTRICTED TO A3 00779 C-132016 —			
										CUSTOMER DRAWING			SCALE NTS		SHEET 1 OF 1		REV D	