Adhesive Tape S1278 / S1305

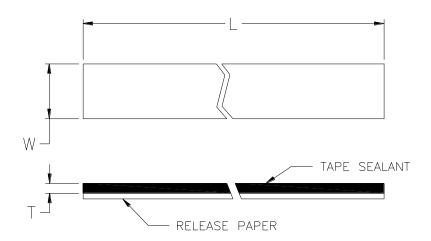


Table of Dimensions:

PART NUMBER	W ± 0.15 <i>(3.8)</i>	T ± 0.015 <i>(3.8)</i>	L (Standard Roll Ref.)
S1278-01	1.00 <i>(25.4)</i>	0.062 (1.574)	25 ft (7.62m)
S1305-01	1.00 (25.4)	0.062 (1.574)	25 ft (7.62m)

Notes:

Gray butyl tape sealant

Blocking prevented by release paper

Shelf life for S1278 from date of manufacture: 12 years Shelf life for S1305 from date of manufacture: 12 years

Material Properties:

ItemSpecification Reference\$1278RW2020\$1305RW2020

Customer Drawing

				Title				
=TE						nesive Tape 278 / S1305		
	Tyco Electronics reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application			Document No. \$1278-\$1305				
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE SHOWN IN BRACKETS			Rev.: A1		_	Rev. Date: October 9,2018		
DRAWN BY: UNGUYEN	CAGE CODE: 06090	Org. Date: 2/8/05	File nar S1278-	ne: S1305.doc	SCALE: None	SIZE:	SHEET: 1 of 2	

©2005-2018 TE Connectivity. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.

Table 2: Properties

	TEST METHOD	S1305	S1278
Physical			
Water absorption	ASTM D570	.75% (nom.)	.1% (nom.)
Specific gravity	ASTM D792	1.56 (nom.)	1.49 (nom.)
Elongation	ASTM D1002	350% - 400%	350% - 400%
Electrical			
Dielectric strength	ASTM D149	250 V/mil (min.)	250 V/mil (min.)
Volume resistivity	ASTM D257	10 ¹⁰ ohm-cm (min.)	10 ¹⁴ ohm-cm (min.)
Thermal			
Low-temperature flexibility		-40°C	-40°C
(non-cracking on ½-inch radius)			
Chemical			
Corrosion	ASTM D2671	Halogen-free,	Noncorrosive
		noncorrosive	(16 hrs. @ 150°C)
Acid gas generation	MIL-C-24643	1.5% (max.)	1.5% (max.)
HCI equivalent			

Customer Drawing

Rev. Date:	Rev.:	Document No.	Sheet:
10/09/18	A1	S1278-S1305	2 of 2