ESH Series, +105°C



Overview


KEMET's ESH Series of single-ended aluminum electrolytic capacitors offer high CV and are designed for high quality, high reliability applications requiring a miniature solution.

Applications

Typical applications include general purpose coupling, decoupling, bypass and filtering.

Benefits

- · Suited for high quality, high reliability applications
- · High CV
- · 2,000 hour operating life
- Operating temperature of up to +105°C
- Case with Ø D ≥ 5 mm
- · Safety vent on the capacitor base



Part Number System

ESH	107	M	6R3		Α	C3	AA				
Series	Capacitance Code (pF)	Tolerance	Rated Voltage (VDC)		~		~		Electrical Parameters	Size Code	Packaging
Single-Ended Aluminum Electrolytic	First two digits represent significant figures for capacitance values. Last digit specifies the number of zeros to be added.	M = ±20%	6R3 = 6.3 010 = 10 016 = 16 025 = 25 035 = 35 050 = 50 063 = 63 100 = 100	160 = 160 200 = 200 250 = 250 350 = 350 400 = 400 420 = 420 450 = 450 500 = 500	A = Standard	See Dimension Table	See Ordering Options Table				



Ordering Options Table

Diameter	Packaging Type	Lead Type	Lead Length (mm)	Lead and Packaging Code						
Standard Bulk Packaging Options										
4 – 22	Bulk (bag)	Straight	20/15 Minimum	AA						
	Standard Auto-Insertion Packaging Options									
4 – 5	Tape & Reel	Formed to 2.5 mm	H ₀ = 16 ±0.75	LA						
6.3	Tape & Reel	2.5 mm Lead Spacing	$H_0 = 18.5 \pm 0.75$	KA						
8	Tape & Reel	Formed to 5 mm	$H_0 = 16 \pm 0.75$	JA						
10 – 13	Ammo	5 mm Lead Spacing	$H_0 = 18.5 \pm 0.75$	EA						
16	Ammo	7.5 mm Lead Spacing	$H_0 = 18.5 \pm 0.75$	EA						
		Other Packaging Option	ons							
4 – 8	Ammo	Formed to 5 mm	$H_0 = 16 \pm 0.75$	DA						
4 – 8	Ammo	Straight	$H_0 = 18.5 \pm 0.75$	EA						
4 – 5	Ammo	Formed to 2.5 mm	$H_0 = 16 \pm 0.75$	FA						
4 – 6.3	Tape & Reel	Formed to 5 mm	$H_0 = 16 \pm 0.75$	JA						
4 – 5, 8 – 16	Tape & Reel	Straight	$H_0 = 18.5 \pm 0.75$	KA						
	Contact KEI	MET for other Lead and F	ackaging options							

Environmental Compliance


As an environmentally conscious company, KEMET is working continuously with improvements concerning the environmental effects of both our capacitors and their production. In Europe (RoHS Directive) and in some other geographical areas like China, legislation has been put in place to prevent the use of some hazardous materials, such as lead (Pb), in electronic equipment. All products in this catalog are produced to help our customers' obligations to guarantee their products and fulfill these legislative requirements. The only material of concern in our products has been lead (Pb), which has been removed from all designs to fulfill the requirement of containing less than 0.1% of lead in any homogeneous material. KEMET will closely follow any changes in legislation world wide and makes any necessary changes in its products, whenever needed.

Some customer segments such as medical, military and automotive electronics may still require the use of lead in electrode coatings. To clarify the situation and distinguish products from each other, a special symbol is used on the packaging labels for RoHS compatible capacitors.


Because of customer requirements, there may appear additional markings such as LF = Lead Free or LFW = Lead Free Wires on the label.



Dimensions – Millimeters

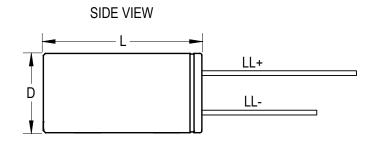

TERMINAL END VIEW



Sizo Codo	1)	L			p	d		LL+/LL-	
Size Code	Nominal	Tolerance								
C3	5	±0.5	11	+1.5/-0	2	±0.5	0.5	Nominal	20/15	Minimum
E3	6.3	±0.5	11	+1.5/-0	2.5	±0.5	0.5	Nominal	20/15	Minimum
G3	8	±0.5	11	+1.5/-0	3.5	±0.5	0.6	Nominal	20/15	Minimum
G4	8	±0.5	15	+2.0/-0	3.5	±0.5	0.6	Nominal	20/15	Minimum
G8	8	±0.5	16	+1.5/-0	3.5	±0.5	0.6	Nominal	20/15	Minimum
Н9	10	±0.5	12.5	+1.5/-0	5	±0.5	0.6	Nominal	20/15	Minimum
H2	10	±0.5	15	+2.0/-0	5	±0.5	0.6	Nominal	20/15	Minimum
Н8	10	±0.5	16	+2.0/-0	5	±0.5	0.6	Nominal	20/15	Minimum
H4	10	±0.5	20	+2.0/-0	5	±0.5	0.6	Nominal	20/15	Minimum
L3	13	±0.5	20	+2.0/-0	5	±0.5	0.6	Nominal	20/15	Minimum
L4	13	±0.5	25	+2.0/-0	5	±0.5	0.6	Nominal	20/15	Minimum
M7	16	±0.5	25	+2.0/-0	7.5	±0.5	0.8	Nominal	20/15	Minimum
M2	16	±0.5	32	+2.0/-0	7.5	±0.5	0.8	Nominal	20/15	Minimum
М3	16	±0.5	36	+2.0/-0	7.5	±0.5	0.8	Nominal	20/15	Minimum
N5	18	±0.5	25	+2.0/-0	7.5	±0.5	0.8	Nominal	20/15	Minimum
N8	18	±0.5	30	+2.0/-0	7.5	±0.5	0.8	Nominal	20/15	Minimum
N1	18	±0.5	32	+2.0/-0	7.5	±0.5	0.8	Nominal	20/15	Minimum
N2	18	±0.5	36	+2.0/-0	7.5	±0.5	0.8	Nominal	20/15	Minimum
N3	18	±0.5	40	+2.0/-0	7.5	±0.5	0.8	Nominal	20/15	Minimum
N7	18	±0.5	45	+2.0/-0	7.5	±0.5	0.8	Nominal	20/15	Minimum



Performance Characteristics

Item	Performance Characteristics						
Capacitance Range	1 – 22,000 µF	0.47 – 470 μF	2.2 – 82 µF				
Capacitance Tolerance	±20% at 120 Hz/20°C						
Rated Voltage	6.3 – 100 VDC	6.3 – 100 VDC 160 – 450 VDC					
Life Test	2,000 hours (see conditions in Test Methods & Performance)						
Operating Temperature	-40°C to +105°C	-25°C to +105°C	-25°C to +105°C				
Leakage Current	$I \le 0.01$ CV (μA) or 3 μA, whichever is greater $I = 0.03$ CV (μA) + 10μ A $I = 0.04$ CV (μA) + 100μ						
	C = rated capacitance (µF), V = rated voltage (VDC). Voltage applied for 2 minutes at 20°C.						

Impedance Z Characteristics at 120 Hz

Rated Voltage (VDC)	6	10	16	25 - 100	160 - 250	350 - 450	400 - 500	400 – 500
Z (-25°C)/Z (20°C)	4	3	2	2	4	4	6	15
Z (-40°C)/Z (20°C)	8	6	4	3	-	-	-	_

Compensation Factor of Ripple Current (RC) vs. Frequency

Rated Voltage (VDC)	Capacitance Range (µF)	120 Hz	300 Hz	1 kHz	10 kHz
6.3 – 100	1.0 – 68 µF	1.00	1.30	1.57	2.00
6.3 – 100	100 – 470 μF	1.00	1.23	1.34	1.50
6.3 – 100	471 – 22,000 µF	1.00	1.10	1.13	1.15
160 – 450	1.0 – 22,000 µF	1.00	1.25	1.40	1.60
500	1.0 – 22,000 µF	1.00	1.05	1.10	1.15



Test Method & Performance

Conditions	Load Life Test	Shelf Life Test				
Temperature	105°C	105°C				
Test Duration	2,000 hours	1,000 hours				
Ripple Current	Maximum ripple current specified at 120 Hz 105°C	No ripple current applied				
Voltage	The sum of DC voltage and the peak AC voltage must not exceed the rated voltage of the capacitor	No voltage applied				
Performance	The following specifications will be satisfi	ed when the capacitor is restored to 20°C:				
Capacitance Change	Within ±20% of the initial value					
Dissipation Factor	Does not exceed 200% of the specified value					
Leakage Current	Does not exceed specified value					

Shelf Life

The capacitance, ESR and impedance of a capacitor will not change significantly after extended storage periods, however the leakage current will very slowly increase.

KEMET's E-series aluminum electrolytic capacitors should not be stored in high temperatures or where there is a high level of humidity. The suitable storage condition for KEMET's E-series aluminum electrolytic capacitors is +5 to +35°C and less than 75% in relative humidity.

KEMET's E-series aluminum electrolytic capacitors should not be stored in damp conditions such as water, saltwater spray or oil spray. KEMET's E-series aluminum electrolytic capacitors should not be stored in an environment full of hazardous gas (hydrogen sulphide, sulphurous acid gas, nitrous acid, chlorine gas, ammonium, etc.)

KEMET's E-series aluminum electrolytic capacitors should not be stored under exposure to ozone, ultraviolet rays or radiation.

If a capacitor has been stored for more than 18 months under these conditions and it shows increased leakage current, then a treatment by voltage application is recommended.

Re-age (Reforming) Procedure

Apply the rated voltage to the capacitor at room temperature for a period of one hour, or until the leakage current has fallen to a steady value below the specified limit. During re-aging a maximum charging current of twice the specified leakage current or 5 mA (whichever is greater) is suggested.



Table 1 – Ratings & Part Number Reference

	VD0 0	Rated	0 0'	DF	RC	LC	
VDC	VDC Surge	Capacitance	Case Size	120 Hz 25°C	120 Hz	20°C 2	Part Number
	Voltage	120 Hz 20°C (μF)	D x L (mm)	(tan δ %)*	105°C (mA)	minutes (µA)	
				,	, ,		
6.3	8	100	5 x 11	26	100	6.3	ESH107M6R3AC3(1)
6.3 6.3	8 8	150 220	5 x 11 6.3 x 11	26 26	120 165	9.5 13.9	ESH157M6R3AC3(1) ESH227M6R3AE3(1)
6.3	8	330	6.3 x 11	26	200	20.8	ESH337M6R3AE3(1)
6.3	8	470	6.3 x 11	26	230	29.6	ESH477M6R3AE3(1)
6.3	8	680	8 x 11	26	350	42.8	ESH687M6R3AG3(1)
6.3	8	1000	8 x 15	26	445	63.0	ESH108M6R3AG4(1)
6.3	8	1000	10 x 12.5	26	470	63.0	ESH108M6R3AH9(1)
6.3 6.3	8 8	1500	10 x 15	26 26	600 800	94.5 138.6	ESH158M6R3AH2(1)
6.3	8	2200 3300	10 x 20 13 x 20	26	1100	207.9	ESH228M6R3AH4(1) ESH338M6R3AL3(1)
6.3	8	4700	13 x 20	26	1180	296.1	ESH478M6R3AL3(1)
6.3	8	6800	16 x 25	26	1490	428.4	ESH688M6R3AM7(1)
6.3	8	10000	16 x 32	26	1830	630.0	ESH109M6R3AM2(1)
6.3	8	15000	16 x 36	26	2090	945.0	ESH159M6R3AM3(1)
6.3	8	22000	18 x 40	26	2350	1386.0	ESH229M6R3AN3(1)
10	13	47	5 x 11	22	75 00	4.7	ESH476M010AC3(1)
10 10	13 13	68 100	5 x 11 5 x 11	22 22	80 110	6.8 10.0	ESH686M010AC3(1) ESH107M010AC3(1)
10	13	150	5 x 11	22	120	15.0	ESH157M010AC3(1)
10	13	220	6.3 x 11	22	180	22.0	ESH227M010AE3(1)
10	13	330	6.3 x 11	22	235	33.0	ESH337M010AE3(1)
10	13	330	8 x 11	22	255	33.0	ESH337M010AG3(1)
10	13	470	6.3 x 11	22	250	47.0	ESH477M010AE3(1)
10 10	13 13	470 680	8 x 11	22	305	47.0	ESH477M010AG3(1)
10	13	680	8 x 11 10 x 12.5	22 22	365 420	68.0 68.0	ESH687M010AG3(1) ESH687M010AH9(1)
10	13	1000	8 x 15	22	480	100.0	ESH108M010AG4(1)
10	13	1000	10 x 12.5	22	540	100.0	ESH108M010AH9(1)
10	13	1500	10 x 20	22	800	150.0	ESH158M010AH4(1)
10	13	2200	10 x 20	22	870	220.0	ESH228M010AH4(1)
10	13	3300	13 x 20	22	1100	330.0	ESH338M010AL3(1)
10 10	13 13	4700 6800	13 x 25 16 x 25	22 22	1380 1700	470.0 680.0	ESH478M010AL4(1) ESH688M010AM7(1)
10	13	10000	16 x 36	22	1950	1000.0	ESH109M010AM3(1)
10	13	15000	18 x 36	22	2180	1500.0	ESH159M010AN2(1)
16	20	33	5 x 11	18	70	5.3	ESH336M016AC3(1)
16	20	47	5 x 11	18	85	7.5	ESH476M016AC3(1)
16	20	68	5 x 11	18	100	10.9	ESH686M016AC3(1)
16	20	100	5 x 11	18	130	16.0	ESH107M016AC3(1)
16 16	20 20	150 220	6.3 x 11 6.3 x 11	18 18	175 220	24.0 35.2	ESH157M016AE3(1) ESH227M016AE3(1)
16	20	330	8 x 11	18	280	52.8	ESH337M016AG3(1)
16	20	470	8 x 11	18	375	75.2	ESH477M016AG3(1)
16	20	680	8 x 15	18	450	108.8	ESH687M016AG4(1)
16	20	680	10 x 12.5	18	480	108.8	ESH687M016AH9(1)
16	20	1000	10 x 15	18	640	160.0	ESH108M016AH2(1)
16 16	20 20	1500 2200	10 x 20 13 x 20	18 18	830 1050	240.0 352.0	ESH158M016AH4(1) ESH228M016AL3(1)
16	20	3300	13 x 25	18	1250	528.0	ESH338M016AL4(1)
16	20	4700	16 x 25	18	1650	752.0	ESH478M016AM7(1)
16	20	6800	16 x 32	18	1900	1088.0	ESH688M016AM2(1)
16	20	10000	18 x 36	18	1900	1600.0	ESH109M016AN2(1)
25	32	22	5 x 11	16	60	5.5	ESH226M025AC3(1)
25	32	33	5 x 11	16	75	8.3	ESH336M025AC3(1)
25 25	32 32	47 68	5 x 11 6.3 x 11	16 16	90 125	11.8 17.0	ESH476M025AC3(1) ESH686M025AE3(1)
25	32	100	6.3 x 11	16	145	25.0	ESH107M025AE3(1)
25	32	150	8 x 11	16	200	37.5	ESH157M025AG3(1)
VDC	VDC Surge	Rated Capacitance	Case Size	DF	RC	LC	Part Number
		-					

⁽¹⁾ Insert packaging code. See Ordering Options Table for available options.

^{*} When capacitance exceeds 1,000 μ F, the DF value (%) is increased by 2% for every additional 1,000 μ F.



Table 1 – Ratings & Part Number Reference cont'd

	VDC Surge	Rated	Case Size	DF	RC	LC	
VDC	Voltage	Capacitance	D x L (mm)	120 Hz 25°C	120 Hz	20°C 2	Part Number
	voitage	120 Hz 20°C (µF)	D X L (IIIIII)	(tan δ %)*	105°C (mA)	minutes (µA)	
25	32	220	8 x 11	16	240	55.0	ESH227M025AG3(1)
25	32	330	8 x 11	16	300	82.5	ESH337M025AG3(1)
25	32	330	10 x 12.5	16	355	82.5	ESH337M025AH9(1)
25 25	32 32	470 470	8 x 15 10 x 12.5	16 16	420 440	117.5 117.5	ESH477M025AG4(1) ESH477M025AH9(1)
25	32	680	10 x 12.5	16	560	170.0	ESH687M025AH2(1)
25	32	1000	10 x 20	16	740	250.0	ESH108M025AH4(1)
25	32	1500	13 x 20	16	920	375.0	ESH158M025AL3(1)
25	32	2200	13 x 25	16	1230	550.0	ESH228M025AL4(1)
25	32	3300	16 x 25	16	1500	825.0	ESH338M025AM7(1)
25	32	4700	16 x 32	16	1800	1175.0	ESH478M025AM2(1)
25 35	32 44	6800 10	18 x 36 5 x 11	16 14	2050 44	1700.0 3.5	ESH688M025AN2(1) ESH106M035AC3(1)
35	44	15	5 x 11	14	50	5.3	ESH156M035AC3(1)
35	44	22	5 x 11	14	65	7.7	ESH226M035AC3(1)
35	44	33	5 x 11	14	85	11.6	ESH336M035AC3(1)
35	44	47	5 x 11	14	100	16.5	ESH476M035AC3(1)
35	44	68	6.3 x 11	14	130	23.8	ESH686M035AE3(1)
35 35	44 44	100 150	6.3 x 11 8 x 11	14 14	170 220	35.0 52.5	ESH107M035AE3(1) ESH157M035AG3(1)
35	44	220	10 x 12.5	14	315	77.0	ESH227M035AH9(1)
35	44	330	10 x 12.5	14	400	115.5	ESH337M035AH9(1)
35	44	470	10 x 15	14	480	164.5	ESH477M035AH2(1)
35	44	680	10 x 20	14	650	238.0	ESH687M035AH4(1)
35	44	1000	13 x 20	14	900	350.0	ESH108M035AL3(1)
35	44	1500	13 x 25	14	1050	525.0	ESH158M035AL4(1)
35 35	44 44	2200 3300	16 x 25 16 x 36	14 14	1370 1680	770.0 1155.0	ESH228M035AM7(1) ESH338M035AM3(1)
35	44	4700	18 x 36	14	1920	1645.0	ESH478M035AN2(1)
50	63	1.0	5 x 11	12	12	3.0	ESH105M050AC3(1)
50	63	2.2	5 x 11	12	18	3.0	ESH225M050AC3(1)
50	63	3.3	5 x 11	12	25	3.0	ESH335M050AC3(1)
50 50	63 63	4.7 6.8	5 x 11 5 x 11	12 12	30 30	3.0 3.4	ESH475M050AC3(1) ESH685M050AC3(1)
50	63	10	5 x 11	12	50	5.0	ESH106M050AC3(1)
50	63	15	5 x 11	12	50	7.5	ESH156M050AC3(1)
50	63	22	5 x 11	12	75	11.0	ESH226M050AC3(1)
50	63	33	5 x 11	12	95	16.5	ESH336M050AC3(1)
50	63	47	6.3 x 11	12	115	23.5	ESH476M050AE3(1)
50 50	63 63	68 100	8 x 11 8 x 11	12 12	159 200	34.0 50.0	ESH686M050AG3(1)
50	63	150	10 x 12.5	12	289	75.0	ESH107M050AG3(1) ESH157M050AH9(1)
50	63	220	10 x 12.5	12	360	110.0	ESH227M050AH3(1)
50	63	220	10 x 15	12	415	110.0	ESH227M050AH2(1)
50	63	330	10 x 20	12	535	165.0	ESH337M050AH4(1)
50	63	470	10 x 20	12	630	235.0	ESH477M050AH4(1)
50 50	63 63	470 680	13 x 20 13 x 20	12 12	730 800	235.0 340.0	ESH477M050AL3(1) ESH687M050AL3(1)
50	63	1000	13 x 20 13 x 25	12	1060	500.0	ESH108M050AL4(1)
50	63	1500	16 x 25	12	1300	750.0	ESH158M050AM7(1)
50	63	2200	16 x 36	12	1600	1100.0	ESH228M050AM3(1)
50	63	3300	18 x 36	12	1780	1650.0	ESH338M050AN2(1)
63 63	79 79	1.0 2.2	5 x 11	10	12 20	3.0	ESH105M063AC3(1)
63	79 79	3.3	5 x 11 5 x 11	10 10	20 27	3.0 3.0	ESH225M063AC3(1) ESH335M063AC3(1)
63	79	4.7	5 x 11	10	34	3.0	ESH475M063AC3(1)
63	79	6.8	5 x 11	10	37	4.3	ESH685M063AC3(1)
63	79	10	5 x 11	10	55	6.3	ESH106M063AC3(1)
63	79	15	5 x 11	10	65	9.5	ESH156M063AC3(1)
VDC	VDC Surge	Rated Capacitance	Case Size	DF	RC	LC	Part Number

 $^{(1) \ \}textit{Insert packaging code}. \ \textit{See Ordering Options Table for available options}.$

^{*} When capacitance exceeds 1,000 μ F, the DF value (%) is increased by 2% for every additional 1,000 μ F.



Table 1 – Ratings & Part Number Reference cont'd

VDC	VDC Surge Voltage	Rated Capacitance 120 Hz 20°C (µF)	Case Size D x L (mm)	DF 120 Hz 25°C (tan δ %)*	RC 120 Hz 105°C (mA)	LC 20°C 2	Part Number
		120 Π2 20 Ο (μΓ)		(tall 0 %)	٠,	minutes (µA)	
63	79	22	6.3 x 11	10	90	13.9	ESH226M063AE3(1)
63	79	33	6.3 x 11	10	100	20.8	ESH336M063AE3(1)
63	79	47	8 x 11	10	155	29.6	ESH476M063AG3(1)
63	79	68	10 x 12.5	10	198	42.8	ESH686M063AH9(1)
63	79	100	10 x 12.5	10	260	63.0	ESH107M063AH9(1)
63	79	150	10 x 15	10	330	94.5	ESH157M063AH2(1)
63	79	220	10 x 20	10	465	138.6	ESH227M063AH4(1)
63	79	330	13 x 20	10	650	207.9	ESH337M063AL3(1)
63	79	470	13 x 20	10	700	296.1	ESH477M063AL3(1)
63	79	680	16 x 25	10	1000	428.4	ESH687M063AM7(1)
63	79	1000	16 x 32	10	1200	630.0	ESH108M063AM2(1)
63	79	1500	16 x 36	10	1450	945.0	ESH158M063AM3(1)
63	79	2200	18 x 36	10	1650	1386.0	ESH228M063AN2(1)
100	125	1.0	5 x 11	10	15	3.0	ESH105M100AC3(1)
100	125	2.2	5 x 11	10	22	3.0	ESH225M100AC3(1)
100	125	3.3	5 x 11	10	29	3.3	ESH335M100AC3(1)
100	125	4.7	5 x 11	10	37	4.7	ESH475M100AC3(1)
100	125	6.8	5 x 11	10	46	6.8	ESH685M100AC3(1)
100	125	10	6.3 x 11	10	65	10.0	ESH106M100AE3(1)
100	125	15	6.3 x 11	10	75	15.0	ESH156M100AE3(1)
100	125	22	8 x 11	10	115	22.0	ESH226M100AG3(1)
100	125	33	8 x 11	10	140	33.0	ESH336M100AG3(1)
100	125	47	10 x 12.5	10	185	47.0	ESH476M100AH9(1)
100	125	68	10 x 15	10	240	68.0	ESH686M100AH2(1)
100	125	100	10 x 20	10	305	100.0	ESH107M100AH4(1)
100	125	150	13 x 20	10	370	150.0	ESH157M100AL3(1)
100	125	220	13 x 25	10	520	220.0	ESH227M100AL4(1)
100	125	330	16 x 25	10	720	330.0	ESH337M100AM7(1)
100	125	470	16 x 32	10	875	470.0	ESH477M100AM2(1)
100	125	680	16 x 36	10	1200	680.0	ESH687M100AM3(1)
160	200	1.0	5 x 11	15	17	14.8	ESH105M160AC3(1)
160	200	2.2	6.3 x 11	15	25	20.6	ESH225M160AE3(1)
160	200	3.3	6.3 x 11	15	36	25.8	ESH335M160AE3(1)
160	200	4.7	6.3 x 11	15	43	32.6	ESH475M160AE3(1)
160	200	6.8	8 x 11	15	54	42.6	ESH685M160AG3(1)
160	200	10	8 x 11	15	70	58.0	ESH106M160AG3(1)
160	200	15	10 x 12.5	15	90	82.0	ESH156M160AH9(1)
160	200	22	10 x 15	15	115	115.6	ESH226M160AH2(1)
160	200	33	10 x 20	15	160	168.4	ESH336M160AH4(1)
160	200	47	10 x 20	15	195	235.6	ESH476M160AH4(1)
160	200	68	13 x 20	15	255	336.4	ESH686M160AL3(1)
160	200	100	13 x 25	15	350	490.0	ESH107M160AL4(1)
160	200	150	16 x 25	15	435	730.0	ESH157M160AM7(1)
160	200	220	16 x 32	15	550	1066.0	ESH227M160AM2(1)
160	200	330	18 x 36	15	800	1594.0	ESH337M160AN2(1)
160	200	470	18 x 40	15	900	2266.0	ESH477M160AN3(1)
200	250	1.0	6.3 x 11	15	17	16.0	ESH105M200AE3(1)
200	250	2.2	6.3 x 11	15	25	23.2	ESH225M200AE3(1)
200	250	3.3	6.3 x 11	15	36	29.8	ESH335M200AE3(1)
200	250	4.7	8 x 11	15	50	38.2	ESH475M200AG3(1)
200	250	6.8	8 x 11	15	60	50.8	ESH685M200AG3(1)
200	250	10	10 x 12.5	15	80	70.0	ESH106M200AH9(1)
200	250	15	10 x 15	15	110	100.0	ESH156M200AH2(1)
200	250	22	10 x 20	15	140	142.0	ESH226M200AH4(1)
200	250	33	13 x 20	15	200	208.0	ESH336M200AL3(1)
200	250	47	13 x 20	15	220	292.0	ESH476M200AL3(1)
200	250	68	13 x 25	15	280	418.0	ESH686M200AL4(1)
200	250	100	16 x 25	15	350	610.0	ESH107M200AM7(1)
200	250	150	16 x 32	15	480	910.0	ESH157M200AM2(1)
VDC	VDC Surge	Rated Capacitance	Case Size	DF	RC	LC	Part Number

⁽¹⁾ Insert packaging code. See Ordering Options Table for available options.

^{*} When capacitance exceeds 1,000 μ F, the DF value (%) is increased by 2% for every additional 1,000 μ F.



Table 1 – Ratings & Part Number Reference cont'd

		Rated		DF	RC	LC	
VDC	VDC Surge	Capacitance	Case Size	120 Hz 25°C	120 Hz	20°C 2	Part Number
VDC	Voltage		D x L (mm)				Fait Nullibei
		120 Hz 20°C (μF)	, ,	(tan δ %)*	105°C (mA)	minutes (µA)	
200	250	220	16 x 36	15	675	1330.0	ESH227M200AM3(1)
200	250	220	18 x 32	15	685	1330.0	ESH227M200AN1(1)
200	250	330	18 x 36	15	750	1990.0	ESH337M200AN2(1)
250 250	300 300	1.0 2.2	6.3 x 11 6.3 x 11	15 15	17 29	17.5 26.5	ESH105M250AE3(1) ESH225M250AE3(1)
250	300	3.3	8 x 11	15	42	34.8	ESH335M250AE3(1)
250	300	4.7	8 x 11	15	52	45.3	ESH475M250AG3(1)
250	300	6.8	8 x 11	15	62	61.0	ESH685M250AG3(1)
250	300	10	10 x 12.5	15	80	85.0	ESH106M250AH9(1)
250	300	15	10 x 15	15	110	122.5	ESH156M250AH2(1)
250	300	22	10 x 20	15	140	175.0	ESH226M250AH4(1)
250	300	33	13 x 20	15	200	257.5	ESH336M250AL3(1)
250 250	300 300	47 68	13 x 25 13 x 25	15 15	240 290	362.5 520.0	ESH476M250AL4(1) ESH686M250AL4(1)
250	300	100	16 x 25	15	380	760.0	ESH107M250AM7(1)
250	300	150	16 x 32	15	420	1135.0	ESH157M250AM2(1)
250	300	220	18 x 36	15	680	1660.0	ESH227M250AN2(1)
350	400	1.0	6.3 x 11	20	16	20.5	ESH105M350AE3(1)
350	400	2.2	8 x 11	20	31	33.1	ESH225M350AG3(1)
350	400	3.3	8 x 11	20	35	44.7	ESH335M350AG3(1)
350	400	4.7	8 x 11	20	45	59.4	ESH475M350AG3(1)
350	400	10	10 x 15	20	80	115.0	ESH106M350AH2(1)
350 350	400 400	22 33	13 x 20 13 x 25	20 20	150 200	241.0 356.5	ESH226M350AL3(1) ESH336M350AL4(1)
350	400	47	16 x 25	20	260	503.5	ESH476M350AL4(1)
350	400	100	18 x 32	20	400	1060.0	ESH107M350AN1(1)
400	450	1.0	6.3 x 11	20	17	22.0	ESH105M400AE3(1)
400	450	2.2	8 x 11	20	31	36.4	ESH225M400AG3(1)
400	450	3.3	8 x 11	20	35	49.6	ESH335M400AG3(1)
400	450	4.7	8 x 11	20	45	66.4	ESH475M400AG3(1)
400	450	4.7	10 x 12.5	20	55	66.4	ESH475M400AH9(1)
400 400	450 450	6.8	8 x 15 10 x 12.5	20 20	60 65	91.6 91.6	ESH685M400AG4(1)
400	450	6.8 10	10 x 12.5	20	80	130.0	ESH685M400AH9(1) ESH106M400AH2(1)
400	450	15	10 x 10	20	100	190.0	ESH156M400AH4(1)
400	450	22	13 x 20	20	140	274.0	ESH226M400AL3(1)
400	450	33	13 x 25	20	200	406.0	ESH336M400AL4(1)
400	450	47	16 x 25	20	265	574.0	ESH476M400AM7(1)
400	450	68	16 x 32	20	410	826.0	ESH686M400AM2(1)
400	450	68	18 x 25	20	390	826.0	ESH686M400AN5(1)
400	450	100	18 x 32	20	500	1210.0	ESH107M400AN1(1)
400 400	450 450	120 120	18 x 32 18 x 36	20 20	520 550	1450.0 1450.0	ESH127M400AN1(1) ESH127M400AN2(1)
400	450	150	18 x 40	20	620	1810.0	ESH157M400AN3(1)
420	470	1.0	6.3 x 11	20	17	22.6	ESH105M420AE3(1)
420	470	2.2	8 x 11	20	29	37.7	ESH225M420AG3(1)
420	470	3.3	8 x 11	20	34	51.6	ESH335M420AG3(1)
420	470	4.7	10 x 12.5	20	55	69.2	ESH475M420AH9(1)
420	470	6.8	10 x 15	20	68	95.7	ESH685M420AH2(1)
420	470	10	10 x 20	20	98	136.0	ESH106M420AH4(1)
420 420	470 470	15 22	13 x 20 13 x 25	20 20	130 155	199.0 287.2	ESH156M420AL3(1) ESH226M420AL4(1)
420 420	470 470	33	16 x 25	20 20	205	425.8	ESH226M420AL4(1) ESH336M420AM7(1)
420	470	47	16 x 25	20	235	602.2	ESH476M420AM7(1)
420	470	68	16 x 32	20	400	866.8	ESH686M420AM2(1)
420	470	68	18 x 25	20	380	866.8	ESH686M420AN5(1)
420	470	100	18 x 36	20	490	1270.0	ESH107M420AN2(1)
420	470	120	18 x 40	20	430	1522.0	ESH127M420AN3(1)
420	470	150	18 x 45	20	570	1900.0	ESH157M420AN7(1)
VDC	VDC Surge	Rated Capacitance	Case Size	DF	RC	LC	Part Number

⁽¹⁾ Insert packaging code. See Ordering Options Table for available options.

^{*} When capacitance exceeds 1,000 μ F, the DF value (%) is increased by 2% for every additional 1,000 μ F.



Table 1 – Ratings & Part Number Reference cont'd

VDC	VDC Surge Voltage	Rated Capacitance 120 Hz 20°C (µF)	Case Size D x L (mm)	DF 120 Hz 25°C (tan δ %)*	RC 120 Hz 105°C (mA)	LC 20°C 2 minutes (µA)	Part Number
450	500	1.0	6.3 x 11	20	18	23.5	ESH105M450AE3(1)
450	500	1.0	8 x 11	20	22	23.5	ESH105M450AG3(1)
450	500	2.2	8 x 11	20	30	39.7	ESH225M450AG3(1)
450	500	2.2	10 x 12.5	20	37	39.7	ESH225M450AH9(1)
450	500	3.3	8 x 15	20	42	54.6	ESH335M450AG4(1)
450	500	3.3	10 x 12.5	20	40	54.6	ESH335M450AH9(1)
450	500	4.7	10 x 12.5	20	52	73.5	ESH475M450AH9(1)
450	500	6.8	10 x 15	20	62	101.8	ESH685M450AH2(1)
450	500	10	10 x 20	20	85	145.0	ESH106M450AH4(1)
450	500	15	13 x 20	20	120	212.5	ESH156M450AL3(1)
450	500	22	13 x 25	20	150	307.0	ESH226M450AL4(1)
450	500	33	16 x 25	20	210	455.5	ESH336M450AM7(1)
450	500	47	16 x 25	20	260	644.5	ESH476M450AM7(1)
450	500	68	18 x 32	20	370	928.0	ESH686M450AN1(1)
450	500	100	18 x 36	20	495	1360.0	ESH107M450AN2(1)
450	500	120	18 x 40	20	565	1630.0	ESH127M450AN3(1)
450	500	150	18 x 45	20	650	2035.0	ESH157M450AN7(1)
500	550	2.2	8 x 11	25	25	144.0	ESH225M500AG3(1)
500	550	3.3	8 x 16	25	30	166.0	ESH335M500AG8(1)
500	550	4.7	8 x 16	25	34	194.0	ESH475M500AG8(1)
500	550	4.7	10 x 12.5	25	38	194.0	ESH475M500AH9(1)
500	550	6.8	10 x 16	25	50	236.0	ESH685M500AH8(1)
500	550	8.2	10 x 20	25	65	264.0	ESH825M500AH4(1)
500	550	10	10 x 20	25	70	300.0	ESH106M500AH4(1)
500	550	10	13 x 20	25	85	300.0	ESH106M500AL3(1)
500	550	15	13 x 25	25	100	400.0	ESH156M500AL4(1)
500	550	22	13 x 25	25	115	540.0	ESH226M500AL4(1)
500	550	22	16 x 25	25	130	540.0	ESH226M500AM7(1)
500	550	33	18 x 25	25	180	760.0	ESH336M500AN5(1)
500	550	47	16 x 32	25	180	1040.0	ESH476M500AM2(1)
500	550	47	18 x 30	25	230	1040.0	ESH476M500AN8(1)
500	550	68	18 x 32	25	250	1460.0	ESH686M500AN1(1)
500	550	68	18 x 36	25	290	1460.0	ESH686M500AN2(1)
500	550	82	18 x 40	25	335	1740.0	ESH826M500AN3(1)
VDC	VDC Surge	Rated Capacitance	Case Size	DF	RC	LC	Part Number

⁽¹⁾ Insert packaging code. See Ordering Options Table for available options.

^{*} When capacitance exceeds 1,000 μ F, the DF value (%) is increased by 2% for every additional 1,000 μ F.



Mounting Positions (Safety Vent)

In operation, electrolytic capacitors will always conduct a leakage current which causes electrolysis. The oxygen produced by electrolysis will regenerate the dielectric layer but, at the same time, the hydrogen released may cause the internal pressure of the capacitor to increase. The overpressure vent (safety vent) ensures that the gas can escape when the pressure reaches a certain value. All mounting positions must allow the safety vent to work properly.

Installing

- A general principle is that lower-use temperatures result in a longer, useful life of the capacitor. For this reason, it should be
 ensured that electrolytic capacitors are placed away from heat-emitting components. Adequate space should be allowed between
 components for cooling air to circulate, particularly when high ripple current loads are applied. In any case, the maximum category
 temperature must not be exceeded.
- Do not deform the case of capacitors or use capacitors with a deformed case.
- Verify that the connections of the capacitors are able to insert on the board without excessive mechanical force.
- If the capacitors require mounting through additional means, the recommended mounting accessories shall be used.
- · Verify the correct polarization of the capacitor on the board.
- Verify that the space around the pressure relief device is according to the following guideline:

Case Diameter	Space Around Safety Vent
≤ 16 mm	> 2 mm
> 16 to ≤ 40 mm	> 3 mm
> 40 mm	> 5 mm

It is recommended that capacitors always be mounted with the safety device uppermost or in the upper part of the capacitor.

- If the capacitors are stored for a long time, the leakage current must be verified. If the leakage current is superior to the value listed in this catalog, the capacitors must be reformed. In this case, they can be reformed by application of the rated voltage through a series resistor approximately 1 k Ω for capacitors with $V_R \le 160 \text{ V}$ (5 W resistor) and 10 k Ω for the other rated voltages.
- In the case of capacitors connected in series, a suitable voltage sharing must be used.
 In the case of balancing resistors, the approximate resistance value can be calculated as: R = 60/C

KEMET recommends, nevertheless, to ensure that the voltage across each capacitor does not exceed its rated voltage.



Application and Operation Guidelines

Electrical Ratings: Capacitance (ESC)




Simplified equivalent circuit diagram of an electrolytic capacitor

The capacitive component of the equivalent series circuit (Equivalent Series Capacitance ESC) is determined by applying an alternate voltage of ≤ 0.5 V at a frequency of 120 or 100 Hz and 20°C (IEC 384-1, 384-4).

Temperature Dependence of the Capacitance


Capacitance of an electrolytic capacitor depends upon temperature: with decreasing temperature the viscosity of the electrolyte increases, thereby reducing its conductivity. Capacitance will decrease if temperature decreases. Furthermore, temperature drifts cause armature dilatation and, therefore, capacitance changes (up to 20% depending on the series considered, from 0 to 80°C). This phenomenon is more evident for electrolytic capacitors than for other types.

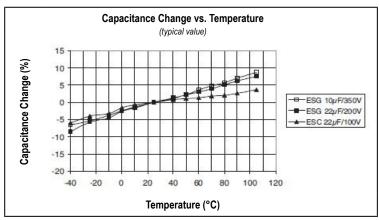

Frequency Dependence of the Capacitance

Effective capacitance value is derived from the impedance curve, as long as impedance is still in the range where the capacitance component is dominant.


$$C = \frac{1}{2\pi \text{ fZ}} \frac{C = \text{Capacitance (F)}}{\text{f = Frequency (Hz)}}$$
$$Z = \text{Impedance } (\Omega)$$

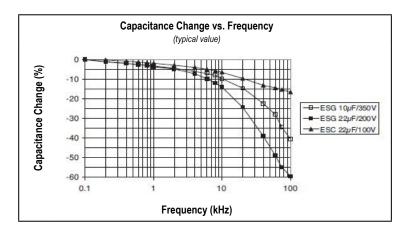



Dissipation Factor tan δ (DF)


Dissipation Factor $\tan \delta$ is the ratio between the active and reactive power for a sinusoidal waveform voltage. It can be thought of as a measurement of the gap between an actual and ideal capacitor.




Tan δ is measured with the same set-up used for the series capacitance ESC. tan δ = ω x ESC x ESR where:

ESC = Equivalent Series Capacitance

ESR = Equivalent Series Resistance

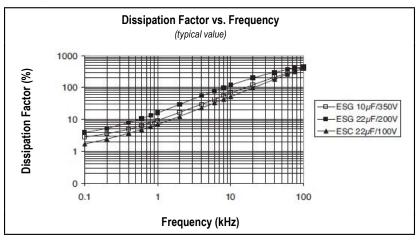

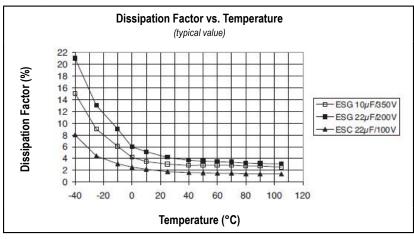




Equivalent Series Inductance (ESL)

Equivalent Series Inductance or Self Inductance results from the terminal configuration and internal design of the capacitor.

Capacitor Equivalent Internal Circuit



Equivalent Series Resistance (ESR)


Equivalent Series Resistance is the resistive component of the equivalent series circuit. ESR value depends on frequency and temperature and is related to the tan δ by the following equation:


ESR = Equivalent Series Resistance (
$$\Omega$$
)

$$ESR = \frac{\tan \delta}{2\pi f \, ESC} \quad \begin{array}{l} \tan \delta = \text{Dissipation Factor} \\ ESC = \text{Equivalent Series Capacitance (F)} \end{array}$$

f = Frequency (Hz)

Tolerance limits of the rated capacitance must be taken into account when calculating this value.

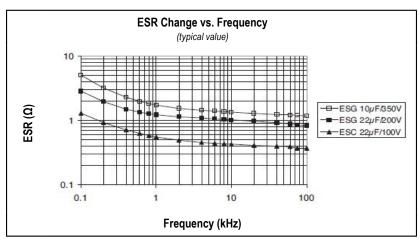


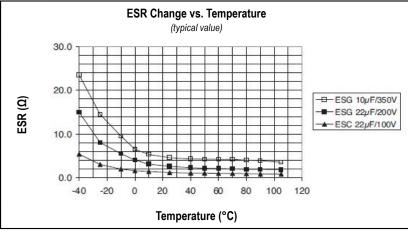



Impedance (Z)

Impedance of an electrolytic capacitor results from a circuit formed by the following individual equivalent series components:



C_o = Aluminum oxide capacitance (surface and thickness of the dielectric)


R_e = Resistance of electrolyte and paper mixture (other resistances not depending on the frequency are not considered: tabs, plates, etc.)

C_a = Electrolyte soaked paper capacitance

L = Inductive reactance of the capacitor winding and terminals

Impedance of an electrolytic capacitor is not a constant quantity that retains its value under all conditions; it changes depending on frequency and temperature.

Impedance as a function of frequency (sinusoidal waveform) for a certain temperature can be represented as follows:

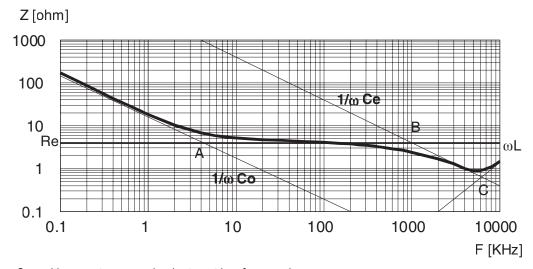


- Capacitive reactance predominates at low frequencies
- With increasing frequency, capacitive reactance $Xc = 1/\omega C_o$ decreases until it reaches the order of magnitude of electrolyte resistance $R_o(A)$
- At even higher frequencies, resistance of the electrolyte predominates: Z = R_a (A B)
- When the capacitor's resonance frequency is reached (ω_0), capacitive and inductive reactance mutually cancel each other $1/\omega C_e = \omega L$, $\omega_0 = C\sqrt{1/LCe}$
- Above this frequency, inductive reactance of the winding and its terminals (XL = Z = ωL) becomes effective and leads to an increase
 in impedance

Generally speaking, it can be estimated that $C_e \approx 0.01 C_o$.



Impedance (Z) cont'd

Impedance as a function of frequency (sinusoidal waveform) for different temperature values can be represented as follows (typical values):

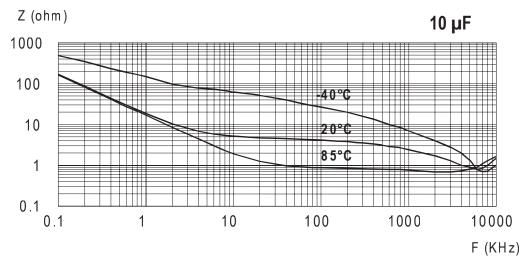

R_e is the most temperature-dependent component of an electrolytic capacitor equivalent circuit. Electrolyte resistivity will decrease if temperature rises.

In order to obtain a low impedance value throughout the temperature range, R_e must be as little as possible. However, R_e values that are too low indicate a very aggressive electrolyte, resulting in a shorter life of the electrolytic capacitor at high temperatures. A compromise must be reached.

Leakage Current (LC)

Due to the aluminum oxide layer that serves as a dielectric, a small current will continue to flow even after a DC voltage has been applied for long periods. This current is called leakage current.

A high leakage current flows after applying voltage to the capacitor then decreases in a few minutes, e.g., after prolonged storage without any applied voltage. In the course of continuous operation, the leakage current will decrease and reach an almost constant value.

After a voltage-free storage the oxide layer may deteriorate, especially at high temperature. Since there are no leakage currents to transport oxygen ions to the anode, the oxide layer is not regenerated. The result is that a higher than normal leakage current will flow when voltage is applied after prolonged storage.



Leakage Current (LC) cont'd

As the oxide layer is regenerated in use, the leakage current will gradually decrease to its normal level.

The relationship between the leakage current and voltage applied at constant temperature can be shown schematically as follows:



V_r = Forming voltage

If this level is exceeded, a large quantity of heat and gas will be generated and the capacitor could be damaged.


V_D = Rated Voltage

This level represents the top of the linear part of the curve.

V_s = Surge voltage

This lies between V_p and V_r . The capacitor can be subjected to V_s for short periods only.

Electrolytic capacitors are subjected to a reforming process before acceptance testing. The purpose of this preconditioning is to ensure that the same initial conditions are maintained when comparing different products.



The maximum ripple current value depends on:

- Ambient temperature
- Surface area of the capacitor (heat dissipation area)

tan δ or ESR

Frequency

The capacitor's life depends on the thermal stress.

Frequency Dependence of the Ripple Current

ESR and, thus, the tan δ depend on the frequency of the applied voltage. This indicates that the allowed ripple current is also a function of the frequency.

Temperature Dependence of the Ripple Current

The data sheet specifies maximum ripple current at the upper category temperature for each capacitor.

Expected Life Calculation

Expected life depends on operating temperature according to the following formula: $L = Lo \times 2^{(To-T)/10}$


Where:


L: Expected life

Lo: Load life at maximum permissible operating temperature

T: Actual operating temperature

To: Maximum permissible operating temperature This formula is applicable between 40°C and To.



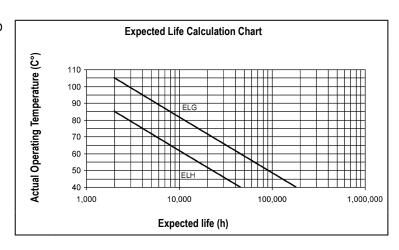




Packaging Quantities


Size	Diameter	Longth	Bulk	Auto-insertion					
Code	(mm)	Length (mm)	Standard Leads	Cut Leads	Ammo	Tape & Reel			
C3	5	11	10000	15000	2000	2600			
E3	6.3	11	10000	15000	2000	2200			
G3	8	11	6000	8000	1000	1500			
G4	8	15	5000	5000	1000	1500			
G8	8	16	5000	5000	1000	1500			
Н9	10	12.5	4000	4000	700	1200			
H2	10	15	3000	4000	700	1200			
Н8	10	16	3000	4000	700	1200			
H4	10	20	2400	3000	700	1200			
L3	13	20	2000	2000	500				
L4	13	25	1600	1600	500				
M7	16	25	1000	500	300				
M2	16	32	800	500	300				
М3	16	36	600	500	300				
N5	18	25	800	500	300				
N8	18	30	800	500					
N1	18	32	500	500					
N2	18	36	500	500					
N3	18	40	500	500					
N7	18	45	500	500					



Construction

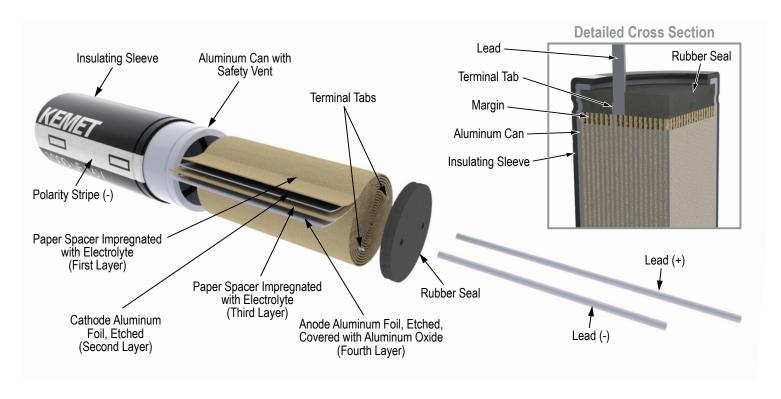

Marking

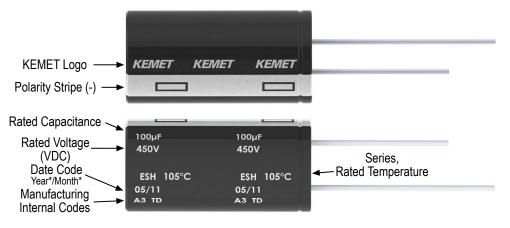

- KEMET logo
- Series
- Operating temperature (°C)
- Rated capacitance (µF)
- Rated voltage (VDC)
- · Negative polarity: white line
- Date code

*Y = Year


Code	01	02	03	04	05	06	07	08	09
Year	2011	2012	2013	2014	2015	2016	2017	2018	2019

*M = Month

	THE THE STATE OF T													
Code	01	02	03	04	05	06	07	08	09	10	11	12		
Month	1	2	3	4	5	6	7	8	9	10	11	12		



Taping for Automatic Insertion Machines

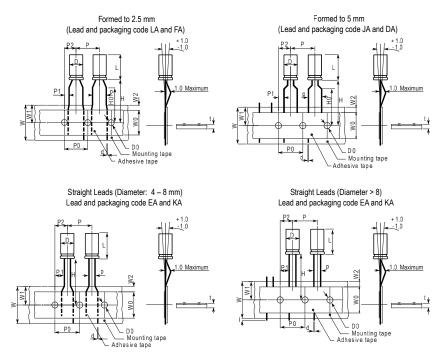



Dimensions (mm)	D	L	р	d	Р	P0	P1	P2	W	W0	W1	W2	НО	H1	ı	D0	t
Tolerance	+0.5		+0.8/-0.2	±0.05	±1.0	±0.3	±0 .7	±1.3	+1/-0.5	±0.5	Maximum	Maximum	±0.75	±0.5	Maximum	±0.2	±0.2
	4	5-7	2.5	0.45	12.7	12.7	5.1	6.35	18	12	11	3	16	18.5		4	0.7
Formed to 2.5 mm	5	≤7	2.5	0.45	12.7	12.7	5.1	6.35	18	12	11	3	16	18.5		4	0.7
	5	>7	2.5	0.5	12.7	12.7	5.1	6.35	18	12	11	3	16	18.5		4	0.7
	4	5-7	5	0.45	12.7	12.7	3.85	6.35	18	12	11	3	16	18.5		4	0.7
	_	≤7	5	0.45	12.7	12.7	3.85	6.35	18	12	11	3	16	18.5		4	0.7
	5	>7	5	0.5	12.7	12.7	3.85	6.35	18	12	11	3	16	18.5		4	0.7
Formed to 5 mm	6	≤7	5	0.5	12.7	12.7	3.85	6.35	18	12	11	3	16	18.5		4	0.7
	0	>7	5	0.5	12.7	12.7	3.85	6.35	18	12	11	3	16	18.5		4	0.7
	8	≤7	5	0.5	12.7	12.7	3.85	6.35	18	12	11	3	16	18.5		4	0.7
	0	>7	5	0.5	12.7	12.7	3.85	6.35	18	12	11	3	16	18.5		4	0.7
	4	5-7	1.5	0.45	12.7	12.7	5.6	6.35	18	12	11	3	18.5			4	0.7
	5	≤7	2	0.45	12.7	12.7	5.35	6.35	18	12	11	3	18.5			4	0.7
	5	>7	2	0.5	12.7	12.7	5.35	6.35	18	12	11	3	18.5			4	0.7
	6	≤7	2.5	0.5	12.7	12.7	5.1	6.35	18	12	11	3	18.5			4	0.7
	0	>7	2.5	0.5	12.7	12.7	5.1	6.35	18	12	11	3	18.5			4	0.7
	8	≤7	3.5	0.5	12.7	12.7	4.6	6.35	18	12	11	3	18.5			4	0.7
Straight leads	0	>7	3.5	0.5	12.7	12.7	4.6	6.35	18	12	11	3	18.5			4	0.7
	10	12-25	5	0.6	12.7	12.7	3.85	6.35	18	12	11	3	18.5		1	4	1
	12		5	0.6	15	15	3.85	7.5	18	12	11	3	18.5		1	4	1
	13		5	0.6	15	15	3.85	7.5	18	12	11	3	18.5		1	4	1
	13	15-25	5	0.6	15	15	3.85	7.5	18	12	11	3	18.5		1	4	1
	16		7.5	0.8	30	30	3.75	7.5	18	12	11	3	18.5		1	4	1
	18		7.5	0.8	30	30	3.75	7.5	18	12	11	3	18.5		1	4	1



Lead Taping & Packaging







		Ammo		Reel					
Case Size (mm)	Н	W	T	D	Н	W			
		Maximum	Maximum	±2	±0.5	+1/-0.1			
4	230	340	42						
5 x 5 – 7	230	340	42						
6.3 x 5 – 7	275	340	42						
8 x 5 – 9	235	340	45						
5 x 11	230	340	48						
6.3 x 11	270	340	48						
8 x 11	235	340	48	250	20	F0			
8 x 14 – 20	240	340	57	350	30	50			
10 x 12	250	340	52						
10 x 15 – 19	256	340	57						
10 x 22 – 25	250	340	60						
12	270	340	57						
13	285	340	62						
16	265	340	62						



Construction Data

The manufacturing process begins with the anode foil being electrochemically etched to increase the surface area and then "formed" to produce the aluminum oxide layer. Both the anode and cathode foils are then interleaved with absorbent paper and wound into a cylinder. During the winding process, aluminum tabs are attached to each foil to provide the electrical contact.

The deck, complete with terminals, is attached to the tabs and then folded down to rest on top of the winding. The complete winding is impregnated with electrolyte before being housed in a suitable container, usually an aluminum can, and sealed. Throughout the process, all materials inside the housing must be maintained at the highest purity and be compatible with the electrolyte.

Each capacitor is aged and tested before being sleeved and packed. The purpose of aging is to repair any damage in the oxide layer and thus reduce the leakage current to a very low level. Aging is normally carried out at the rated temperature of the capacitor and is accomplished by applying voltage to the device while carefully controlling the supply current. The process may take several hours to complete.

Damage to the oxide layer can occur due to variety of reasons:

- Slitting of the anode foil after forming
- · Attaching the tabs to the anode foil
- Minor mechanical damage caused during winding

A sample from each batch is taken by the quality department after completion of the production process. This sample size is controlled by the use of recognized sampling tables defined in BS 6001.


The following tests are applied and may be varied at the request of the customer. In this case the batch, or special procedure, will determine the course of action.


Electrical:

- Leakage current
- Capacitance
- ESR
- Impedance
- Tan Delta

Mechanical/Visual:

- Overall dimensions
- Torque test of mounting stud
- Print detail
- Box labels
- Packaging, including packed quantity



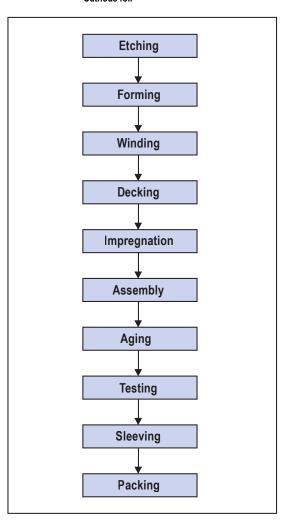



KEMET Corporation World Headquarters

2835 KEMET Way Simpsonville, SC 29681

Mailing Address: P.O. Box 5928 Greenville, SC 29606

www.kemet.com Tel: 864-963-6300 Fax: 864-963-6521

Corporate Offices Fort Lauderdale, FL Tel: 954-766-2800

North America

Northeast

Wilmington, MA Tel: 978-658-1663

Southeast

Lake Mary, FL Tel: 407-855-8886

Central

Novi, MI

Tel: 248-994-1030

Irving, TX

Tel: 972-915-6041

West

Milpitas, CA Tel: 408-433-9950

Mexico

Guadalajara, Jalisco Tel: 52-33-3123-2141

Europe

Southern Europe Sasso Marconi, Italy Tel: 39-051-939111

Skopje, Macedonia Tel: 389-2-55-14-623

Central Europe Landsberg, Germany Tel: 49-8191-3350800

Kamen, Germany Tel: 49-2307-438110

Northern Europe

Wyboston, United Kingdom Tel: 44-1480-273082

Espoo, Finland Tel: 358-9-5406-5000

Asia

Northeast Asia Hong Kong Tel: 852-2305-1168

Shenzhen, China Tel: 86-755-2518-1306

Beijing, China Tel: 86-10-5877-1075

Shanghai, China Tel: 86-21-6447-0707

Seoul, South Korea Tel: 82-2-6294-0550

Taipei, Taiwan Tel: 886-2-27528585

Southeast Asia

Singapore

Tel: 65-6701-8033

Penang, Malaysia Tel: 60-4-6430200

Bangalore, India Tel: 91-806-53-76817

Note: KEMET reserves the right to modify minor details of internal and external construction at any time in the interest of product improvement. KEMET does not assume any responsibility for infringement that might result from the use of KEMET Capacitors in potential circuit designs. KEMET is a registered trademark of KEMET Electronics Corporation.



Disclaimer

All product specifications, statements, information and data (collectively, the "Information") in this datasheet are subject to change. The customer is responsible for checking and verifying the extent to which the Information contained in this publication is applicable to an order at the time the order is placed.

All Information given herein is believed to be accurate and reliable, but it is presented without guarantee, warranty, or responsibility of any kind, expressed or implied.

Statements of suitability for certain applications are based on KEMET Electronics Corporation's ("KEMET") knowledge of typical operating conditions for such applications, but are not intended to constitute – and KEMET specifically disclaims – any warranty concerning suitability for a specific customer application or use. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by KEMET with reference to the use of KEMET's products is given gratis, and KEMET assumes no obligation or liability for the advice given or results obtained.

Although KEMET designs and manufactures its products to the most stringent quality and safety standards, given the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage.

Although all product—related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicted or that other measures may not be required.