3.2 x 1.6 x 1.2mm

MSL = 3

RoHS/RoHS II Compliant

(Pb)

ACAG0301-24505500-T

FEATURES

- Dual band chip antenna
- Gain of 2.23dBi | 4.05dBi
- Made using LTCC (low temperature co-fired ceramic) technology
- Small form factor 3.2 x 1.6 x 1.2mm
- Omni-directional

APPLICATIONS


- IoT and wearable
- WiFi
- Bluetooth
- ISM applications

ELECTRICAL CHARACTERISTICS

Item	Specification		
Frequency Range	2400 MHz~2500 MHz	5150 MHz~5850 MHz	
Frequency After Matching	2450 MHz	5500 MHz	
Bandwidth	100 MHz (typ.)	800 MHz (typ.)	
Return Loss	-7 dB (max.)	-7 dB (max.)	
Gain	2.23 dBi	4.05 dBi	
Impedance	50 Ω		
Azimuth	Omni-directional		
Operating Temperature range	-40°C ~+ 85°C		


MECHANICAL DIMENSIONS (mm)

Antenna Dimension

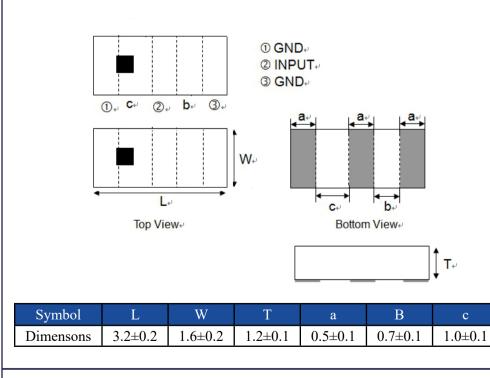

ABRACON

Layout Dimension

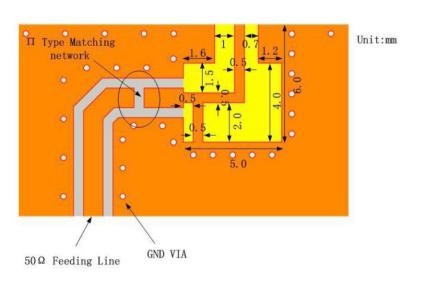


5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com REVISED: 12.21.2020

ACAG0301-24505500-T

3.2 x 1.6 x 1.2mm RoHS/RoHS II Compliant MSL = 3

EVALUATION BOARD AND MATCHING CIRCUITS

ANTENNA RESPONSE – SMITH CHART AND RETURN LOSS S11

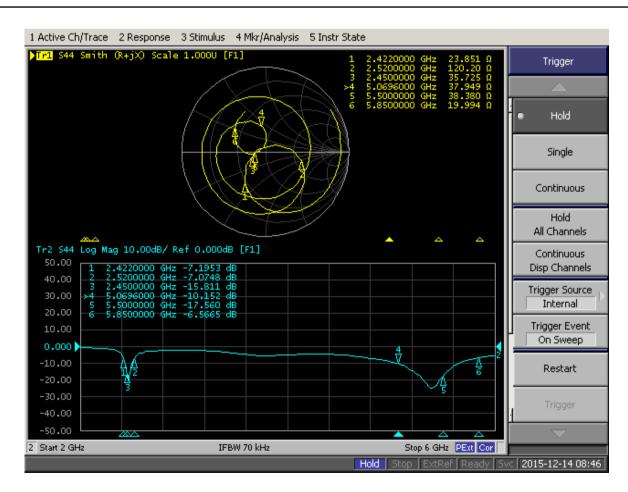




5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

REVISED: 12.21.2020

ACAG0301-24505500-T




RADIATION PATTERNS

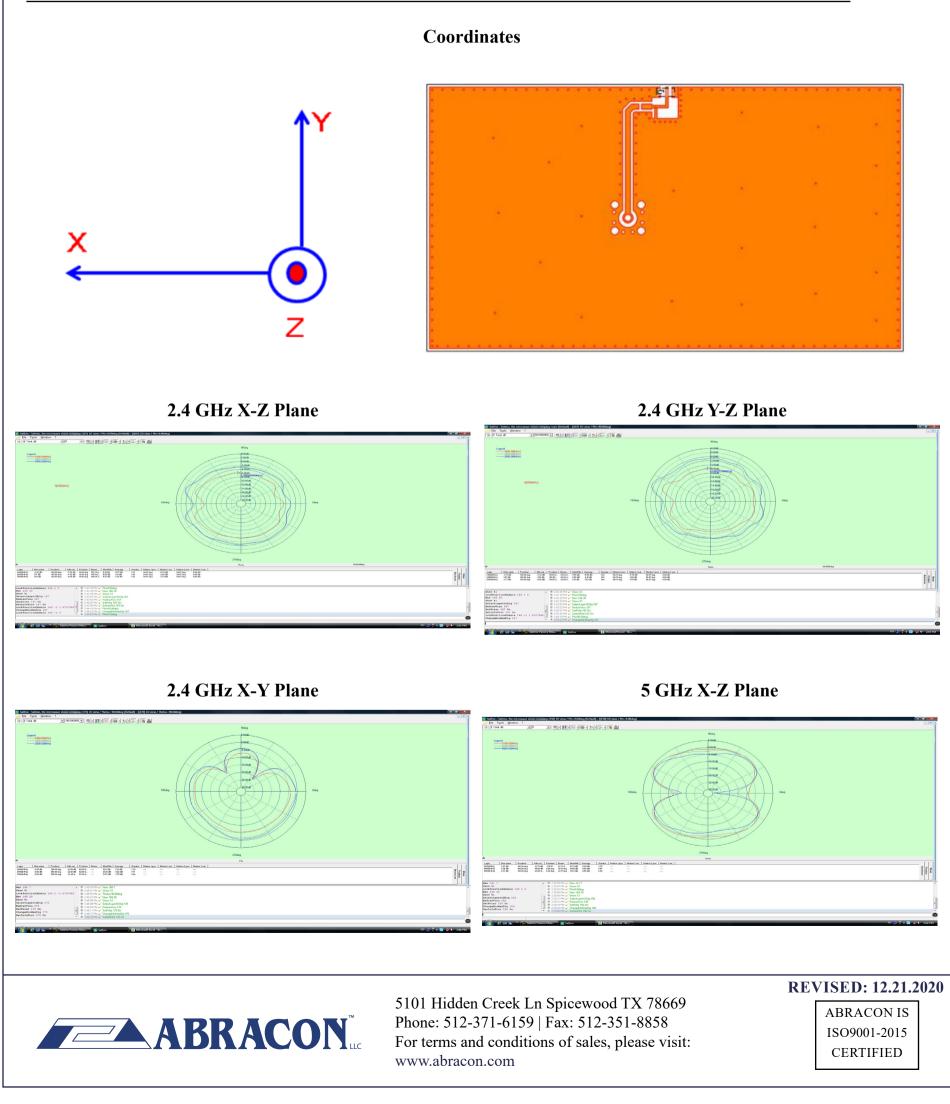


ACAG0301-24505500-T


RADIATION PATTERNS

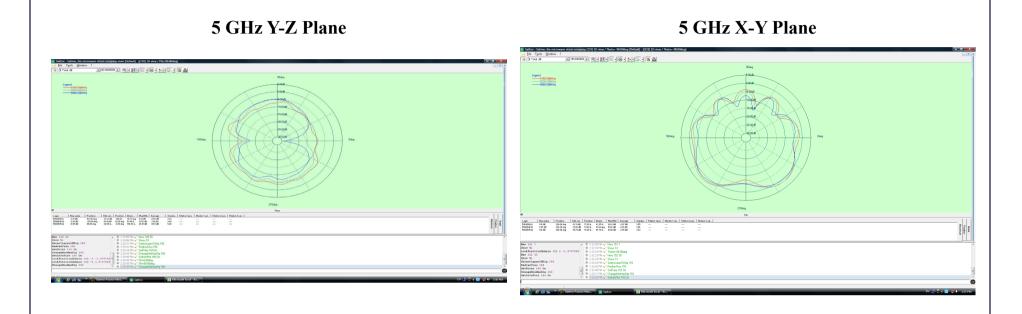

3D RADIATION PATTERNS

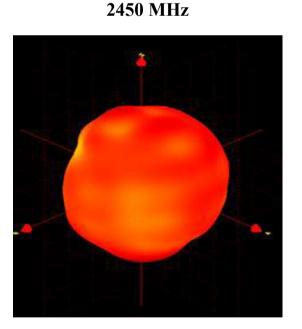

Frequency (MHz)	2400	2450	2500
Avg. Gain (dBi)	-4.75	-1.61	-1.36
Peak Gain (dBi)	1.95	2.23	2.07
Efficiency (%)	42	66.5	50

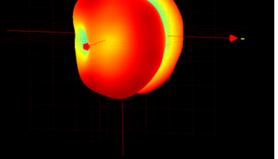

5500 MHz

Frequency (MHz)	5150	5500	5850
Avg. Gain (dBi)	-4.75	-1.61	-1.36
Peak Gain (dBi)	3.87	4.05	3.92
Efficiency (%)	70	76.8	64



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

REVISED: 12.21.2020

3.2 x 1.6 x 1.2mm


MSL = 3

(Pb) RoHS/RoHS II Compliant

ACAG0301-24505500-T


3.2 x 1.6 x 1.2mm RoHS/RoHS II Compliant MSL = 3

REFLOW SOLDERING STANDARD CONDITION

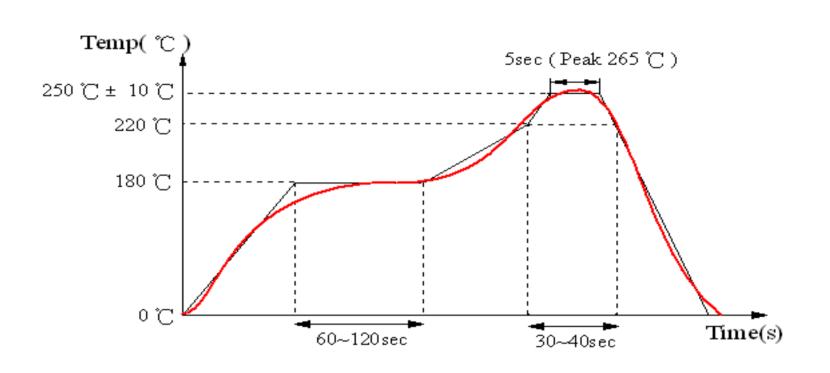

PACKAGING

Reel (3000 pcs/Reel) Size of the carton: 330 x 210 x 210 mm

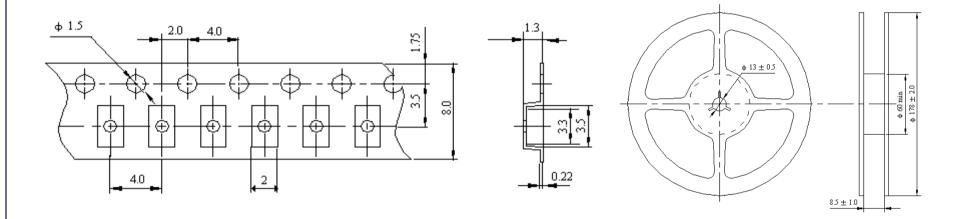

Dimensions: mm

Storage Temperature Range : <30 degree C, Humidity : <60%RH
MSL - 3
Oxidizable, 12 months in a vacuum sealed bag.
Once opened, please repack the unused items within 168 hours by re-seal package treatment.



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

REVISED: 12.21.2020

ACAG0301-24505500-T



CAUTIONS

1. Static voltage

Static voltage between signal & ground may cause deterioration & destruction of the component. Please avoid static voltage.

2. Ultrasonic cleaning

Ultrasonic vibration may cause deterioration & destruction of the component. Please avoid ultrasonic cleaning.

3. Soldering

Only leads of the component may be soldered. Please avoid soldering to any other part of the component, such as on the patterns as this will change the performance of the antenna.



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com **REVISED: 12.21.2020**