


		1		
Part Number:		DRAWN		
TEOO	2603-1	CJ	8/2/2017	
1092		CHECKED	8/3/2017	
		P.D.		
Description:		APPROVED	0/2/2017	
Electro-Mechani	nical Transducer	C.E.	8/3/2017	


This document contains data proprietary to DB Unlimited. Any use or reproduction, in any form, without prior written permission of DB Unlimited is prohibited. All terms and conditions can be found at www.dbunlimitedco.com

## Top View

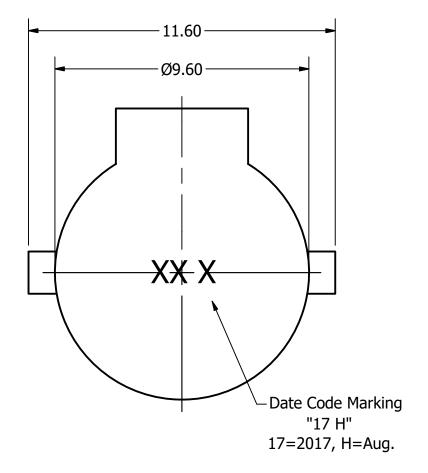



Surface Mount


## Side View

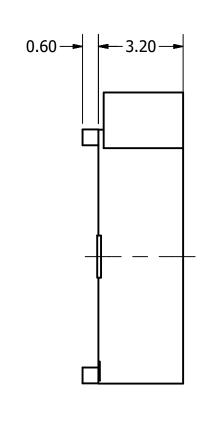

## **Bottom View**

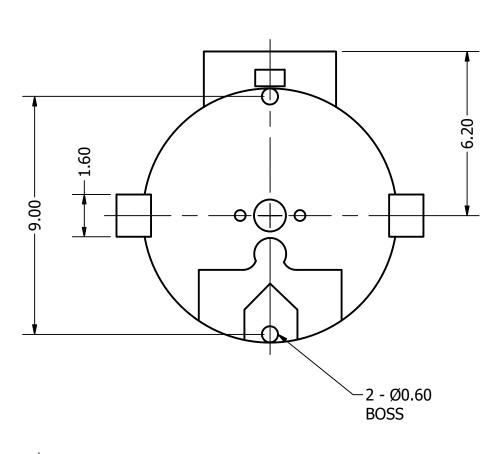

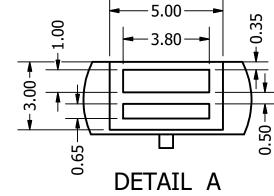

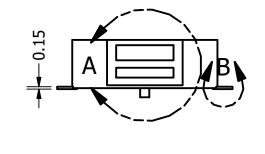

3) All parts meet RoHS

1	Max.	0.05
	5 <u>+</u>	<u> </u>
	` <del> </del>	<u> </u>
		Max 0.05
DETAIL	В	

Items	Specifications	Conditions	0.	DETAIL A	DETAIL B	
Sound Pressure Level	90	dB (@ 10cm)				
Resonant Frequency	2670	Hz	REVISION HISTORY			
Rated Voltage	3.6	V	REV	DESCRIPTION	DATE	APPROVED
Voltage Range	2 ~ 5	V		Released from Engineering	10/21/2013	J.S.
Coil Resistance	16	Ω	1	Changed p/n from TE062603-1	8/19/2014	J.S.
Max. Rated Current	80	mA	2	New tmplate, add detail views	8/2/2017	C.E.
Storage Temperature	-30 ~ +70	°C	NOTES			
Operating Temperature	-30 ~ +70	°C	1) All dimensions are in mm unless otherwise noted			
Connection Method	Surface Mount Pads		2) All tolerances are ± 0.2 mm unless otherwise noted			

**Housing Material** 4) Subject to change or redrawn without notice LCP Weight 0.5 g

Downloaded from Arrow.com.

Mount Type