
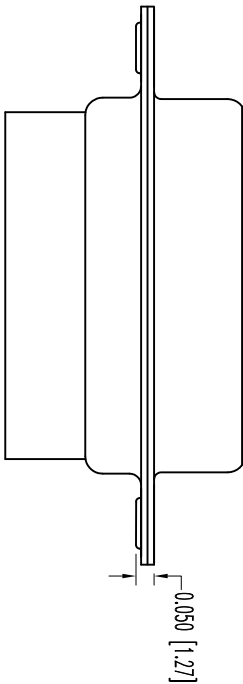
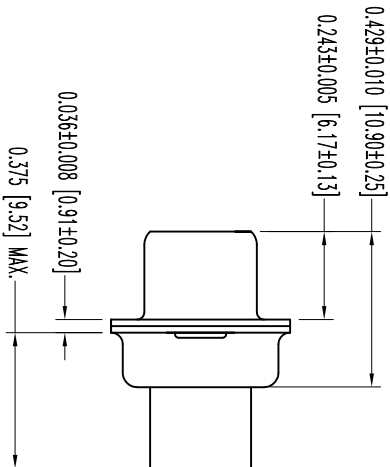


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE INFORMATION IS PRESENTED AS GIVEN AND NOT GUARANTEED, POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	OK
5-9-06	NC	ECO 25931	RCY	ME	TK
10-25-11	A	ECO 34632	COLE	TL	COLE

SK7937

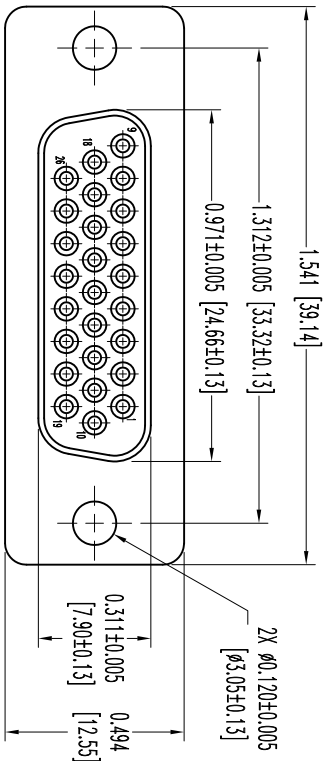

NOTES:

1. MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, BLACK COLOR.
SHELS: STEEL, TIN PLATE.
2. DETAILED PRODUCT, MECHANICAL, AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY D-SUB PRODUCT PUBLICATION, VISIT CONNECTPOSITRONIC.COM/PRODUCTS/39/HIGHDENSITYD-SUBMINIATURE OR CONNECTPOSITRONIC.COM.
3. CONNECTORS ARE ROHS COMPLIANT PER ROHS DIRECTIVE 2002/95/EC OF 27 JAN. 2003.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].



POSITRONIC INDUSTRIES INC.
www.connectpositronic.com

FSC# 28198




DECIMAL TOL.
± 0.015 [0.38]

DATE
5-9-06

DRAWING NUMBER
SK7937

REV.
A



ANGULAR TOL.
± 9°

DD SERIES
ODD

SCALE
N.T.S.

DRAWN BY
M. ENFA

APPROVED BY
R. WILLIAMS

TITLE
ODD26F0000X/AA

DATE
5-9-06

REV.
A