

LFB212G45CGAD340

Note: This datasheet may be out of date.

Please download the latest datasheet of LFB212G45CGAD340 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=LFB212G45CGAD340

In Production










Appearance & Shape

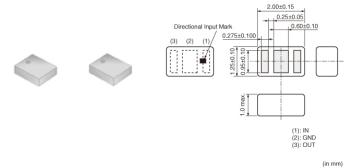

f

Features

Ultra-small, low-profiled, lightweight chip filters based on ceramic multilayer technology.

Extremely ultra-small band-bass filters.

- 1. Ultra-small, low-profiled, lightweight band-pass filters.
- 2. Absolutely no adjustment required.
- 3. Reflow solderable.
- 4. Available in tape and reel packagings for automatic mounting.



Packaging Information

Packaging	Specifications	Standard Packing Quantity
-	180mm Embossed Tape	4000

1 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





LFB212G45CGAD340

Note: This datasheet may be out of date.

Please download the latest datasheet of LFB212G45CGAD340 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=LFB212G45CGAD340



Specifications

Applications	WLAN / for Bluetooth® products	
Nominal Center Frequency (fo)	2450.00MHz	
Bandwidth(BW)	fo±50.00MHz	
Insertion Loss in BW I)	2.50dB max. (at 25°C)	
Insertion Loss in BW II)	2.80dB max. (-40 to +85°C)	
Attenuation(Absolute Value) I)	40.0dB min. at 650.00 to 1990. 00MHz	
Attenuation(Absolute Value)	35.0dB min. at 2110.00 to 2170.00MHz	
Attenuation(Absolute Value) III)	35.0dB min. at 4800.00 to 5000.00MHz	
Attenuation(Absolute Value) IV)	19.0dB min. at 7200.00 to 7500.00MHz	
VSWR(max.)	2.0	
Characteristic Impedance (Nom.)	50Ω	
Power Capacity	500mW	
Operating Temperature Range	-40°C to 85°C	
L x W (size)	2.00x1.25mm	
Thickness(max.)	0.95mm	

2 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.



LFB212G45CGAD340


Note: This datasheet may be out of date.


Please download the latest datasheet of LFB212G45CGAD340 from the official website of Murata Manufacturing Co., Ltd.

http://www.murata.com/en/products/productdetail?partno=LFB212G45CGAD340



Product Data





Frequency Characteristics

Spurious Response

3 of 3

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

