

AD20

Penta-Band Internal PCB Antenna

Features

- ◆ Compact Design
- ◆ Covers 850/900/1800/1900/2100 MHz bands
- ◆ Various cable/connector options
- ◆ Ideal for fixed and mobile terminals

Specifications

Radiating element	Monopole Element
Frequency range	850/900/1800/1900/2100 MHz
Gain	0 dBi
Polarisation	Linear
Return loss	-10.0 dB
Power rating	10W
Cable / Connector	Various including MMCX, U.FL, SMA
Dimensions	47.2 x 15.1mm

Popular Ordering Options

FADT35174-MR-10	AD20 with 100mm RG-178 and MMCX Connector
FADT35174-UF-10	AD20 with 100mm cable and U.FL Connector

Specifications subject to change without notice.


5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com


EAD
embedded antenna design ltd
Delivering Antenna Innovation

AD20 | Penta-Band Internal PCB Antenna

Return Loss

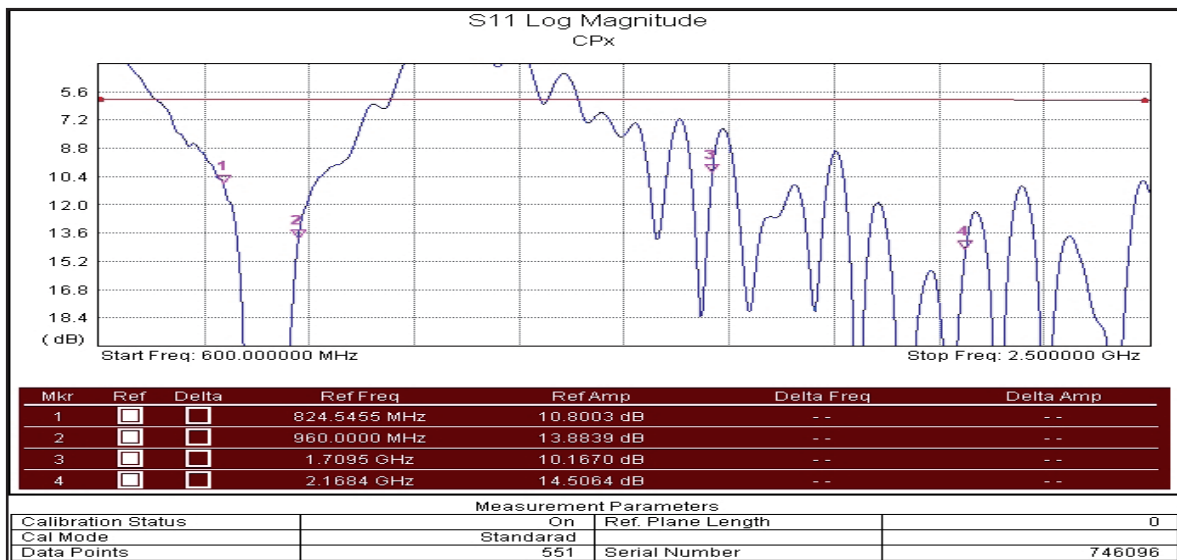

Outline Drawing

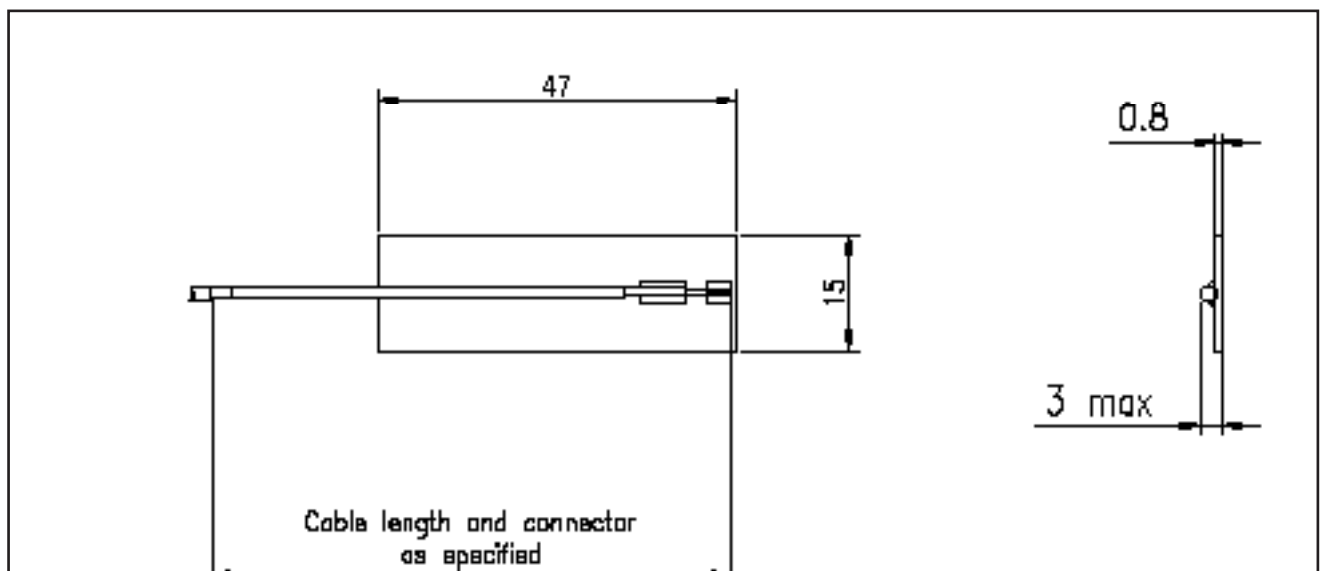

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1TF
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com

EAD
embedded antenna design ltd
Delivering Antenna Innovation