WIMA FKP 1

Polypropylene (PP) Capacitors for Very High Pulse Applications with Metal Foil Electrodes and Metallized Internal Series Connection in PCM 15 mm to 52.5 mm. Capacitances from 100 pF to 4.7 µF. Rated Voltages from 400 VDC to 6000 VDC.

Special Features

- **Extremely high pulse duty**
- **Self-healing**
- **Internal series connection**
- **Very low dissipation factor**
- **Negative capacitance change versus temperature**
- **AEC-Q200 qualified** AEC-Q200
- **According to RoHS 2015/863/EU**

Typical Applications

For high pulse and high frequency applications e.g.

- **Switch mode power supplies**
- **Converters in drives and power electronics**
- **Deflection systems in monitors and TV-sets**
- **Electronic ballasts**

Construction

Dielectric:
Polypropylene (PP) film
Capacitor electrodes:
Aluminium foil and double-sided metallized plastic film
Internal construction:

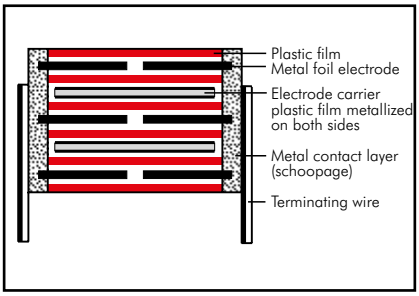

Encapsulation:
Solvent-resistant, flame-retardant plastic case with epoxy resin seal, UL 94 V-0
Terminations:
Tinned wire.
Marking:
Colour: Red. Marking: Black.

Electrical Data

Capacitance range:
100 pF to 4.7 µF (E12-values on request)
Rated voltages:
400 VDC, 630 VDC, 1000 VDC, 1250 VDC, 1600 VDC, 2000 VDC, 4000 VDC, 6000 VDC
Capacitance tolerances:
±20%, ±10%, ±5% (other tolerances are available subject to special enquiry)
Operating temperature range:
–55° C to +105° C
Climatic test category:
55/100/56 in accordance with IEC
THB: 85° C / 85% RH / 1000 hours at U_{rDC}
Test voltage: 2 sec

Dielectric absorption: 0.05%
Insulation resistance at +20° C:
C ⩽ 0.1 µF: ⩾ 1 x 10^5 MΩ
C > 0.1 µF: ⩾ 30 000 sec (MΩ x µF)
Measuring voltage: 100 V/1 min.
Voltage derating:
A voltage derating factor of 1.35 % per K must be applied from +85° C for DC voltages and from +75° C for AC voltages
Reliability:
Operational life > 300 000 hours
Failure rate < 1 fit (0.5 x U_r and 40° C)

PCM	< 4000 VDC	4000 VDC	6000 VDC
< 37.5	2 U_r	2 U_r	1.6 U_r
⩾ 37.5	2 U_r	1.6 U_r	1.2 U_r

Dissipation factors at +20° C: tan δ

at f	C ⩽ 0.1 µF	0.1 µF < C ⩽ 1.0 µF	C > 1.0 µF
1 kHz	⩽ 5x10^{-4}	⩽ 5x10^{-4}	⩽ 5x10^{-4}
10 kHz	⩽ 6x10^{-4}	⩽ 6x10^{-4}	–
100 kHz	⩽ 10x10^{-4}	–	–

Maximum pulse rise time:

Capacitance pF/µF	max. pulse rise time V/µsec at T_A < 40° C							
	400VDC	630VDC	1000VDC	1250VDC	1600VDC	2000VDC	4000VDC	6000VDC
100 ... 220	–	–	–	–	56000	56000	–	–
330 ... 680	–	–	–	–	51000	56000	56000	56000
1000 ... 2200	29000	29000	29000	29000	46000	51000	51000	51000
3300 ... 6800	9000	14000	27000	29000	29000	29000	29000	29000
0.01 ... 0.022	9000	11000	11000	11000	11000	13000	13000	13000
0.033... 0.068	9000	11000	11000	11000	11000	11000	13000	13000
0.1 ... 0.22	7000	11000	11000	11000	11000	11000	13000	13000
0.33 ... 0.68	6000	10000	11000	11000	11000	11000	–	–
1.0 ... 2.2	5000	6600	8300	9500	11000	–	–	–
3.3 ... 4.7	2500	–	–	–	–	–	–	–

Mechanical Tests

Pull test on pins:
d ⩽ 0.8 Ø: 10 N in direction of pins
d > 0.8 Ø: 20 N in direction of pins
according to IEC 60068-2-21
Vibration: 6 hours at 10 ... 2000 Hz and 0.75 mm displacement amplitude or 10 g in accordance with IEC 60068-2-6
Low air density: 1kPa = 10 mbar in accordance with IEC 60068-2-13
Bump test: 4000 bumps at 390 m/sec^2 in accordance with IEC 60068-2-29

Packing

Available taped and reeled up to and including case size 15 x 26 x 31.5 / PCM 27.5 mm.

Detailed taping information and graphs at the end of the catalogue.

For further details and graphs please refer to Technical Information.

Downloaded from Arrow.com.

Continuation

General Data

Capacitance	400 VDC/250 VAC* W	H	L	PCM**	Part number	630 VDC/400 VAC* W	H	L	PCM**	Part number
1000 pF	5	11	18	15	FKP1G011004B_____	5	11	18	15	FKP1J011004B_____
1500 „	5	11	18	15	FKP1G011504B_____	5	11	18	15	FKP1J011504B_____
2200 „	5	11	18	15	FKP1G012204B_____	5	11	18	15	FKP1J012204B_____
3300 „	5	11	18	15	FKP1G013304B_____	5	11	18	15	FKP1J013304B_____
4700 „	5	11	18	15	FKP1G014704B_____	5	11	18	15	FKP1J014704B_____
6800 „	5	11	18	15	FKP1G016804B_____	6	12.5	18	15	FKP1J016804C_____
0.01 µF	5	11	18	15	FKP1G021004B_____	7	14	18	15	FKP1J021004D_____
						5	14	26.5	22.5	FKP1J021005A_____
0.015 „	6	12.5	18	15	FKP1G021504C_____	8	15	18	15	FKP1J021504F_____
						6	15	26.5	22.5	FKP1J021505B_____
0.022 „	7	14	18	15	FKP1G022204D_____	7	16.5	26.5	22.5	FKP1J022205D_____
	5	14	26.5	22.5	FKP1G022205A_____					
0.033 „	8	15	18	15	FKP1G023304F_____	8.5	18.5	26.5	22.5	FKP1J023305F_____
	6	15	26.5	22.5	FKP1G023305B_____					
0.047 „	7	16.5	26.5	22.5	FKP1G024705D_____	10.5	20.5	26.5	22.5	FKP1J024705H_____
						9	19	31.5	27.5	FKP1J024706A_____
0.068 „	8.5	18.5	26.5	22.5	FKP1G026805F_____	11	21	31.5	27.5	FKP1J026806B_____
						9	19	41.5	37.5	FKP1J026807A_____
0.1 µF	10.5	20.5	26.5	22.5	FKP1G031005H_____	13	24	31.5	27.5	FKP1J031006D_____
	9	19	31.5	27.5	FKP1G031006A_____	11	22	41.5	37.5	FKP1J031007B_____
0.15 „	11	21	31.5	27.5	FKP1G031506B_____	13	24	41.5	37.5	FKP1J031507C_____
0.22 „	13	24	31.5	27.5	FKP1G032206D_____	15	26	41.5	37.5	FKP1J032207D_____
	11	22	41.5	37.5	FKP1G032207B_____					
0.33 „	13	24	41.5	37.5	FKP1G033307C_____	19	32	41.5	37.5	FKP1J033307F_____
0.47 „	17	29	41.5	37.5	FKP1G034707E_____	20	39.5	41.5	37.5	FKP1J034707G_____
0.68 „	19	32	41.5	37.5	FKP1G036807F_____	24	45.5	41.5	37.5	FKP1J036807H_____
1.0 µF	20	39.5	41.5	37.5	FKP1G041007G_____	35	50	41.5	37.5	FKP1J041007J_____
1.5 „	31	46	41.5	37.5	FKP1G041507I_____	40	55	41.5	37.5	FKP1J041507K_____
						35	50	57	52.5	FKP1J041509F_____
2.2 „	35	50	41.5	37.5	FKP1G042207J_____	45	55	57	52.5	FKP1J042209H_____
3.3 „	35	50	57	52.5	FKP1G043309F_____					
4.7 „	45	65	57	52.5	FKP1G044709J_____					

* AC voltages: f ⩽ 1000 Hz; 1.4 x U_{rms} + UDC ⩽ U_r

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completeion:		
Version code:	2-pin	= 00
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD

Taped version see page 133.

Rights reserved to amend design data without prior notification.

Continuation page 65

Downloaded from Arrow.com.

Continuation

General Data

Capacitance	1000 VDC/600 VAC* W	H	L	PCM**	Part number
1000 pF	5	11	18	15	FKP1O111004B_____
1500 „	5	11	18	15	FKP1O111504B_____
2200 „	5	11	18	15	FKP1O112204B_____
3300 „	5	11	18	15	FKP1O113304B_____
4700 „	6	12.5	18	15	FKP1O114704C_____
6800 „	7	14	18	15	FKP1O116804D_____
0.01 µF	8	15	18	15	FKP1O121004F_____
	6	15	26.5	22.5	FKP1O121005B_____
0.015 „	6	15	26.5	22.5	FKP1O121505B_____
0.022 „	8.5	18.5	26.5	22.5	FKP1O122205F_____
0.033 „	10.5	20.5	26.5	22.5	FKP1O123305H_____
	9	19	31.5	27.5	FKP1O123306A_____
0.047 „	11	21	31.5	27.5	FKP1O124706B_____
0.068 „	13	24	31.5	27.5	FKP1O126806D_____
	11	22	41.5	37.5	FKP1O126807B_____
0.1 µF	13	24	41.5	37.5	FKP1O131007C_____
0.15 „	15	26	41.5	37.5	FKP1O131507D_____
0.22 „	19	32	41.5	37.5	FKP1O132207F_____
0.33 „	20	39.5	41.5	37.5	FKP1O133307G_____
0.47 „	31	46	41.5	37.5	FKP1O134707I_____
0.68 „	35	50	41.5	37.5	FKP1O136807J_____
1.0 µF	40	55	41.5	37.5	FKP1O141007K_____
	35	50	57	52.5	FKP1O141009F_____
1.5 „	45	55	57	52.5	FKP1O141509H_____
2.2 „	45	65	57	52.5	FKP1O142209J_____

* AC voltages: f ⩽ 1000 Hz; 1.4 x U_{rms} + UDC ⩽ U_r

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:		
Version code:	2-pin	= 00
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD

Taped version see page 133.

2-pin version

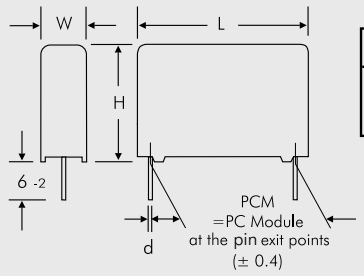

Ø d	PCM
0.8	15 - 27.5
1.0	37.5

4-pin version

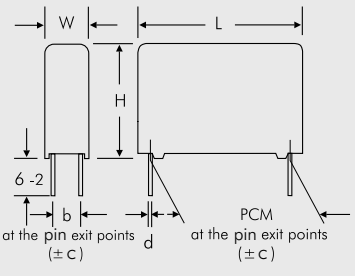

W	PCM	b	Ø d	c
17	37.5	10	1.0	0.4
19	37.5	10	1.0	0.4
20	37.5	12.5	1.0	0.4
24	37.5	12.5	1.0	0.4
31	37.5	20	1.0	0.4
35	37.5	20	1.0	0.4
40	37.5	20	1.0	0.4
35	52.5	20	1.2	0.8
45	52.5	20	1.2	0.8

Rights reserved to amend design data without prior notification

Continuation page 66

Downloaded from Arrow.com.

Continuation

General Data

Capacitance	1250 VDC/600 VAC* W	H	L	PCM**	Part number	1600 VDC/650 VAC* W	H	L	PCM**	Part number
100 pF						5	11	18	15	FKP1T001004B_____
150 „						5	11	18	15	FKP1T001504B_____
220 „						5	11	18	15	FKP1T002204B_____
330 „						5	11	18	15	FKP1T003304B_____
470 „						5	11	18	15	FKP1T004704B_____
680 „						5	11	18	15	FKP1T006804B_____
1000 pF	5	11	18	15	FKP1R011004B_____	6	12.5	18	15	FKP1T011004C_____
						5	14	26.5	22.5	FKP1T011005A_____
1500 „	5	11	18	15	FKP1R011504B_____	7	14	18	15	FKP1T011504D_____
						5	14	26.5	22.5	FKP1T011505A_____
2200 „	5	11	18	15	FKP1R012204B_____	8	15	18	15	FKP1T012204F_____
						5	14	26.5	22.5	FKP1T012205A_____
3300 „	6	12.5	18	15	FKP1R013304C_____	6	15	26.5	22.5	FKP1T013305B_____
4700 „	7	14	18	15	FKP1R014704D_____	7	16.5	26.5	22.5	FKP1T014705D_____
6800 „	8	15	18	15	FKP1R016804F_____	8.5	18.5	26.5	22.5	FKP1T016805F_____
	5	14	26.5	22.5	FKP1R016805A_____					
0.01 µF	7	16.5	26.5	22.5	FKP1R021005D_____	10.5	20.5	26.5	22.5	FKP1T021005H_____
0.015 „	8.5	18.5	26.5	22.5	FKP1R021505F_____	11	21	31.5	27.5	FKP1T021506B_____
0.022 „	10.5	20.5	26.5	22.5	FKP1R022205H_____	11	21	31.5	27.5	FKP1T022206B_____
0.033 „	11	21	31.5	27.5	FKP1R023306B_____	13	24	31.5	27.5	FKP1T023306D_____
	9	19	41.5	37.5	FKP1R023307A_____	13	24	41.5	37.5	FKP1T023307C_____
0.047 „	13	24	31.5	27.5	FKP1R024706D_____	13	24	41.5	37.5	FKP1T024707C_____
	11	22	41.5	37.5	FKP1R024707B_____					
0.068 „	11	22	41.5	37.5	FKP1R026807B_____	15	26	41.5	37.5	FKP1T026807D_____
0.1 µF	15	26	41.5	37.5	FKP1R031007D_____	17	29	41.5	37.5	FKP1T031007E_____
0.15 „	17	29	41.5	37.5	FKP1R031507E_____	20	39.5	41.5	37.5	FKP1T031507G_____
0.22 „	19	32	41.5	37.5	FKP1R032207F_____	24	45.5	41.5	37.5	FKP1T032207H_____
0.33 „	24	45.5	41.5	37.5	FKP1R033307H_____	31	46	41.5	37.5	FKP1T033307I_____
0.47 „	31	46	41.5	37.5	FKP1R034707I_____	40	55	41.5	37.5	FKP1T034707K_____
0.68 „	40	55	41.5	37.5	FKP1R036807K_____	35	50	57	52.5	FKP1T036809F_____
1.0 µF	35	50	57	52.5	FKP1R041009F_____	45	55	57	52.5	FKP1T041009H_____
1.5 „	45	65	57	52.5	FKP1R041509J_____					

* AC voltages: f ⩽ 1000 Hz; 1.4 x U_{rms} + UDC ⩽ U_r

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:		
Version code:	2-pin	= 00
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD

Taped version see page 133.

Rights reserved to amend design data without prior notification

Continuation page 67

Downloaded from Arrow.com.

Continuation

General Data

Capacitance	2000 VDC/700 VAC* W	H	L	PCM**	Part number	4000 VDC/700 VAC* W	H	L	PCM**	Part number
100 pF	5	11	18	15	FKP1U001004B_____					
150 „	5	11	18	15	FKP1U001504B_____					
220 „	5	11	18	15	FKP1U002204B_____					
330 „	6	12.5	18	15	FKP1U003304C_____					
470 „	6	12.5	18	15	FKP1U004704C_____	5	14	26.5	22.5	FKP1X004705A_____
680 „	6	12.5	18	15	FKP1U006804C_____	5	14	26.5	22.5	FKP1X006805A_____
1000 pF	7	14	18	15	FKP1U011004D_____	5	14	26.5	22.5	FKP1X011005A_____
	5	14	26.5	22.5	FKP1U011005A_____					
1500 „	6	15	26.5	22.5	FKP1U011505B_____	7	16.5	26.5	22.5	FKP1X011505D_____
2200 „	7	16.5	26.5	22.5	FKP1U012205D_____	8.5	18.5	26.5	22.5	FKP1X012205F_____
3300 „	7	16.5	26.5	22.5	FKP1U013305D_____	10.5	20.5	26.5	22.5	FKP1X013305H_____
4700 „	8.5	18.5	26.5	22.5	FKP1U014705F_____	11	21	31.5	27.5	FKP1X014706B_____
6800 „	10.5	20.5	26.5	22.5	FKP1U016805H_____	13	24	31.5	27.5	FKP1X016806D_____
0.01 µF	11	21	31.5	27.5	FKP1U021006B_____	15	26	31.5	27.5	FKP1X021006F_____
0.015 „	13	24	31.5	27.5	FKP1U021506D_____	13	24	41.5	37.5	FKP1X021507C_____
0.022 „	15	26	31.5	27.5	FKP1U022206F_____	17	29	41.5	37.5	FKP1X022207E_____
	13	24	41.5	37.5	FKP1U022207C_____					
0.033 „	13	24	41.5	37.5	FKP1U023307C_____	20	39.5	41.5	37.5	FKP1X023307G_____
0.047 „	17	29	41.5	37.5	FKP1U024707E_____	24	45.5	41.5	37.5	FKP1X024707H_____
0.068 „	19	32	41.5	37.5	FKP1U026807F_____	31	46	41.5	37.5	FKP1X026807I_____
0.1 µF	20	39.5	41.5	37.5	FKP1U031007G_____	35	50	41.5	37.5	FKP1X031007J_____
0.15 „	24	45.5	41.5	37.5	FKP1U031507H_____	40	55	41.5	37.5	FKP1X031507K_____
0.22 „	35	50	41.5	37.5	FKP1U032207J_____	45	55	57	52.5	FKP1X032209H_____
0.33 „	40	55	41.5	37.5	FKP1U033307K_____					
0.47 „	45	55	57	52.5	FKP1U034709H_____					
0.68 „	45	65	57	52.5	FKP1U036809J_____					

* AC voltages: f ⩽ 1000 Hz; 1.4 x U_{rms} + UDC ⩽ U_r

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:		
Version code:	2-pin	= 00
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD

Taped version see page 133.

2-pin version

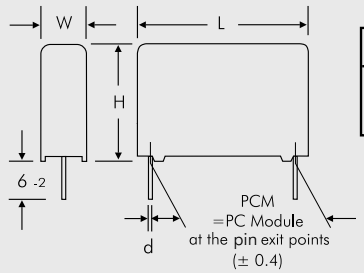

Ø d	PCM
0.8	15 - 27.5
1.0	37.5

4-pin version

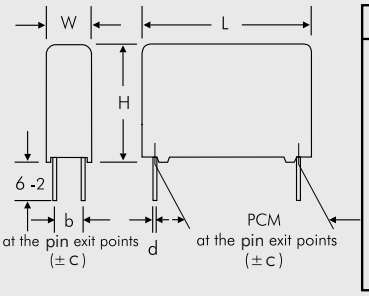

W	PCM	b	Ø d	c
17	37.5	10	1.0	0.4
19	37.5	10	1.0	0.4
20	37.5	12.5	1.0	0.4
24	37.5	12.5	1.0	0.4
31	37.5	20	1.0	0.4
35	37.5	20	1.0	0.4
40	37.5	20	1.0	0.4
35	52.5	20	1.2	0.8
45	52.5	20	1.2	0.8

Rights reserved to amend design data without prior notificationn.

Continuation page 68

Downloaded from Arrow.com.

Continuation

General Data

Capacitance	6000 VDC/700 VAC* W	H	L	PCM**	Part number
470 pF	5	14	26.5	22.5	FKP1Y004705A_____
680 „	5	14	26.5	22.5	FKP1Y006805A_____
1000 pF	5	14	26.5	22.5	FKP1Y011005A_____
1500 „	7	16.5	26.5	22.5	FKP1Y011505D_____
2200 „	10.5	20.5	26.5	22.5	FKP1Y012205H_____
3300 „	10.5	20.5	26.5	22.5	FKP1Y013305H_____
4700 „	11	21	31.5	27.5	FKP1Y014706B_____
6800 „	13	24	31.5	27.5	FKP1Y016806D_____
0.01 µF	15	26	31.5	27.5	FKP1Y021006F_____
0.015 „	13	24	41.5	37.5	FKP1Y021507C_____
0.022 „	17	29	41.5	37.5	FKP1Y022207E_____
0.033 „	20	39.5	41.5	37.5	FKP1Y023307G_____
0.047 „	24	45.5	41.5	37.5	FKP1Y024707H_____
0.068 „	31	46	41.5	37.5	FKP1Y026807I_____
0.1 µF	35	50	41.5	37.5	FKP1Y031007J_____
0.15 „	40	55	41.5	37.5	FKP1Y031507K_____
0.22 „	45	55	57	52.5	FKP1Y032209H_____

* AC voltages: f ⩽ 1000 Hz; 1.4 x U_{rms} + UDC ⩽ U_r

** PCM = Printed circuit module = pin spacing

Dims. in mm.

Ionisation inception level in isolated cases may be lower than admissible rated AC voltage.

Part number completion:		
Version code:	2-pin	= 00
	4-pin	= D4
Tolerance:	20 %	= M
	10 %	= K
	5 %	= J
Packing:	bulk	= S
Pin length:	6-2	= SD

Taped version see page 133.

Rights reserved to amend design data without prior notificationn.

Impedance change with frequency (general guide).

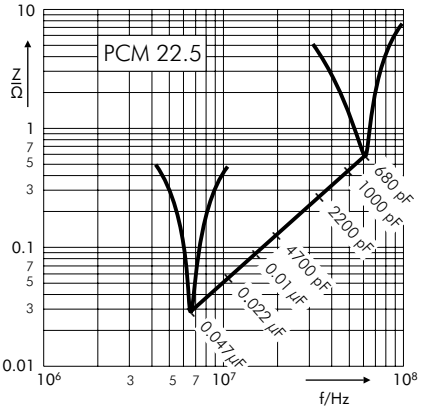

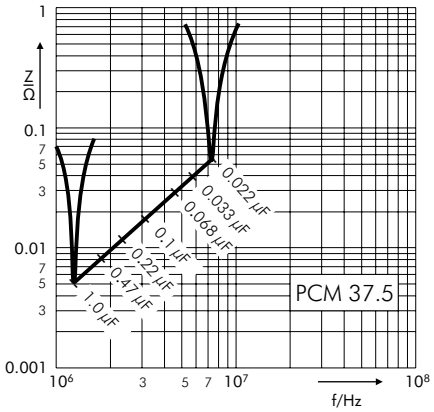

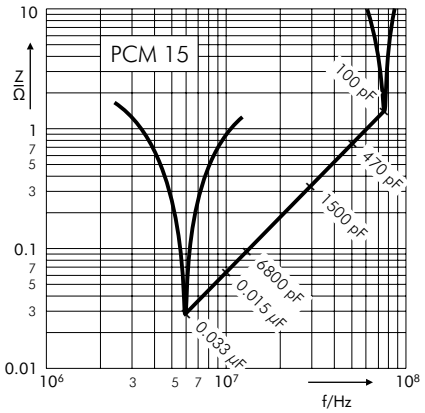

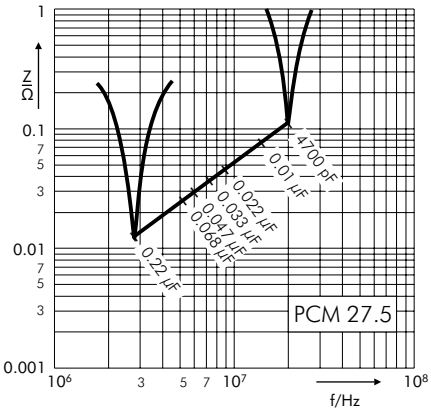

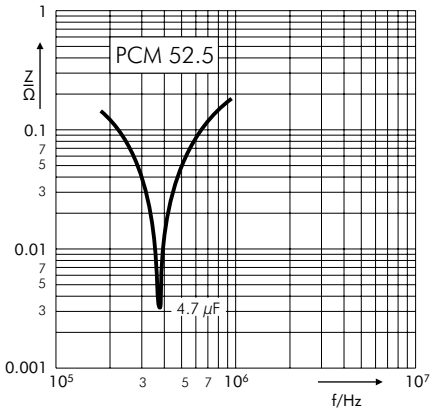

03.26

Continuation page 69

Downloaded from Arrow.com.

Continuation

Permissible AC voltage in relation to frequency till 15° C internal temperature rise (general guide).

The information behind the cross bar denote the PCM of the measured value.

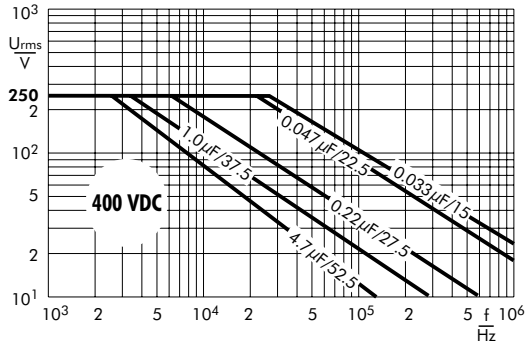

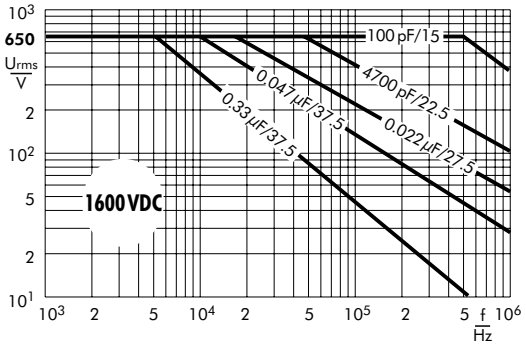

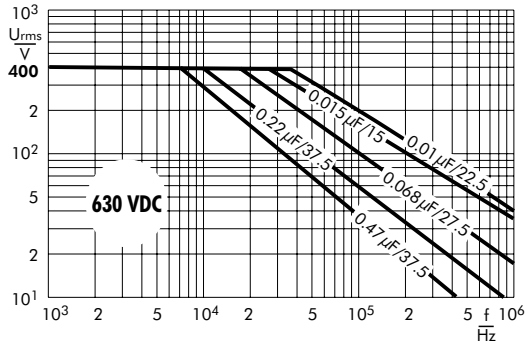

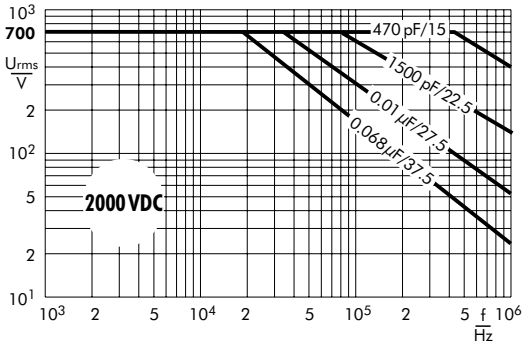

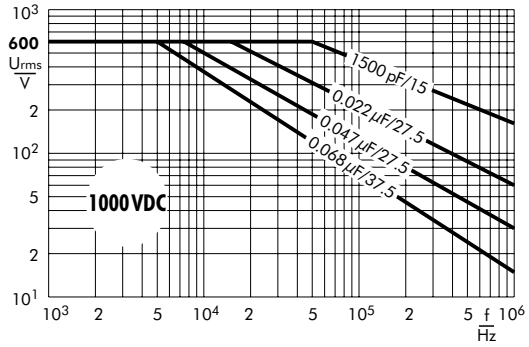

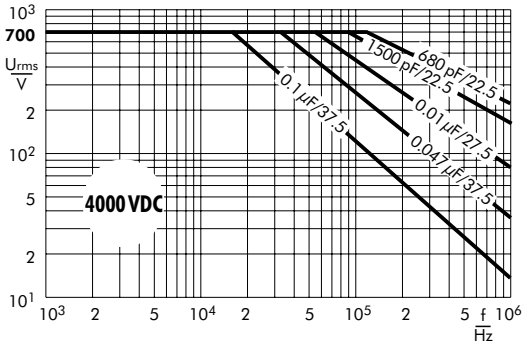

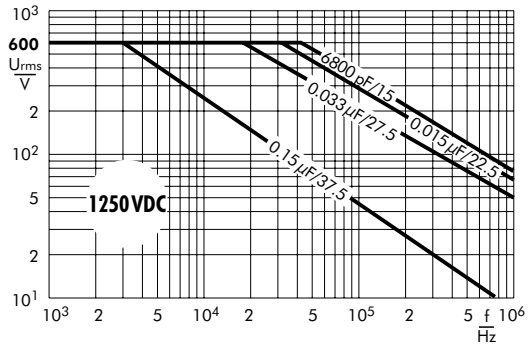

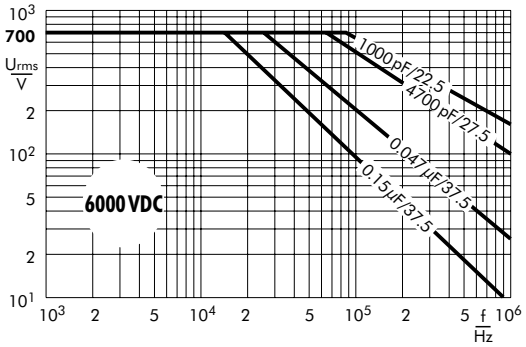

03.26

Continuation page 70

Downloaded from Arrow.com.

Continuation

Permissible AC current in relation to frequency till 15° C internal temperature rise (general guide).

The information behind the cross bar denote the PCM of the measured value.

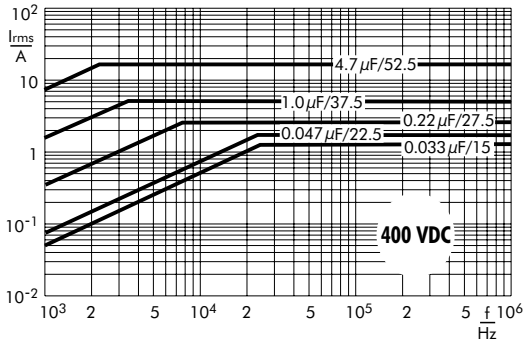

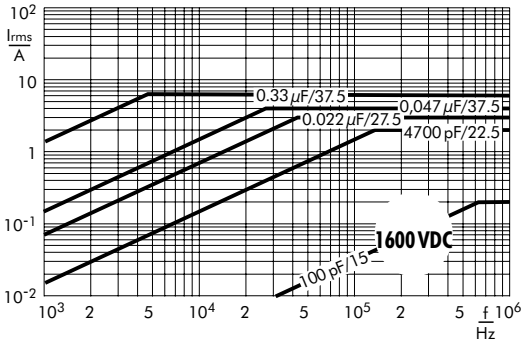

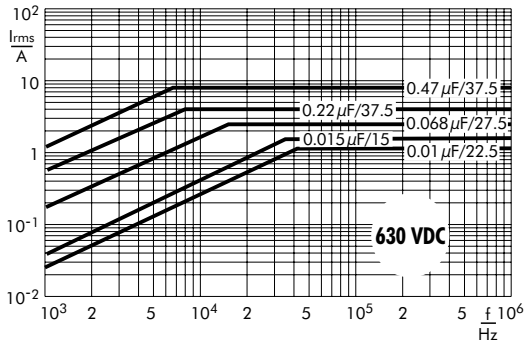

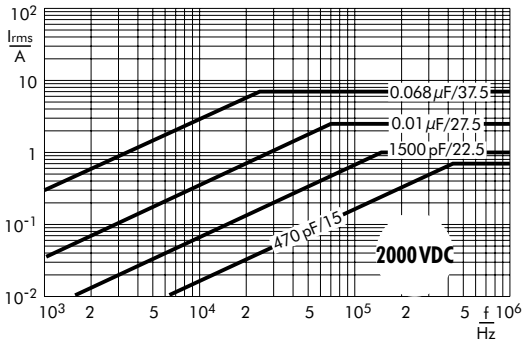

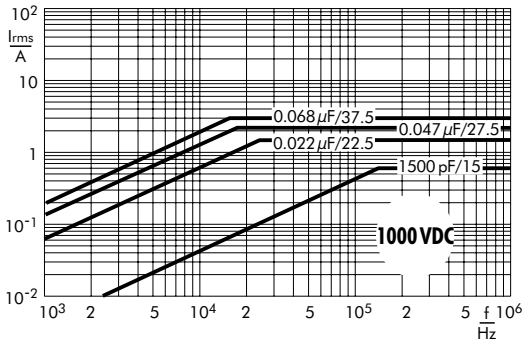

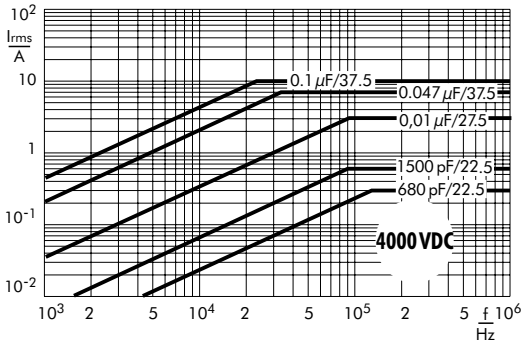

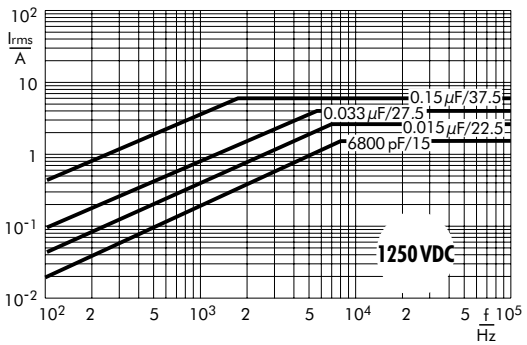

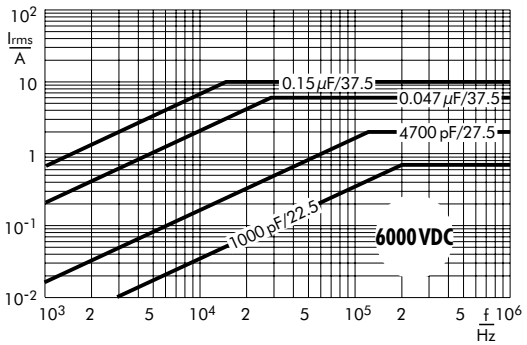

Downloaded from Arrow.com.

Recommendation for Processing and Application of Through-Hole Capacitors

Soldering Process

Internal temperature of the capacitor must be kept as follows:

Polyester: preheating: $T_{max.} \leqslant 125°$ C
soldering: $T_{max.} \leqslant 135°$ C

Polypropylene: preheating: $T_{max.} \leqslant 100°$ C
soldering: $T_{max.} \leqslant 110°$ C

Single wave soldering
Soldering bath temperature: $T < 260°$ C
Dwell time: $t < 5$ sec

Double wave soldering
Soldering bath temperature: $T < 260°$ C
Dwell time: $\sum t < 5$ sec

Due to different soldering processes and heat requirements the graphs are to be regarded as a recommendation only.

Wave soldering

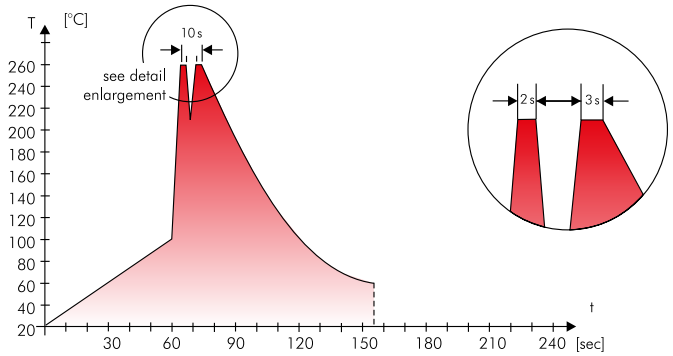

Typical temperature/time graph for double wave soldering

WIMA Quality and Environmental Philosophy

ISO 9001:2015 Certification

ISO 9001:2015 is an international basic standard of quality assurance systems for all branches of industry. The approval according to ISO 9001:2015 of our factories certifies that organisation, equipment and monitoring of quality assurance in our factories correspond to internationally recognized standards.

WIMA WPCS

The WIMA Process Control System (WPCS) is a quality surveillance and optimization system developed by WIMA. WPCS is a major part of the quality-oriented WIMA production. Points of application during production process:

- **incoming material inspection**
- **metallization**
- **film inspection**
- **schoopage**
- **pre-healing**
- **pin attachment**
- **cast resin preparation/encapsulation**
- **100% final inspection**
- **Testing as per customer requirements**

WIMA Environmental Policy

All WIMA capacitors, irrespective of whether through-hole devices or SMD, are made of environmentally friendly materials. Neither during manufacture nor in the product itself any toxic substances are used, e.g.

- **Lead**
- **PCB**
- **CFC**
- **Hydrocarbon chloride**
- **Chromium 6+**
- **PBB/PBDE**
- **Arsenic**
- **Cadmium**
- **Mercury**
- **etc.**

We merely use pure, recyclable materials for packing our components, such as:

- **carton**
- **cardboard**
- **adhesive tape made of paper**
- **polystyrene**

We almost completely refrain from using packing materials such as:

- **adhesive tapes made of plastic**
- **metal clips**

RoHS Compliance

According to the RoHS Directive 2015/863/EU as amended from time to time certain hazardous substances like e.g. lead, cadmium, mercury must not be used any longer in electronic equipment as of July 1st, 2006. For the sake of the environment WIMA has re-fraind from using such substances since years already.

Tape for lead-free WIMA capacitors

DIN EN ISO 14001:2004

WIMA's environmental management has been established in accordance with the guidelines of DIN EN ISO 14001:2004 to optimize the production processes with regard to energy and resources.

03.26

Downloaded from Arrow.com.

Typical Dimensions for Taping Configuration

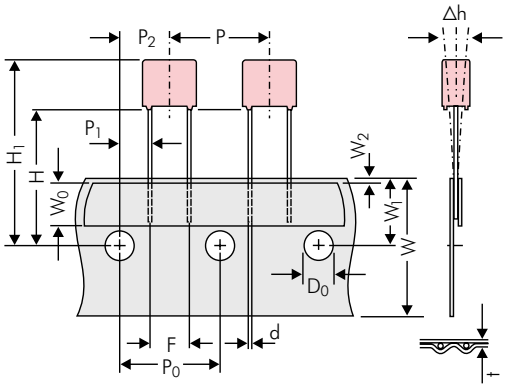

Diagram 1:
PCM 2.5/5/7.5mm

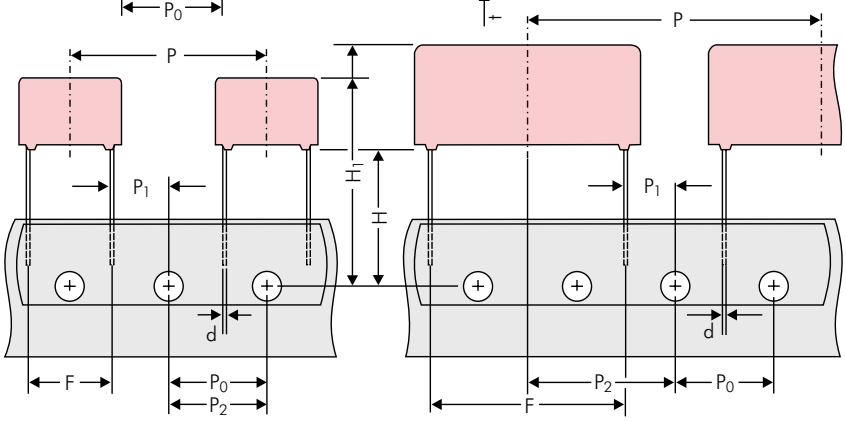

Diagram 2: PCM 10/15 mm

Diagram 3: PCM 22.5 and 27.5*mm
*PCM 27.5 taping possible with two feed holes between components

Designation	Symbol	Dimensions for Radial Taping						
		PCM 2.5 taping	**PCM 5 taping**	**PCM 7.5 taping**	**PCM 10 taping***	**PCM 15 taping***	**PCM 22.5 taping**	**PCM 27.5 taping**
Carrier tape width	W	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5	18.0 ±0.5
Hold-down tape width	W_0	6.0 for hot-sealing adhesive tape	6.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape	12.0 for hot-sealing adhesive tape
Hole position	W_1	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5	9.0 ±0.5
Hold-down tape position	W_2	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.	0.5 to 3.0 max.
Feed hole diameter	D_0	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2	4.0 ±0.2
Pitch of component	P	12.7 ±1.0	12.7 ±1.0	12.7 ±1.0	25.4 ±1.0	25.4 ±1.0	38.1 ±1.5	*38.1 ±1.5 or 50.8 ±1.5
Feed hole pitch	P_0	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch	12.7 ±0.3 cumulative pitch error max. 1.0 mm/20 pitch
Feed hole centre to pin	P_1	5.1 ±0.5	3.85 ±0.7	2.6 ±0.7	7.7 ±0.7	5.2 ±0.7	7.8 ±0.7	5.3 ±0.7
Hole centre to component centre	P_2	6.35 ±1.3	6.35 ±1.3	6.35 ±1.3	12.7 ±1.3	12.7 ±1.3	19.05 ±1.3	19.05 ±1.3
Feed hole centre to bottom edge of the component	H ▲	16.5 ±0.3	16.5 ±0.3	16.5 ±0.5	16.5 ±0.5	16.5 ±0.5	16.5 ±0.5	16.5 ±0.5
		18.5 ±0.5	18.5 ±0.5	18.5 ±0.5	18.5 ±0.5	18.5 ±0.5	18.5 ±0.5	18.5 ±0.5
Feed hole centre to top edge of the component	H_1	$H+H_{component} < H_1$ 32.25 max.	$H+H_{component} < H_1$ 32.25 max.	$H+H_{component} < H_1$ 24.5 to 31.5	$H+H_{component} < H_1$ 25.0 to 31.5	$H+H_{component} < H_1$ 26.0 to 37.0	$H+H_{component} < H_1$ 30.0 to 43.0	$H+H_{component} < H_1$ 35.0 to 45.0
Pin spacing at upper edge of carrier tape	F	2.5 ±0.5	5.0 $^{+0.8}_{-0.2}$	7.5 ±0.8	10.0 ±0.8	15 ±0.8	22.5 ±0.8	27.5 ±0.8
Pin diameter	d	0.4 ±0.05	0.5 ±0.05	•0.5 ±0.05 or $0.6^{+0.06}_{-0.05}$	•0.5 ±0.05 or $0.6^{+0.06}_{-0.05}$	$0.8^{+0.08}_{-0.05}$	$0.8^{+0.08}_{-0.05}$	$0.8^{+0.08}_{-0.05}$
Component alignment	Δh	± 2.0 max.	± 2.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.	± 3.0 max.
Total tape thickness	t	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2	0.6 ±0.2
Package (see also page 134)	▲	ROLL/AMMO		AMMO				
		REEL Ø 360 max. Ø 30 ±1 B 52 ±2 / 58 ±2 depending on comp. dimensions		REEL Ø 360 max. Ø 30 ±1 B 52 ±2 / 58 ±2 / 66 ±2 or REEL Ø 500 max. Ø 25 ±1 B 54 ±2 / 60 ±2 / 68 ±2 depending on PCM and component dimensions				
Unit		see details page 135.						

▲ When ordering please specify dimension H and required packaging type.
Dims in mm.

• Diameter of pins see General Data.
Please clarify customer-specific deviations with the manufacturer.

* PCM 10 and PCM 15 can be crimped to PCM 7.5.
Position of components according to PCM 7.5 (sketch 1). P_0 = 12.7 or 15.0 is possible

03.26

Downloaded from Arrow.com.

Types of Tape Packaging of Capacitors for Automatic Radial Insertion

ROLL Packaging

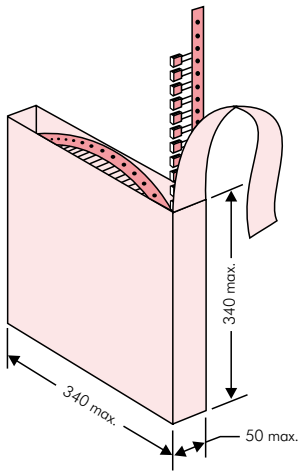

AMMO Packaging

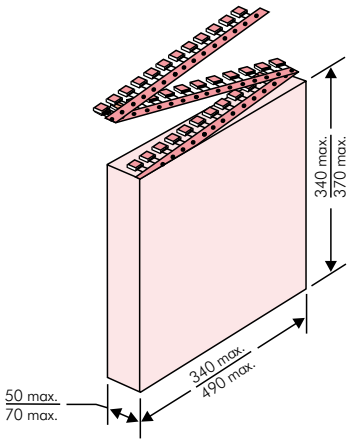

REEL Packaging

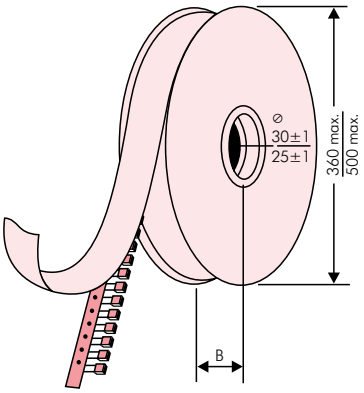

BAR CODE (Labelling)

Labelling of package units in plain text and with alphanumerical Bar Code

- WIMA supplier number
- Date code
- Customer's P/O number
- P/O line
- Customer's part number
- WIMA part number
- Quantity
- WIMA confirmation number
- Country of origin
- Customer name
- Handling unit number
- Week of delivery.

In addition part description of

– article
– capacitance value
– rated voltage
– dimensions
– technical note
– capacitance tolerance
– packing
– connecting information



BARCODE PDF417
BARCODE 2D Datamatrix

03.26

Downloaded from Arrow.com.

Packing Quantities for Capacitors with Radial Pins in PCM 2.5 mm to 22.5 mm

PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL				AMMO			
								Ø 360		Ø 500		340 x 340		490 x 370	
						H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5
	W	H	L	Codes	S	N	O	F	I	H	J	A	C	B	D
2.5 mm	2.5	7	4.6	**0B**	5000	2200		2500		–		2800		–	
	3	7.5	4.6	**0C**	5000	2000		2300		–		2300		–	
	3.8	8.5	4.6	**0D**	5000	1500		1800		–		1800		–	
	4.6	9	4.6	**0E**	5000	1200		1500		–		1500		–	
	5.5	10	4.6	**0F**	5000	900		1200		–		1200		–	
5 mm	2.5	6.5	7.2	**1A**	5000	2200		2500		–		2800		–	
	3	7.5	7.2	**1B**	5000	2000		2300		–		2300		–	
	3.5	8.5	7.2	**1C**	5000	1600		2000		–		2000		–	
	4.5	6	7.2	**1D**	6000	1300		1500		–		1500		–	
	4.5	9.5	7.2	**1E**	4000	1300		1500		–		1500		–	
	5	10	7.2	**1F**	3500	1100		1400		–		1400		–	
	5.5	7	7.2	**1G**	4000	1000		1200		–		1200		–	
	5.5	11.5	7.2	**1H**	2500	1000		1200		–		1200		–	
	6.5	8	7.2	**1I**	2500	800		1000		–		1000		–	
	7.2	8.5	7.2	**1J**	2500	700		1000		–		1000		–	
	7.2	13	7.2	**1K**	2000	700		950		–		1000		–	
	8.5	10	7.2	**1L**	2000	600		800		–		800		–	
	8.5	14	7.2	**1M**	1500	600		800		–		800		–	
	11	16	7.2	**1N**	1000	500		600		–		640		–	
	11	18	7.2	**1O**	1000	500		600		–		640		–	
7.5 mm	2.5	7	10	**2A**	5000	–		2500		4400		2500		–	
	3	8.5	10	**2B**	5000	–		2200		4300		2300		4150	
	4	9	10	**2C**	4000	–		1700		3200		1700		3000	
	4.5	9.5	10.3	**2D**	3500	–		1500		2900		1400		2700	
	5	10.5	10.3	**2E**	3000	–		1300		2500		1300		–	
	5.7	12.5	10.3	**2F**	2000	–		1000		2200		1100		–	
	7.2	12.5	10.3	**2G**	1500	–		900		1800		1000		–	
10 mm	4	9	13	**3C**	3000	–		900		1600		–		1450	
	4	9.5	13	**3D**	3000	–		900		1600		–		1400	
	5	11	13	**3F**	3000	–		700		1300		–		1100	
	6	12	13	**3G**	2400	–		550		1100		–		1000	
	6	12.5	13	**3H**	2400	–		550		1100		–		1000	
	8	12	13	**3I**	2000	–		400		800		–		740	
15 mm	5	11	18	**4B**	2400	–		600		1200		–		1150	
	6	12.5	18	**4C**	2000	–		500		1000		–		1000	
	7	14	18	**4D**	1600	–		450		900		–		850	
	8	15	18	**4F**	1200	–		400		800		–		740	
	9	14	18	**4H**	1200	–		350		700		–		650	
	9	16	18	**4J**	900	–		350		700		–		650	
	11	14	18	**4M**	1000	–		300		600		–		540	
22.5 mm	5	14	26.5	**5A**	1200	–		–		800		–		770	
	6	15	26.5	**5B**	1000	–		–		700		–		640	
	7	16.5	26.5	**5D**	760	–		–		600		–		550	
	8.5	18.5	26.5	**5F**	500	–		–		480		–		450	
	10.5	19	26.5	**5G**	594*	–		–		400		–		360	
	10.5	20.5	26.5	**5H**	594*	–		–		400		–		360	
	11	21	26.5	**5I**	561*	–		–		380		–		350	

* for 2-inch transport pitches.

* TPS (Tray-Packing-System). Plate versions may have different packing units.
Samples and pre-production needs on request.

Rights reserved to amend design data without prior notification.

Downloaded from Arrow.com.

Packing Quantities for Capacitors with Radial Pins in PCM 27.5 mm to 52.5 mm

PCM	Size				bulk	pcs. per packing unit									
						ROLL		REEL				AMMO			
								∅ 360		∅ 500		340 x 340		490 x 370	
						H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5	H16.5	H18.5
	W	H	L	Codes	S	N	O	F	I	H	J	A	C	B	D
27.5 mm	9	19	31.5	**6A**	567*	–		–		460/340*		–		–	
	11	21	31.5	**6B**	459*	–		–		380/280*		–		–	
	13	24	31.5	**6D**	378*	–		–		300		–		–	
	15	26	31.5	**6F**	324*	–		–		270		–		–	
	17	29	31.5	**6G**	198*	–		–		–		–		–	
	17	34.5	31.5	**6I**	198*	–		–		–		–		–	
	20	39.5	31.5	**6J**	162*	–		–		–		–		–	
37.5 mm**	9	19	41.5	**7A**	441*	–		–		–		–		–	
	11	22	41.5	**7B**	357*	–		–		–		–		–	
	13	24	41.5	**7C**	294*	–		–		–		–		–	
	15	26	41.5	**7D**	252*	–		–		–		–		–	
	17	29	41.5	**7E**	154*	–		–		–		–		–	
	19	32	41.5	**7F**	140*	–		–		–		–		–	
	20	39.5	41.5	**7G**	126*	–		–		–		–		–	
	24	45.5	41.5	**7H**	112*	–		–		–		–		–	
	28	38	41.5	**7L**	84*	–		–		–		–		–	
	31	46	41.5	**7I**	84*	–		–		–		–		–	
	35	50	41.5	**7J**	35*	–		–		–		–		–	
	40	55	41.5	**7K**	28*	–		–		–		–		–	
48.5 mm**	19	31	56	**8D**	120*	–		–		–		–		–	
	23	34	56	**8E**	80*	–		–		–		–		–	
	27	37.5	56	**8H**	84*	–		–		–		–		–	
	33	48	56	**8J**	25*	–		–		–		–		–	
	37	54	56	**8L**	25*	–		–		–		–		–	
52.5 mm	25	45	57	**9D**	70*	–		–		–		–		–	
	30	45	57	**9E**	60*	–		–		–		–		–	
	35	50	57	**9F**	25*	–		–		–		–		–	
	45	55	57	**9H**	20*	–		–		–		–		–	
	45	65	57	**9J**	20*	–		–		–		–		–	

* TPS (Tray-Packing-System). Plate versions may have different packing units.
**For Snubber capacitors in 2-pin version the PCM is changing to 38.5 respective 49.5 mm.
Samples and pre-production needs on request.

Rights reserved to amend design data without prior notification.

Updated data on www.wima.com

03.26

Downloaded from Arrow.com.

WIMA Part Number System

A WIMA part number consists of 18 digits and is composed as follows:

Field 1 - 4: Type description
Field 5 - 6: Rated voltage
Field 7 - 10: Capacitance
Field 11 - 12: Size and PCM
Field 13 - 14: Version code (e.g. Snubber versions)
Field 15: Capacitance tolerance
Field 16: Packing
Field 17 - 18: Pin length (untaped)

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
M	**K**	**S**	**2**	**C**	**0**	**2**	**1**	**0**	**0**	**1**	**A**	**0**	**0**	**M**	**S**	**S**	**D**
MKS 2				63 VDC		0.01 µF				2.5x6.5x7.2		-		20%	bulk	6 -2	

Type description:

SMD-PET	= SMDT
SMD-PPS	= SMDI
MKS 02	= MKS0
FKS 2	= FKS2
FKP 2	= FKP2
MKS 2	= MKS2
MKP 2	= MKP2
MKS 4	= MKS4
MKP 4	= MKP4
MKP 10	= MKP1
FKP 1	= FKP1
MKP-X2	= MKX2
MKP-X1 R	= MKX1
MKP-Y2	= MKY2
Snubber MKP	= SNMP
Snubber FKP	= SNFP
GTO MKP	= GTOM
DC-LINK MKP 4	= DCP4
DC-LINK MKP 6	= DCP6
DC-LINK HC	= DCHC

Rated voltage:

63 VDC	= C0
100 VDC	= D0
250 VDC	= F0
400 VDC	= G0
450 VDC	= H0
520 VDC	= H2
600 VDC	= I0
630 VDC	= J0
700 VDC	= K0
800 VDC	= L0
850 VDC	= M0
900 VDC	= N0
1000 VDC	= O1
1100 VDC	= P0
1200 VDC	= Q0
1250 VDC	= R0
1500 VDC	= S0
1600 VDC	= T0
1700 VDC	= TA
2000 VDC	= U0
2500 VDC	= V0
3000 VDC	= W0
4000 VDC	= X0
6000 VDC	= Y0
230 VAC	= 3Y
275 VAC	= 1W
300 VAC	= 2W
305 VAC	= AW
350 VAC	= BW
440 VAC	= 4W
...	

Capacitance:

22 pF	= 0022
47 pF	= 0047
100 pF	= 0100
150 pF	= 0150
220 pF	= 0220
330 pF	= 0330
470 pF	= 0470
680 pF	= 0680
1000 pF	= 1100
1500 pF	= 1150
2200 pF	= 1220
3300 pF	= 1330
4700 pF	= 1470
6800 pF	= 1680
0.01 µF	= 2100
0.022 µF	= 2220
0.047 µF	= 2470
0.1 µF	= 3100
0.22 µF	= 3220
0.47 µF	= 3470
1 µF	= 4100
2.2 µF	= 4220
4.7 µF	= 4470
10 µF	= 5100
22 µF	= 5220
47 µF	= 5470
100 µF	= 6100
220 µF	= 6220
1000 µF	= 7100
1500 µF	= 7150
...	

Size:

4.8x3.3x3 Size 1812	= KA
4.8x3.3x4 Size 1812	= KB
5.7x5.1x3.5 Size 2220	= QA
5.7x5.1x4.5 Size 2220	= QB
7.2x6.1x3 Size 2824	= TA
7.2x6.1x5 Size 2824	= TB
10.2x7.6x5 Size 4030	= VA
12.7x10.2x6 Size 5040	= XA
15.3x13.7x7 Size 6054	= YA
2.5x7x4.6 PCM 2.5	= 0B
3x7.5x4.6 PCM 2.5	= 0C
2.5x6.5x7.2 PCM 5	= 1A
3x7.5x7.2 PCM 5	= 1B
2.5x7x10 PCM 7.5	= 2A
3x8.5x10 PCM 7.5	= 2B
3x9x13 PCM 10	= 3A
4x9x13 PCM 10	= 3C
5x11x18 PCM 15	= 4B
6x12.5x18 PCM 15	= 4C
5x14x26.5 PCM 22.5	= 5A
6x15x26.5 PCM 22.5	= 5B
9x19x31.5 PCM 27.5	= 6A
11x21x31.5 PCM 27.5	= 6B
9x19x41.5 PCM 37.5	= 7A
11x22x41.5 PCM 37.5	= 7B
19x31x56 PCM 48.5	= 8D
25x45x57 PCM 52.5	= 9D
...	

Version code:

Standard	= 00
Version A1	= 1A
Version A1.1.1	= 1B
Version A2	= 2A
...	

Tolerance:

±20%	= M
±10%	= K
±5%	= J
±2.5%	= H
±1%	= E
...	

Packing:

AMMO H16.5 340x340	= A
AMMO H16.5 490x370	= B
AMMO H18.5 340x340	= C
AMMO H18.5 490x370	= D
REEL H16.5 360	= F
REEL H16.5 500	= H
REEL H18.5 360	= I
REEL H18.5 500	= J
ROLL H16.5	= N
ROLL H18.5	= O
BLISTER W12 180	= P
BLISTER W12 330	= Q
BLISTER W16 330	= R
BLISTER W24 330	= T
Bulk/TPS Standard	= S
...	

Pin length (untaped)

3.5 ±0.5	= C9
6 -2	= SD
16 ±1	= P1
...	

Pin length (taped)

none	= 00

The data on this page is not complete and serves only to explain the part number system. Part number information is listed on the pages of the respective WIMA range.

Downloaded from Arrow.com.