

200mW, NPN Small Signal Transistor

FEATURES

- Low power loss, high efficiency
- Ideal for automated placement
- High surge current capability
- Compliant to RoHS directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21


APPLICATIONS

- Switching mode power supply (SMPS)
- Adapters
- Lighting application
- On-board DC/DC converter

MECHANICAL DATA

- Case: SOT-23
- Molding compound meets UL 94 V-0 flammability rating
- Moisture sensitivity level: level 1, per J-STD-020
- Packing code with suffix "G" means green compound (halogen-free)
- Terminal: Matte tin plated leads, solderable per J-STD-002
- Meet JESD 201 class 1A whisker test
- Weight: 8mg (approximately)

KEY PARAMETERS		
PARAMETER	VALUE	UNIT
V_{CBO}	30-80	V
V_{CEO}	30-65	V
V_{EBO}	5-6	V
I_C	0.1	A
h_{FE}	220-800	
Package	SOT-23	
Configuration	Single Dice	



ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)				
PARAMETER		SYMBOL	VALUE	UNIT
Marking code on the device	BC846A		1A	
	BC846B		1B	
	BC847A		1E	
	BC847B		1F	
	BC847C		1G	
	BC848A		1E	
	BC848B		1F	
	BC848C		1G	
Power dissipation		P_D	200	mW

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER		SYMBOL	VALUE	UNIT
Collector-base voltage, emitter open	BC846	V_{CBO}	80	V
	BC847		50	
	BC848		30	
Collector-emitter voltage, base open	BC846	V_{CEO}	65	V
	BC847		45	
	BC848		30	
Emitter-base voltage, collector open	BC846	V_{EBO}	6	V
	BC847		6	
	BC848		5	
Collector current, dc		I_C	0.1	A
Junction temperature		T_J	-55 to +150	$^\circ\text{C}$
Storage temperature		T_{STG}	-55 to +150	$^\circ\text{C}$

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	CONDITIONS		SYMBOL	MIN	TYP	MAX	UNIT
Collector cutoff current, emitter open	$V_{CB} = 30\text{ V}, I_E = 0$		I_{CBO}	-	-	100	nA
Emitter cutoff current, collector open	$V_{EB} = 5\text{ V}, I_C = 0$		I_{EBO}	-	-	0.1	μA
Collector-base voltage, emitter open	$I_C = 10\text{ }\mu\text{A}, I_E = 0$	BC846	V_{CBO}	80	-	-	V
		BC847		50	-	-	
		BC848		30	-	-	
Collector-emitter voltage, base open	$I_C = 10\text{ mA}, I_B = 0$	BC846	V_{CEO}	65	-	-	V
		BC847		45	-	-	
		BC848		30	-	-	
Emitter-base voltage, collector open	$I_E = 1\text{ }\mu\text{A}, I_C = 0$	BC846	V_{EBO}	6	-	-	V
		BC847		6	-	-	
		BC848		5	-	-	
DC current gain	$V_{CE} = 5\text{ V}, I_C = 2\text{ mA}$	BC846A/BC847A/BC848A	h_{FE}	110	-	220	
		BC846B/BC847B/BC848B		200	-	450	
		BC847C/BC848C		420	-	800	

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

PARAMETER	CONDITIONS	SYMBOL	MIN	TYP	MAX	UNIT
Collector-emitter saturation voltage	$I_C = 100\text{ mA}, I_B = 5\text{ mA}$	$V_{CE(sat)}$	-	-	0.5	V
Base-emitter saturation voltage	$I_C = 100\text{ mA}, I_B = 5\text{ mA}$	$V_{BE(sat)}$	-	-	1.1	V
Transition frequency	$V_{CE} = 5\text{ V}, I_C = 10\text{ mA}, f = 100\text{ MHz}$	f_T	100	-	-	MHz

ORDERING INFORMATION

PART NO.	PACKING CODE	PACKING CODE SUFFIX(*)	PACKAGE	PACKING
BC84XX (Note 1)	RF	G	SOT-23	3K / 7" Reel
	R5			10K / 13" Reel

Notes:

1. "xx" is device code from "6A" to "8C"

*: optional available

EXAMPLE

EXAMPLE P/N	PART NO.	PACKING CODE	PACKING CODE SUFFIX	DESCRIPTION
BC846A RFG	BC846A	RF	G	Green compound

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Static Characteristic

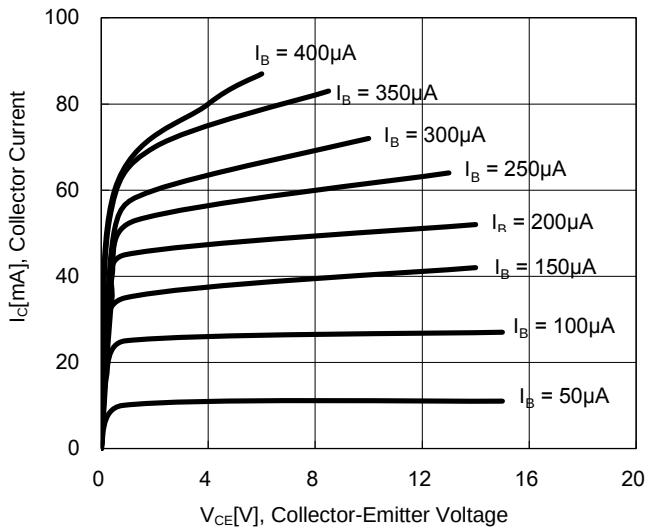


Fig. 2 DC Current Gain

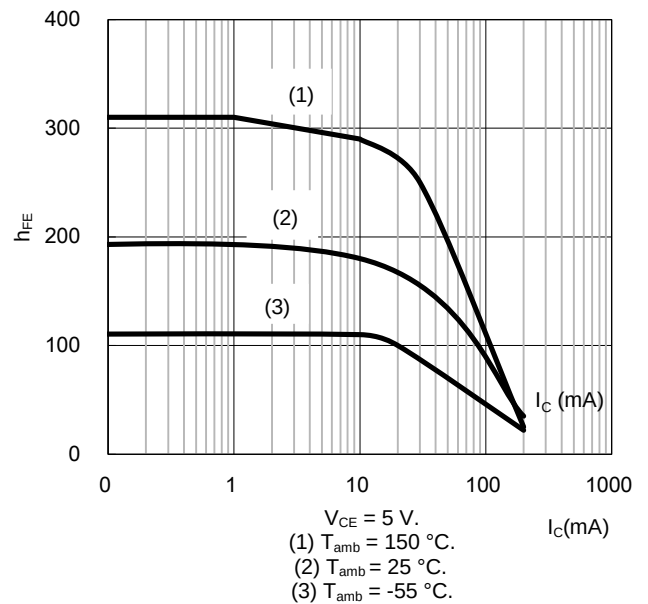


Fig.3 Base-Emitter Saturation Voltage
Collector-Emitter Saturation Voltage


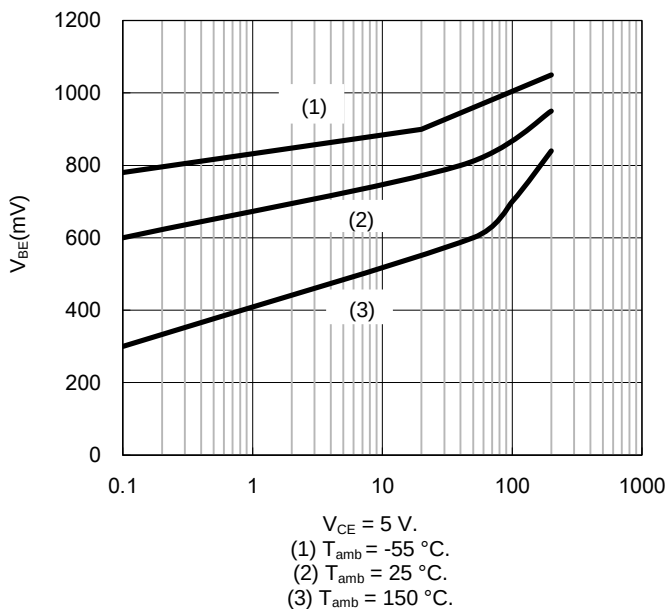


Fig.4 Base-Emitter On Voltage

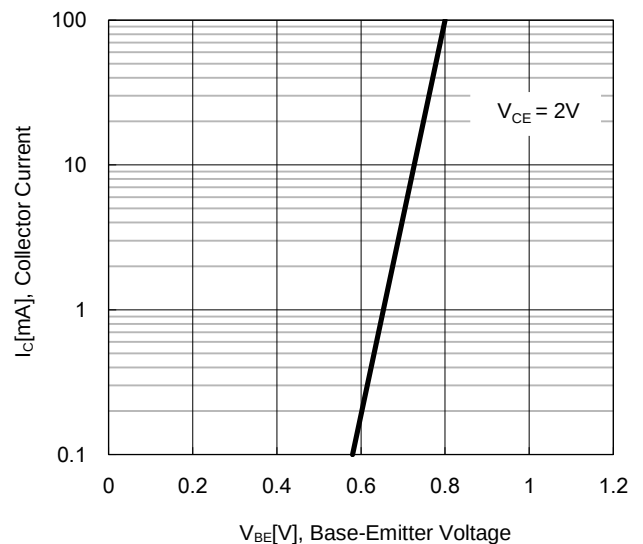

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.5 Collector Output Capacitance



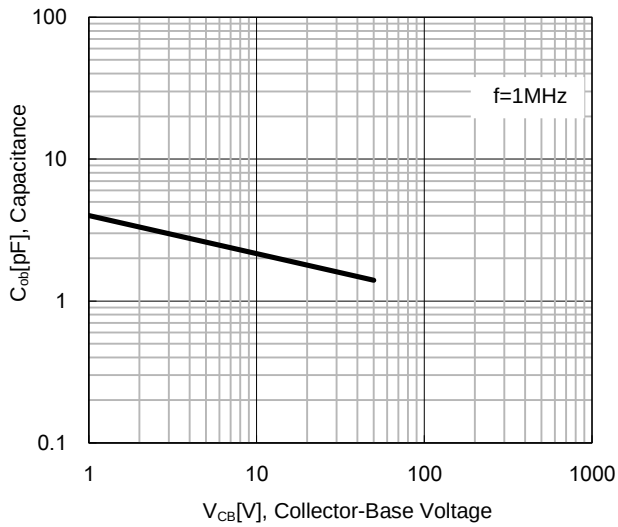


Fig. 6 Current Gain Bandwidth Product

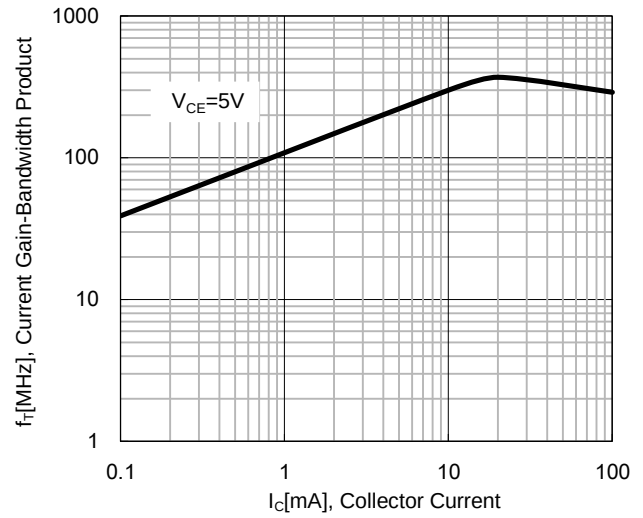


PACKAGE OUTLINE DIMENSION

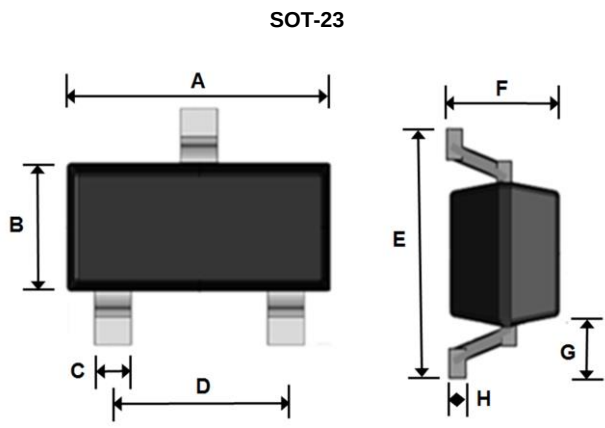

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	2.70	3.10	0.106	0.122
B	1.10	1.50	0.043	0.059
C	0.30	0.51	0.012	0.020
D	1.78	2.04	0.070	0.080
E	2.10	2.64	0.083	0.104
F	0.89	1.30	0.035	0.051
G	0.55 REF		0.022 REF	
H	0.10 REF		0.004 REF	

SUGGEST PAD LAYOUT

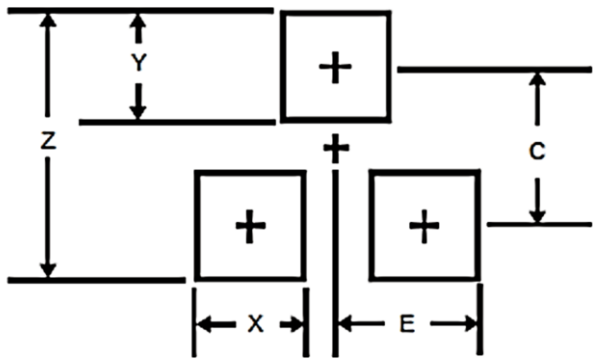

DIM.	Unit(mm)	Unit(inch)
	TYP	TYP
Z	2.90	0.114
X	0.80	0.031
Y	0.90	0.035
C	2.00	0.079
E	1.35	0.053

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.