

Magneto 10 Click



PID: MIKROE-4866

Magneto 10 Click is a compact add-on board that contains a 3D magnetometer. This board features the [MLX90392](#), a +/-5mT range magnetometer for low-noise applications from [Melexis Technologies](#). The MLX90392, specially designed for micropower applications, measures magnetic fields along the three axes (X, Y being in a plane parallel to the surface of the die, and Z being perpendicular to the surface). Those measurements and the MLX90392's temperature are converted into 16-bit words, transferred upon request over I2C communication. This Click board™ is suitable for position sensing requiring a small magnetic range and precise position measurement where noise is a critical design parameter.

Magneto 10 Click is supported by a [mikroSDK](#) compliant library, which includes functions that simplify software development. This [Click board™](#) comes as a fully tested product, ready to be used on a system equipped with the [mikroBUS™](#) socket.

How does it work?

Magneto 10 Click as its foundation uses the MLX90392, a three-axis micropower magnetic field sensor for low-noise applications based on a proprietary Triaxis technology from Melexis Technologies. The MLX90392 comes in a version of a ±5mT full-scale range for leveraging Melexis' patented Triaxis Hall technology to deliver low noise and best-in-class accuracy. It offers a 16-bit output proportional to the magnetic flux density sensed along the XYZ axes and temperature output signal. It also features a Power-Down mode that helps save energy and maximize run-time in battery-powered applications.

Mikroe produces entire development toolchains for all major microcontroller architectures.


Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

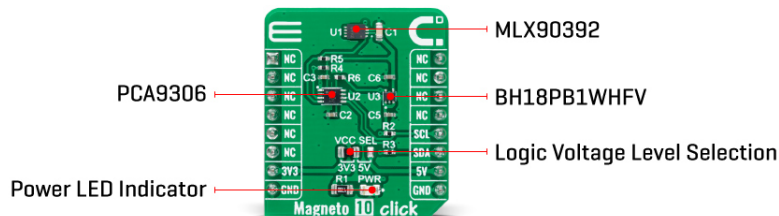

Whereas the $\pm 5\text{mT}$, the MLX90392 includes several operational modes, the sensitivity of $0.15\mu\text{T/LSB}$ and typical RMS noise down to $0.3\mu\text{T}$. By selecting which axes are to be measured, the raw data can be used as input for further post-processing by an external MCU, making the device suitable for position sensing that requires a small magnetic range and precise position measurement where noise is a critical design parameter.

The MLX90392 also requires a supply voltage of 1.8V to work regularly. Therefore, a small LDO regulator, [BH18PB1WHFV](#) from [Rohm Semiconductor](#), provides 1.8V out of mikroBUS™ power rails. This LDO cut power consumption by lowering its current consumption to approximately $2\mu\text{A}$ when the application is operating in the Standby state.

Magneto 10 Click communicates with MCU using a standard I2C 2-Wire interface that supports Standard and Fast Mode Plus operation. Since the sensor for operation requires a 1.8V logic voltage level only, this Click board™ also features the [PCA9306](#) voltage-level translator from [Texas Instruments](#). The I2C interface bus lines are routed to the dual bidirectional voltage-level translator, allowing this Click board™ to work with both 3.3V and 5V MCUs properly.

This Click board™ can operate with both 3.3V and 5V logic voltage levels selected via the VCC SEL jumper. This way, it is allowed for both 3.3V and 5V capable MCUs to use the I2C communication lines properly. However, the Click board™ comes equipped with a library that contains easy-to-use functions and an example code that can be used, as a reference, for further development.

Specifications

Type	Magnetic
Applications	Can be used for position sensing requiring a small magnetic range and precise position measurement where noise is a critical design parameter
On-board modules	MLX90392 - three-axis micropower magnetic field sensor for low-noise applications based on a proprietary Triaxis technology from Melexis Technologies
Key Features	Low power consumption, high precision, Triaxis Hall technology for best-in-class in

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

	noise, integrated temperature sensor, 16-bit digital magnetic and temperature output, selectable operational modes, and more
Interface	I2C
Feature	No ClickID
Compatibility	mikroBUS™
Click board size	S (28.6 x 25.4 mm)
Input Voltage	3.3V or 5V

Pinout diagram

This table shows how the pinout on Magneto 10 Click corresponds to the pinout on the mikroBUS™ socket (the latter shown in the two middle columns).

Notes	Pin					Pin	Notes
	NC	1	AN	PWM	16	NC	
	NC	2	RST	INT	15	NC	
	NC	3	CS	RX	14	NC	
	NC	4	SCK	TX	13	NC	
	NC	5	MISO	SCL	12	SCL	I2C Clock
	NC	6	MOSI	SDA	11	SDA	I2C Data
Power Supply	3.3V	7	3.3V	5V	10	5V	Power Supply
Ground	GND	8	GND	GND	9	GND	Ground

Onboard settings and indicators

Label	Name	Default	Description
LD1	PWR	-	Power LED Indicator
JP1	VCC SEL	-	Logic Level Voltage Selection 3V3/5V: Left position 3V3, Right position 5V

Magneto 10 Click electrical specifications

Description	Min	Typ	Max	Unit
Supply Voltage	3.3	-	5	V
Magnetic Flux Density	-5	-	5	mT
Sensitivity	-	0.15	-	μT/LSB
Resolution	-	16	-	bit
Operating Temperature Range	-40	+25	+85	°C

Software Support

We provide a library for the Magneto 10 Click as well as a demo application (example), developed using MikroElektronika [compilers](#). The demo can run on all the main MikroElektronika [development boards](#).

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

Package can be downloaded/installed directly from NECTO Studio Package Manager(recommended way), downloaded from our [LibStock™](#) or found on [Mikroe github account](#).

Library Description

This library contains API for Magneto 10 Click driver.

Key functions

- `magneto10_get_magnetic_flux` This function reads the raw values of X, Y, and Z axis and converts them to magnetic flux data in microTesla.
- `magneto10_get_temperature` This function reads the raw temperature value and converts it to Celsius.
- `magneto10_set_operating_mode` This function sets the device operating mode.

Example Description

This example demonstrates the use of Magneto 10 Click board™.

The full application code, and ready to use projects can be installed directly from NECTO Studio Package Manager(recommended way), downloaded from our [LibStock™](#) or found on [Mikroe github account](#).

Other Mikroe Libraries used in the example:

- MikroSDK.Board
- MikroSDK.Log
- Click.Magneto10

Additional notes and informations

Depending on the development board you are using, you may need [USB UART click](#), [USB UART 2 Click](#) or [RS232 Click](#) to connect to your PC, for development systems with no UART to USB interface available on the board. UART terminal is available in all MikroElektronika [compilers](#).

mikroSDK

This Click board™ is supported with [mikroSDK](#) - MikroElektronika Software Development Kit. To ensure proper operation of mikroSDK compliant Click board™ demo applications, mikroSDK should be downloaded from the [LibStock](#) and installed for the compiler you are using.

For more information about mikroSDK, visit the [official page](#).

Resources

[mikroBUS™](#)

[mikroSDK](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).

[Click board™ Catalog](#)

[Click boards™](#)

Downloads

[Magneto 10 click schematic](#)

[MLX90392 datasheet](#)

[Magneto 10 click 2D and 3D files](#)

[Magneto 10 click example on Libstock](#)

[BH18PB1WHFV datasheet](#)

[PCA9306 datasheet](#)

Mikroe produces entire development toolchains for all major microcontroller architectures.

Committed to excellency, we are dedicated to helping engineers bring the project development up to speed and achieve outstanding results.



ISO 27001: 2013 certification of informational security management system.
ISO 14001: 2015 certification of environmental management system.
OHSAS 18001: 2008 certification of occupational health and safety management system.



ISO 9001: 2015 certification of quality management system (QMS).