




Part Number : 530480650
Product Description : 1.25mm Pitch, PicoBlade PCB Header, Single Row, Right-Angle, Through Hole, Gold (Au) Plating, Friction Lock, 6 Circuits, Tray, 2.30mm PC Tail Length
Series Number : 53048
Status : New Business Not Supported
Product Category : PCB Headers and Receptacles

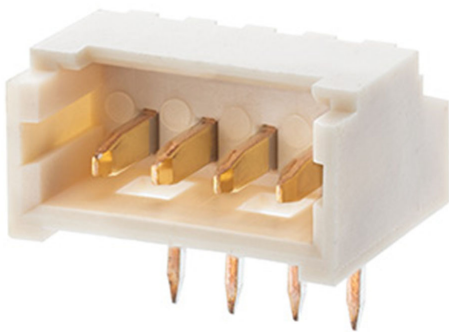

Documents & Resources

Product Environment Compliance

Compliance

GADSL/IMDS	Compliant with Exemption 33; 44; 34
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Not Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)8585-DC (23 Jan 2024)
EU RoHS	Compliant per EU 2015/863

Multiple Part Product Compliance Statements

- Eu RoHS
- REACH SVHC
- Low-Halogen

Multiple Part Industry Compliance Documents

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

EU RoHS Certificate of Compliance

Part Details

General

Status	New Business Not Supported
Category	PCB Headers and Receptacles
Series	53048
Description	1.25mm Pitch, PicoBlade PCB Header, Single Row, Right-Angle, Through Hole, Gold (Au) Plating, Friction Lock, 6 Circuits, Tray, 2.30mm PC Tail Length
Application	Signal, Wire-to-Board
Component Type	PCB Header
Product Family	PicoBlade Connector System
Product Name	PicoBlade
UPC	191128466608

Agency

UL	E29179
----	--------

Electrical

Current - Maximum per Contact	1.0A
Voltage - Maximum	125V AC (RMS)/DC

Physical

Breakaway	No
Circuits (Loaded)	6
Circuits (maximum)	6
Color - Resin	Natural
Durability (mating cycles max)	30
First Mate / Last Break	No
Glow-Wire Capable	No
Guide to Mating Part	No
Keying to Mating Part	None
Lock to Mating Part	Yes
Mated Height	3.50mm
Material - Metal	Phosphor Bronze

Material - Plating Mating	Gold
Material - Plating Termination	Matte Tin
Material - Resin	Polyamide
Net Weight	154.293/mg
Number of Rows	1
Orientation	Right Angle
Packaging Type	Tray
PC Tail Length	2.30mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	0.80mm
Pitch - Mating Interface	1.25mm
Plating min - Mating	0.380µm
Plating min - Termination	1.000µm
Shrouded	Fully
Stackable	No
Temperature Range - Operating	-40° to +105°C
Termination Interface Style	Through Hole

This document was generated on Mar 26, 2024