MICRO SWITCH
A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR COMPANY
FREEPORT, ILLINOIS
FED. MFR. CODE 91929

SWITCH-ENCLOSED

CATALOG LISTING
OPH-AR5

OPH-AR5 | REPLACES | RELEASE NO. SR 8924 | DRAWING NUMBER M | ISSUE X1 X2 X3 X4 X5

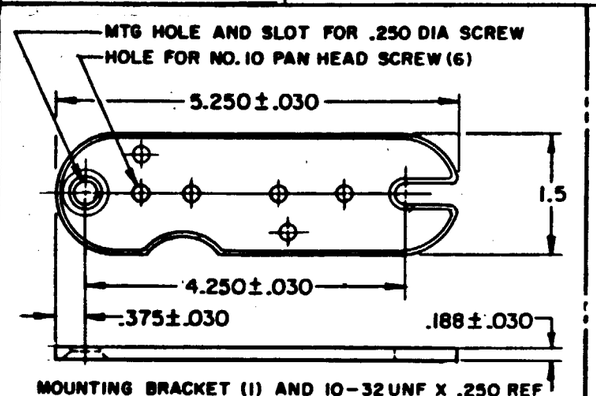

MOUNTING BRACKET (1) AND 10-32 UNF X .250 REF PAN HEAD SCREW (2) FURNISHED UNASSEMBLED
SCALE - HALF SIZE

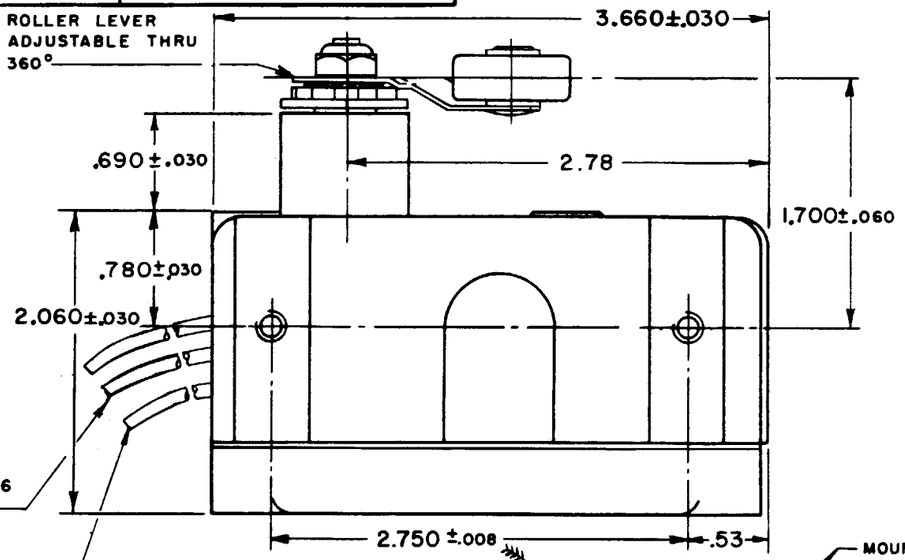

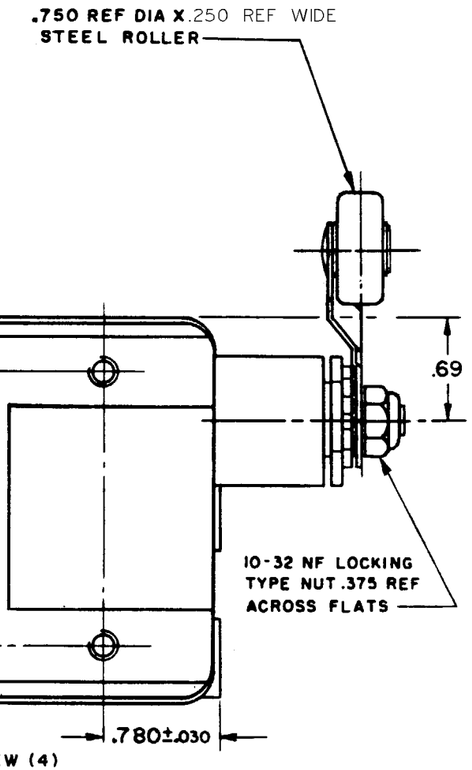

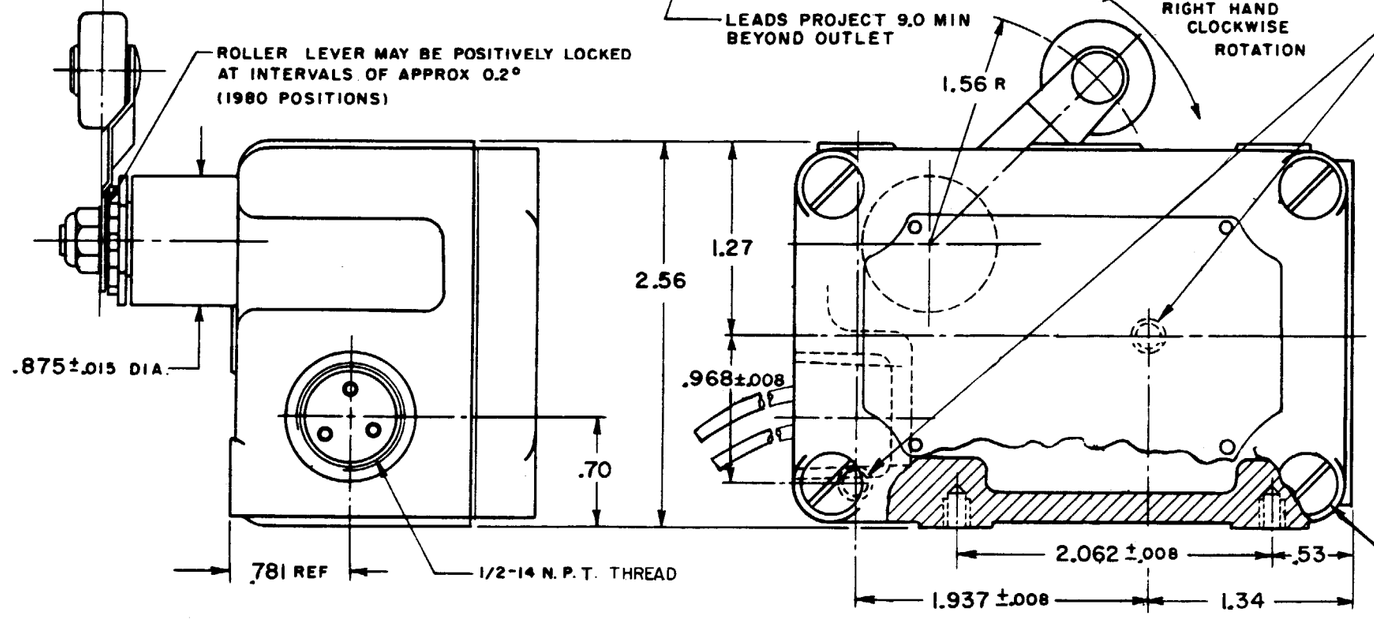

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF MINNEAPOLIS-HONEYWELL REGULATOR CO. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

CHARACTERISTICS	ELECTRICAL DATA
OPERATING FORCE ——— 8-24 OZ	CONTACT ARRANGEMENT: S P D T
RELEASE FORCE ——— 4 OZ MIN	
PRETRAVEL ——— 8° (.219 MAX)	
DIFFERENTIAL TRAVEL ——— .025 MAX	
DO NOT OVERTRAVEL MORE THAN 25°	
SWITCH-BASIC REPLACEMENT-4HS201-118	

SCALE FULL
DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ARE:

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.008
ANGLES		±

WEIGHT

NOTE-
1 - MOUNTING SCREW HOLE, 10-32 NF-2B THREADS X .219 REF DEEP. (8)

2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE
3 - LEADS APPROPRIATELY MARKED FOR CIRCUIT IDENTIFICATION

REVISIONS

A	C015081	M B F 1 SEP 60		DRAW 15 APR 60
B	C018276	RES 22 JUNE 64		CHECK
C	C019878	M B F 4 NOV 66		DES 15 APR 60
D	C026103	D L F 21 JUL 69		CHECK
E	C027860	M B S 5 FEB 71		
F	C055031J	JAS 26 APR 85		CHECK
G	C073344	G J W 17 OCT 92		
H	CO 81637	GLH 3 APR 98		

DRAWN M B F 15 APRIL 60

FO-50378.003

Downloaded from Arrow.com.