



Data Sheet | Item Number: 289-725

Interface module; with solder pin; Female connector; 9-pole; Double-deck PCB terminal blocks; in mounting carrier; Mating connector for solder connection; 2,50 mm²

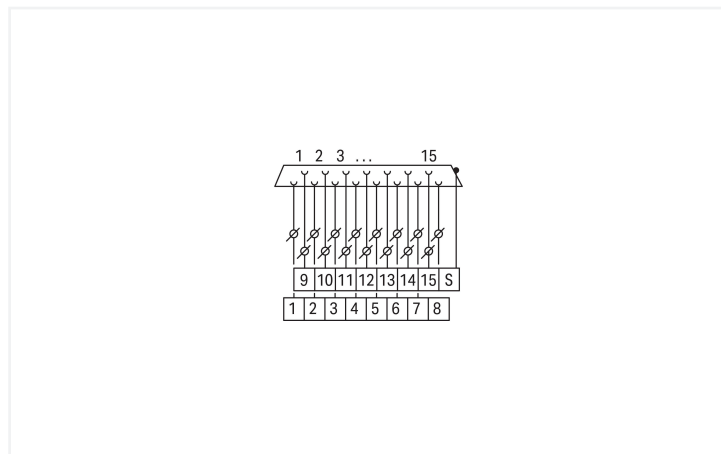

<https://www.wago.com/289-725>

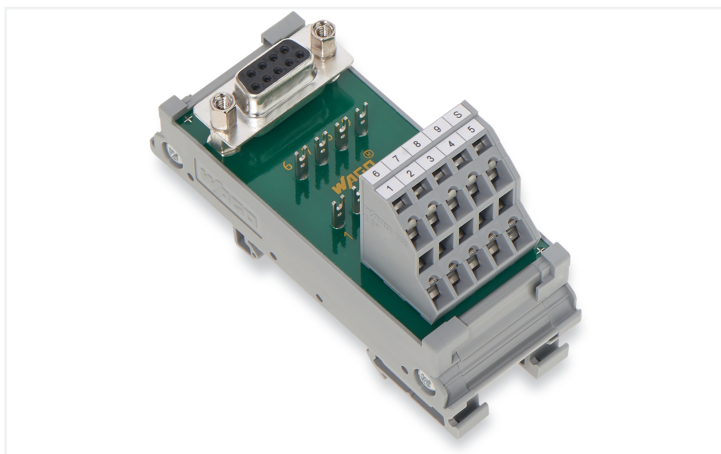

Notes

Safety Information **Notice!** Accessible live parts! Protection against accidental contact must be provided by the system installer, e.g., using a WAGO 709 Series Cover (see "Accessories") or a similar cover. The installation guidelines must be followed for each specific application.

Note One solder terminal per pole is available for testing and patching (except for shield contact).

Electrical data

Operating voltage	≤ 30 VAC; ≤ 50 VDC
Nominal current	2 A
Contact resistance (max.)	30 mΩ
Specialty functions	With solder pin With shield connection

Safety and protection

Rated Voltage	50 V
Pollution degree	2
Protection type	IP00
Dielectric strength (channel/channel) (AC, 1 min.)	1.3 kVrms
Insulation type	Functional insulation

Connection Data

Performance level	2 / 200 mating cycles	Connection 1	
Strain relief	UNC 4-40 stud bolt	Pluggable connector	D-subminiature female connector
		Pole number 1	9
		Connection type	System
		Note (conductor cross-section)	12 AWG: THHN, THWN
		Mating direction	vertical

Connection 2

Design	PCB terminal blocks (double-deck)
Pole number	10
Connection type	Field
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 736 Series
Solid conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm ² / 28 ... 12 AWG
Strip length	5 ... 6 mm / 0.2 ... 0.24 inches

Physical data

Width	33.5 mm / 1.319 inches
Height	85 mm / 3.346 inches
Depth from upper-edge of DIN-rail	48 mm / 1.89 inches

Mechanical data

Mounting type	DIN-35 rail
Housing design	Mounting carrier

Material data

Contact material (connector)	Au over Ni
Fire load	0.536 MJ
Weight	50.9 g

Environmental requirements

Ambient temperature (operation)	-20 ... +50 °C
Ambient temperature (storage)	-40 ... +70 °C
Relative humidity	≤ 85 % (non-condensing)

Standards and Specifications

Standards/specifications	EN 61010-2-201
--------------------------	----------------

Commercial data

Product Group	6 (INTERFACE ELECTRONIC)
PU (SPU)	8 (1) pcs
Packaging type	Box
Country of origin	DE
GTIN	4045454371227
Customs tariff number	85366990990



Product Classification

UNSPSC	39121421
eCl@ss 10.0	27-14-11-52
eCl@ss 9.0	27-14-11-52
ETIM 9.0	EC002780
ETIM 10.0	EC002780
ECCN	NO US CLASSIFICATION

Environmental Product Compliance

RoHS Compliance Status	Compliant,With Exemption
RoHS Exemption	6(c) 7(a) 7(c)-I 7(c)-II
SCIP notification number (Austria)	a1c979d0-7c2c-4a0a-9a12-e7de467e4d80
SCIP notification number (Belgium)	73a3e206-15bc-4ec0-ab0e-676e8c2c9f32
SCIP notification number (Bulgaria)	16be40d4-c9cf-4b86-a737-4b7774a8026c
SCIP notification number (Czech Republic)	893ceba5-bede-4281-b096-858f1302c88e
SCIP notification number (Denmark)	95219cac-224e-4002-bc18-e86800609176
SCIP notification number (Finland)	bac88b6b-f458-405f-9ee2-e8415f7d00ae
SCIP notification number (France)	23c555c5-d4b4-461a-9e14-7d5268768377
SCIP notification number (Germany)	a799dc4c-a9dd-4f40-a998-48918b8b4411
SCIP notification number (Hungary)	f18314c4-adc0-464b-9475-67cc096446eb
SCIP notification number (Italy)	1c34d755-b188-452c-9a33-2eae8a52ac64
SCIP notification number (Netherlands)	fc83c792-aad5-42cc-bf5b-abc18fe536cf
SCIP notification number (Poland)	e77e6278-1e75-47e2-becc-1f5e5cf2d60c
SCIP notification number (Romania)	5739de6d-e3a8-4afa-a24d-09260754f306
SCIP notification number (Sweden)	6385a8bd-0ba7-48b3-83cc-d6684e57e41e

Downloads

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 289-725	
--	--

Documentation





Bid Text

289-725	19.02.2019	xml 3.70 KB	
289-725	09.02.2015	doc 27.00 KB	

Instruction Leaflet

Operation and Assembly Instructions Interface	V 1.0.0 02.04.2025	pdf 1246.19 KB	
---	-----------------------	-------------------	--

CAD/CAE-Data

CAD data	CAE data
2D/3D Models 289-725 	EPLAN Data Portal 289-725 
	WSCAD Universe 289-725 
	ZUKEN Portal 289-725 

1 Compatible Products

1.1 Optional Accessories

1.1.1 Installation

1.1.1.1 Cover



Item No.: 709-153

Cover; Type 1; suitable for cover carrier, type 1; 1 m long; transparent

1.1.1.2 Cover carrier



Item No.: 709-167

Cover carrier; Type 1; incl. fixing/retaining screws and knurled nut; suitable for 279 to 282 and 880 Series rail-mounted terminal blocks; suitable for 264 Series miniature rail-mounted terminal blocks; suitable for 270 Series sensor and actuator terminal blocks; gray

1.1.2 Marking

1.1.2.1 Marking strip



Item No.: 709-196

Marking strips; for laser printer; translucent



Item No.: 709-177

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; translucent



Item No.: 709-178

Marking strips; on reel; 7.5 mm wide; not stretchable; plain; snap-on type; white

1.1.3 Tool

1.1.3.1 Operating tool




Item No.: 210-720


Operating tool; Blade: 3.5 x 0.5 mm; with a partially insulated shaft; multicoloured

Installation Notes

Conductor termination




Conductor termination – screwdriver actuation parallel to conductor entry




Conductor termination – screwdriver actuation perpendicular to conductor entry

Installation



Snapping a module onto DIN-rail.



Removing a module from the DIN-rail.