


PRELIMINARY

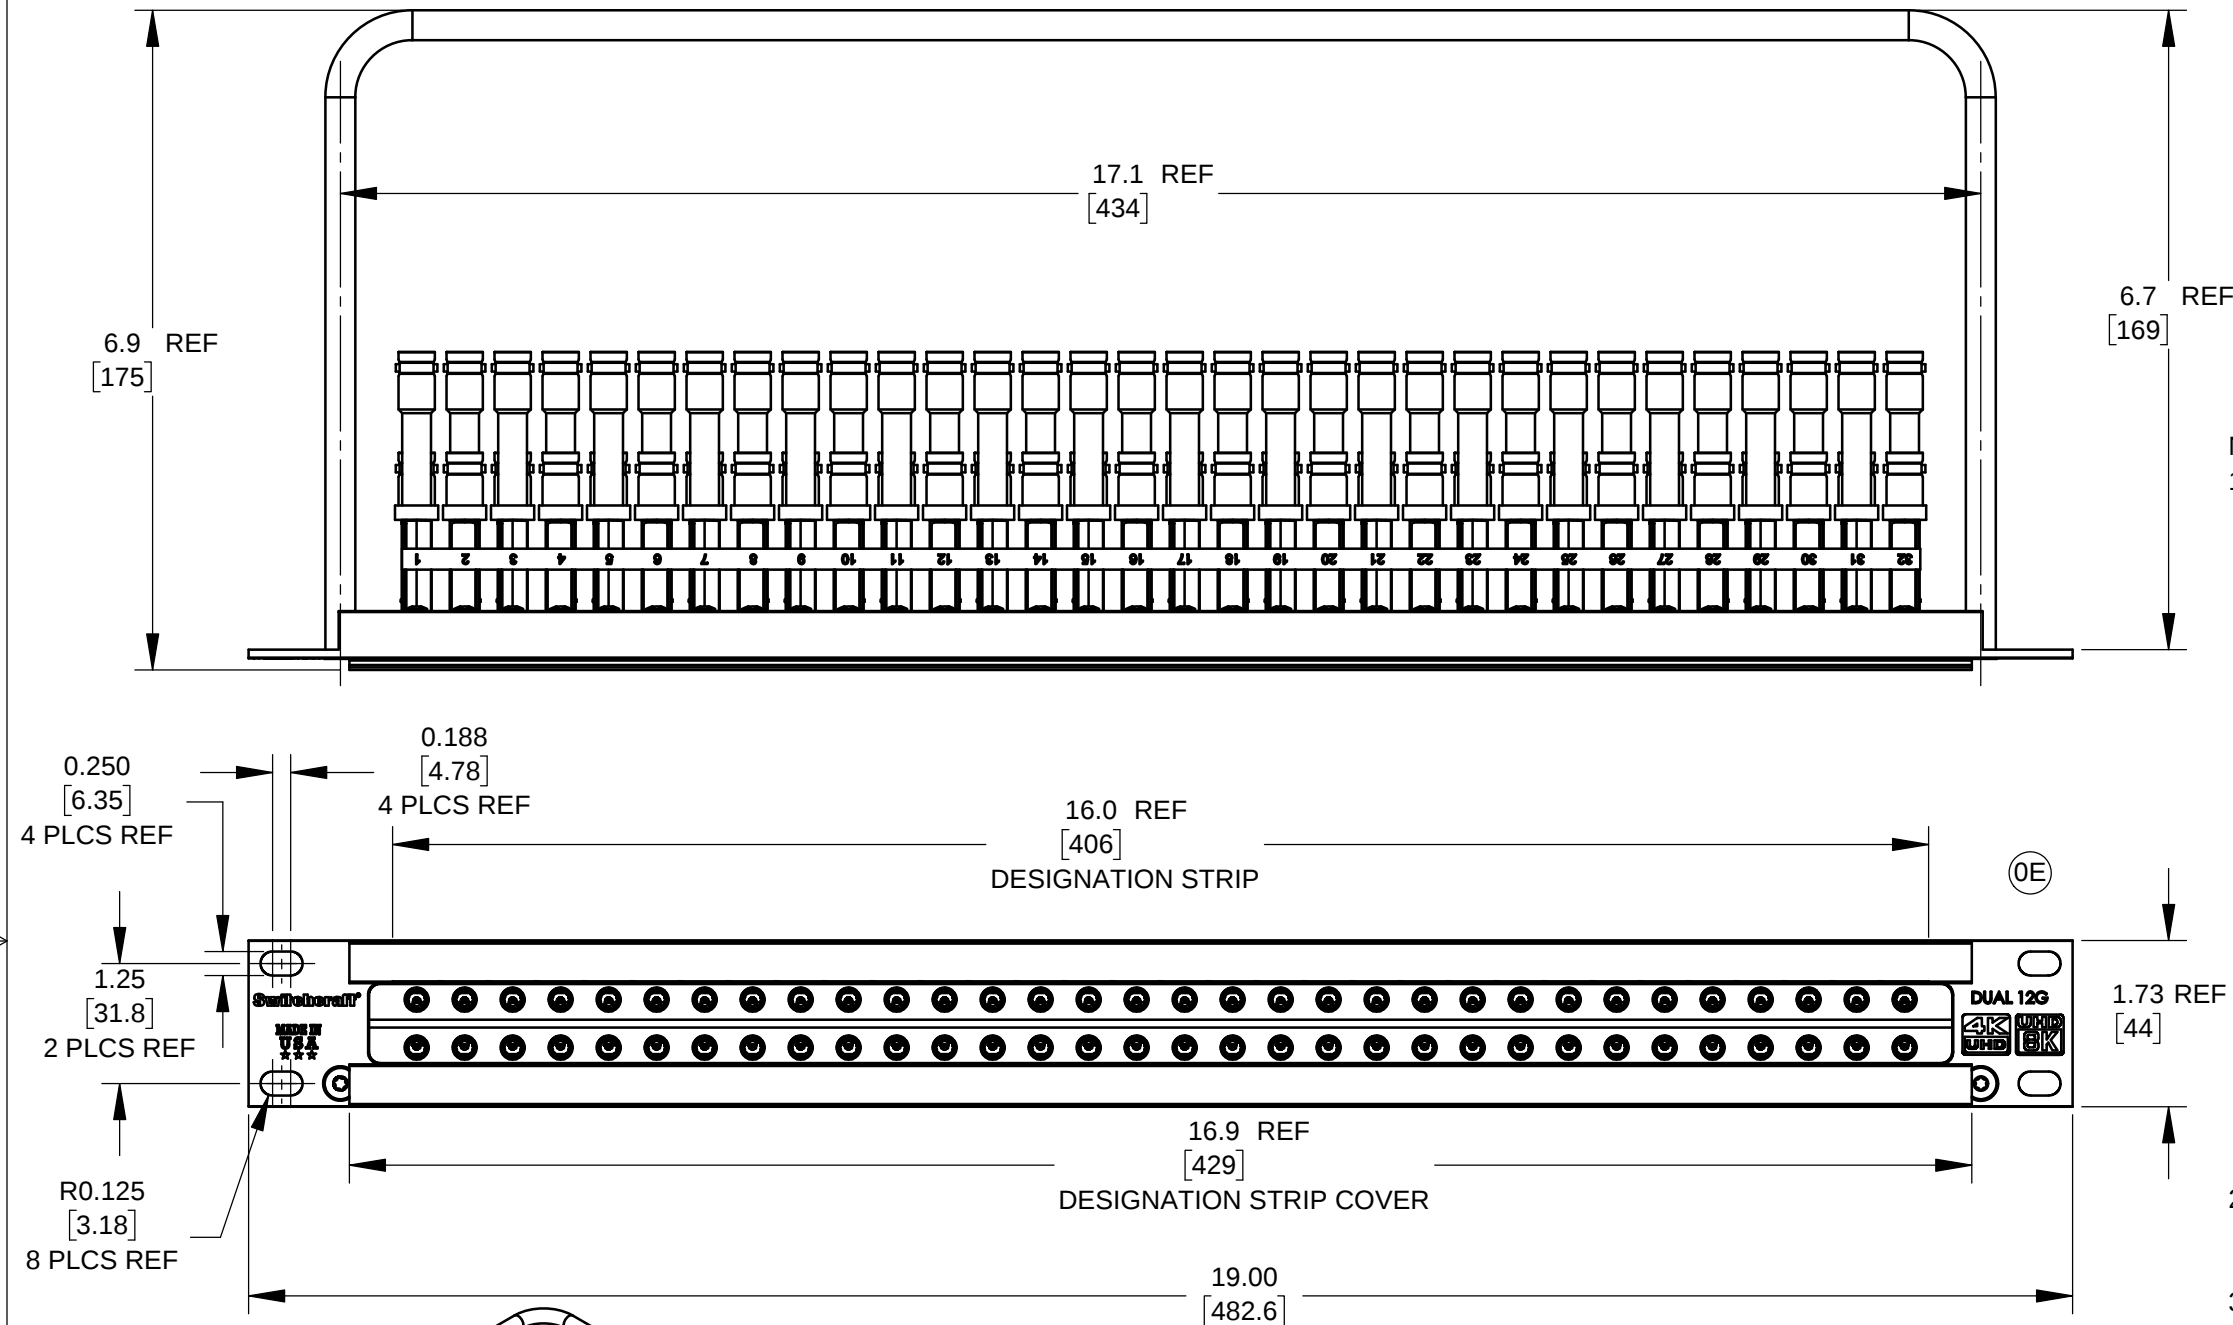

- NOTES:
- SPECIFICATIONS:
 - ELECTRICAL:
 - MEETS SMPTE 2082-1
 - CHARACTERISTIC IMPEDANCE: 75 OHMS
 - CONTACT RESISTANCE: LESS THAN 50 MILLIOHMS
 - INTERFACE:
 - MATING PLUG: 0.175 OUTSIDE DIAMETER
 - CENTER CONDUCTOR: ACCEPTS 0.029 PIN DIAMETER
 - MECHANICAL:
 - VIBRATION: PER MIL - STD 202, METHOD 201
 - INSERTION FORCE: 9 LBS MAX.
 - WITHDRAWAL FORCE: 2 LBS MIN.
 - LIFE CYCLE: 20,000 TYP
 - ENVIRONMENTAL:
 - TEMPERATURE
 - OPERATING: -40 °C TO 65 °C
 - STORAGE: -40 °C TO 65 °C
 - THERMAL SHOCK: PER MIL-STD- 202, METHOD 107
 - MOISTURE AND HUMIDITY: PER MIL-STD- 202, METHOD 106
 - SALT SPRAY: PER MIL-STD- 202, METHOD 101
 - USE UHDBNC94 (4594R CABLE) AND VMMPUHD PATCHCORDS OR VMMLPUHD LOOPING PLUGS TO MEET SMPTE 2082-1.
 - THIS PRODUCT IS RoHS COMPLIANT.

CUSTOMER DRAWING

PART NUMBER	DESCRIPTION	REVISION
MMVPB32K175T	NORMAL-TERMINATED	0E
MMVPB32K1NNT	NON-NORMAL-NON-TERMINATED	0E

REV	ECO NUMBER	DATE	BY	APVD
0E	UPDATE LASER ETCH	12-13-19	SRC	SRC
0D	UPDATED TO MATCH ASSEM REV	11-22-19	SRC	SRC
0C	UPDATED & DUAL DIMENSIONED	3-1-19	SRC	SRC
0B	ADDED REAR LABEL	1-23-19	SRC	SRC
REVISIONS				

☆ STAR SYMBOL DENOTES CRITICAL DIMENSION
UNLESS OTHERWISE SPECIFIED
1. ALL DIMENSIONS IN INCHES
- TWO PLACE DECIMALS ±0.01
- THREE PLACE DECIMALS ±0.005
- ANGLES ±1°
- ALL DIA. CONCENTRIC WITHIN 0.005 T.I.R.
2. FEATURES ON THE SAME CENTERLINE MUST BE ALIGNED WITHIN ±0.002
3. REMOVE ALL BURRS
DO NOT SCALE DRAWING

THIS DRAWING DESCRIBES A DESIGN CONSIDERED PROPRIETARY IN NATURE, DEVELOPED AND MANUFACTURED BY SWITCHCRAFT INC. AND IS RELEASED ON A CONFIDENTIAL BASIS FOR IDENTIFICATION PURPOSES ONLY.									
SIZE		WIDTH		MULT		LBS/M		TEMPER	
FINISH					MATERIAL				
SPEC No.					SPEC No.				
FIRST USED ON				SCALE		Switchcraft®			
				1:2					
DATE DRAWN		BY	CHKD		APVD		SHEET 1 OF 1		
1-11-19		SRC	1-11-19		*				
			SRC		*				
NAME					PART No.				REV
MICRO-BNC-REAR					MMVPB32K1_SERIES				0E
PATCHBAYS									