
Part Number : 764501627
Product Description : Impact 100 Ohm 2 Pair Right-Angle Male Header, Unguided, Dual Endwall, 16 Columns, 96 Circuits, Pin Length 4.90mm, Plated Through Hole Dimension 0.39mm, Lead Free
Series Number : 76450
Status : Active
Product Category : Backplane Connectors

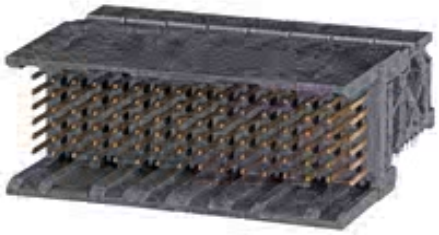

Documents and Resources

Drawings

764501627_sd.pdf

PK-70873-077-001.pdf

3D Models and Design Files

STEP AP242

SOLIDWORKS

Creo

SYM-76450-1608-001.zip

EE-76450-002-001.pdf

EE-76450-50G-001.pdf

SP-76450-002-001.zip

SP-76450-50G-001.zip

Specifications

AS-76060-990-001.pdf

AS-76060-9999-001.pdf

PS-45499-002-001.pdf

PS-76060-999-001.pdf

Product Environment Compliance

Compliance

GADSL/IMDS	Not Relevant
China RoHS	per SJ/T 11365-2006
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21

Downloaded from Arrow.com.

REACH SVHC	Not Contained per D(2025)7771-DC (04 Feb 2026)
EU RoHS	Compliant per EU 2015/863

Compliance Statements
- EU RoHS
- REACH SVHC
- Low-Halogen

Industry Documents
- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

Substances of Interest
- PFAS

EU RoHS Certificate of Compliance

Additional Product Compliance Information

Part Details

General

Status	Active
Category	Backplane Connectors
Series	76450
Description	Impact 100 Ohm 2 Pair Right-Angle Male Header, Unguided, Dual Endwall, 16 Columns, 96 Circuits, Pin Length 4.90mm, Plated Through Hole Dimension 0.39mm, Lead Free
Application	Orthogonal Direct
Component Type	PCB Header
Product Name	Impact
UPC	887191898711

Agency

UL	E29179

Downloaded from Arrow.com.

Electrical

Current - Maximum per Contact	0.75A
Data Rate	25.0 Gbps
Impedance	100Ω
Shielded	No
Shield Type	N/A
Voltage - Maximum	30V AC (RMS)/DC

Physical

Circuits (Loaded)	96
Circuits (maximum)	96
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	No
Material - Metal	High Performance Alloy (HPA)
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	17.118/g
Number of Columns	16
Number of Pairs	2
Number of Rows	6
Orientation	Vertical
Packaging Type	Tray
PCB Locator	No
PCB Retention	No
PCB Thickness - Recommended	1.00mm
PC Tail Length	1.40mm
Pitch - Mating Interface	1.90mm
Pitch - Termination Interface	1.90mm
Plating min - Mating	0.762µm
Polarized to PCB	No

Downloaded from Arrow.com.

Stackable	No
Temperature Range - Operating	-55° to +85°C
Termination Interface Style	Through Hole - Compliant Pin

Solder Process Data

Lead-Free Process Capability	N/A

Mates With / Use With

Mates with Part(s)

Description	Part Number
Impact 100 Ohm 2 Pair Right-Angle Daughtercard Receptacles	76460

Application Tooling

Downloaded from Arrow.com.