
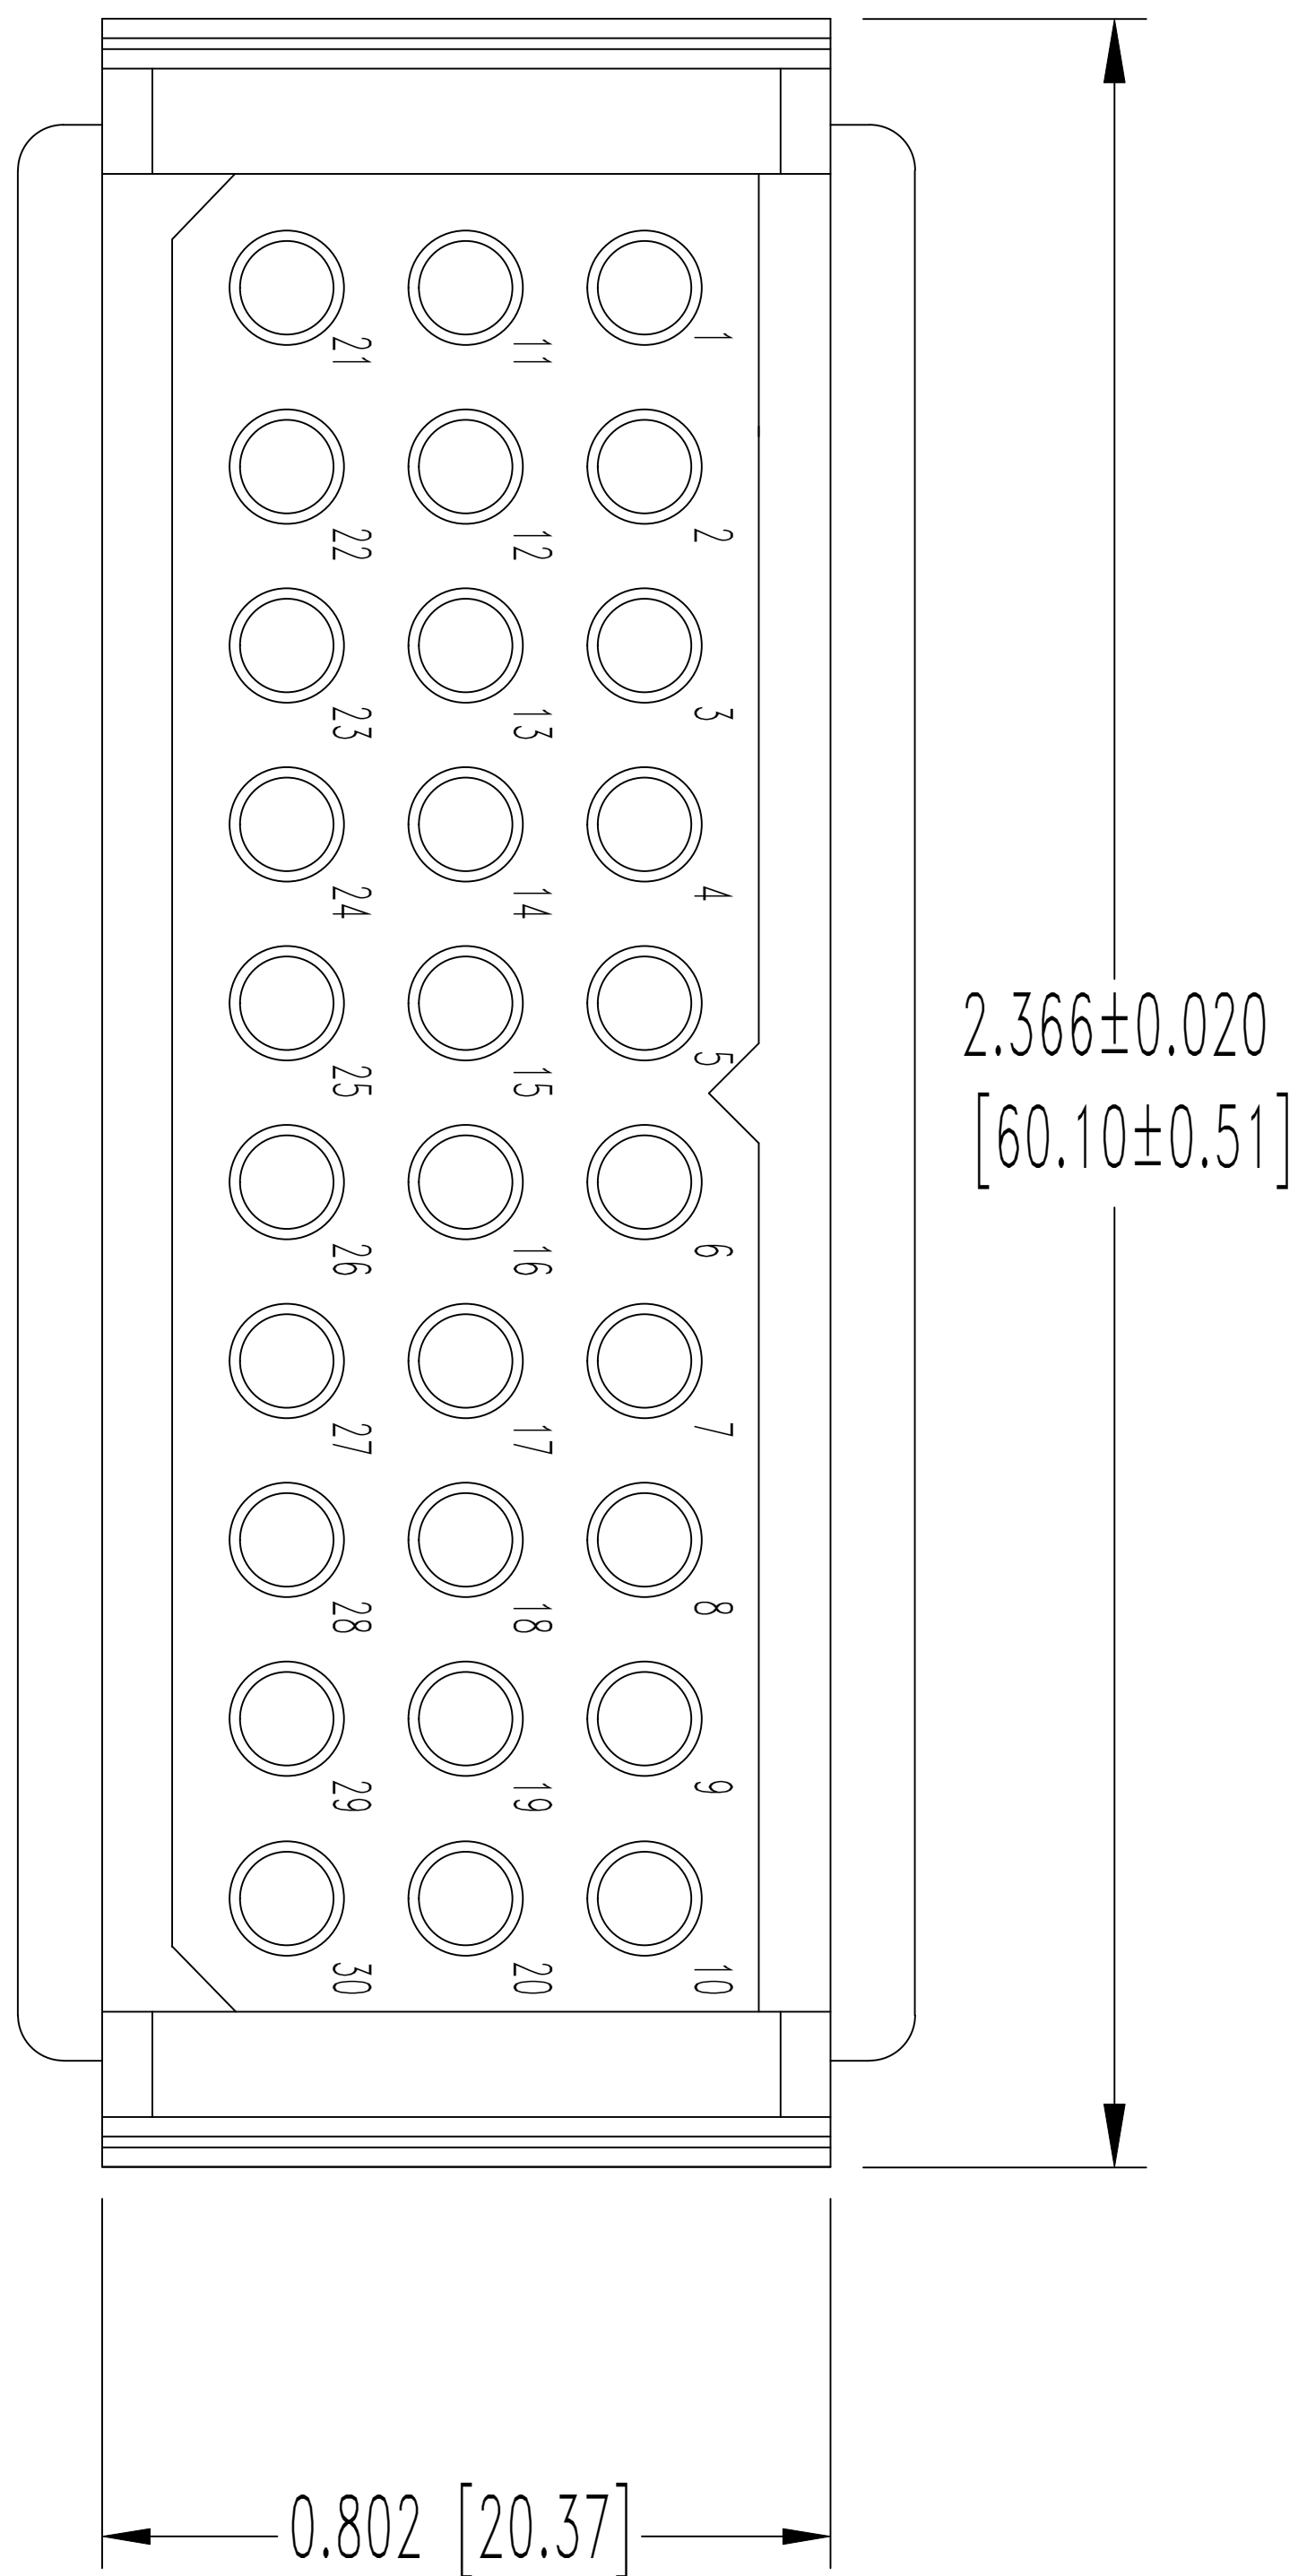
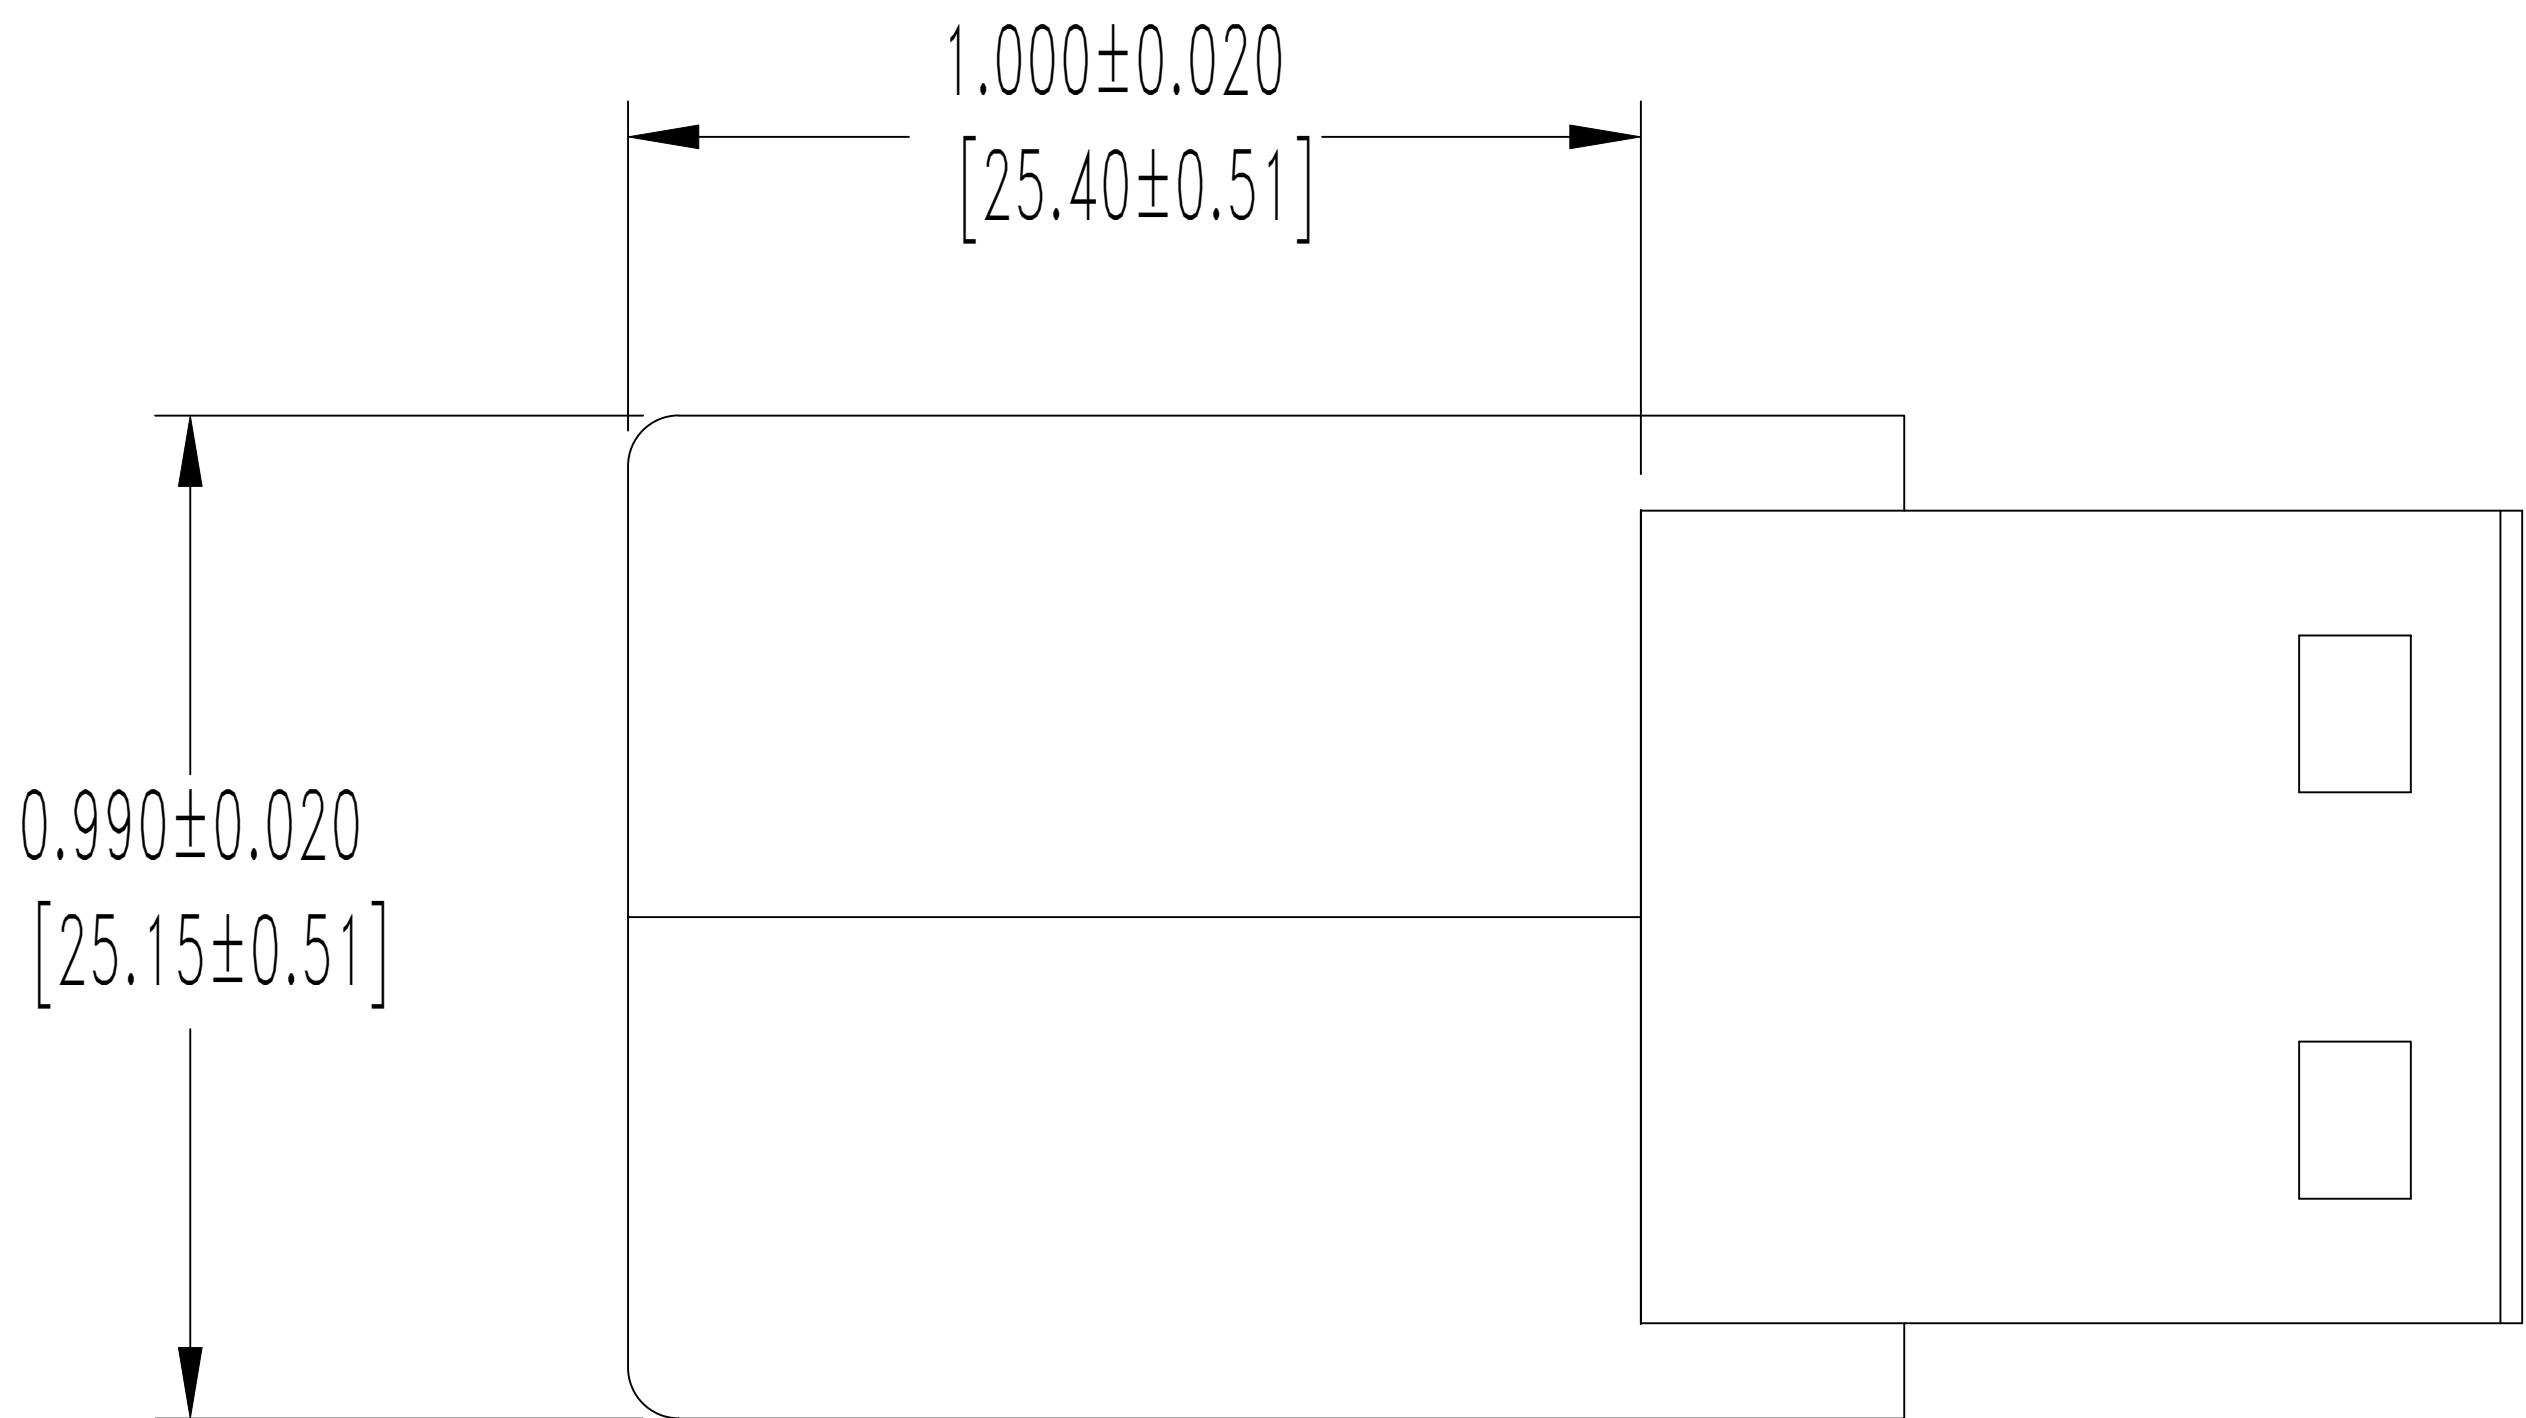


SK8948

DATE	REV	REVISION RECORD	APP	DR	CK
9-19-07	NC	ECO 28457	RCW	YK	COLE

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

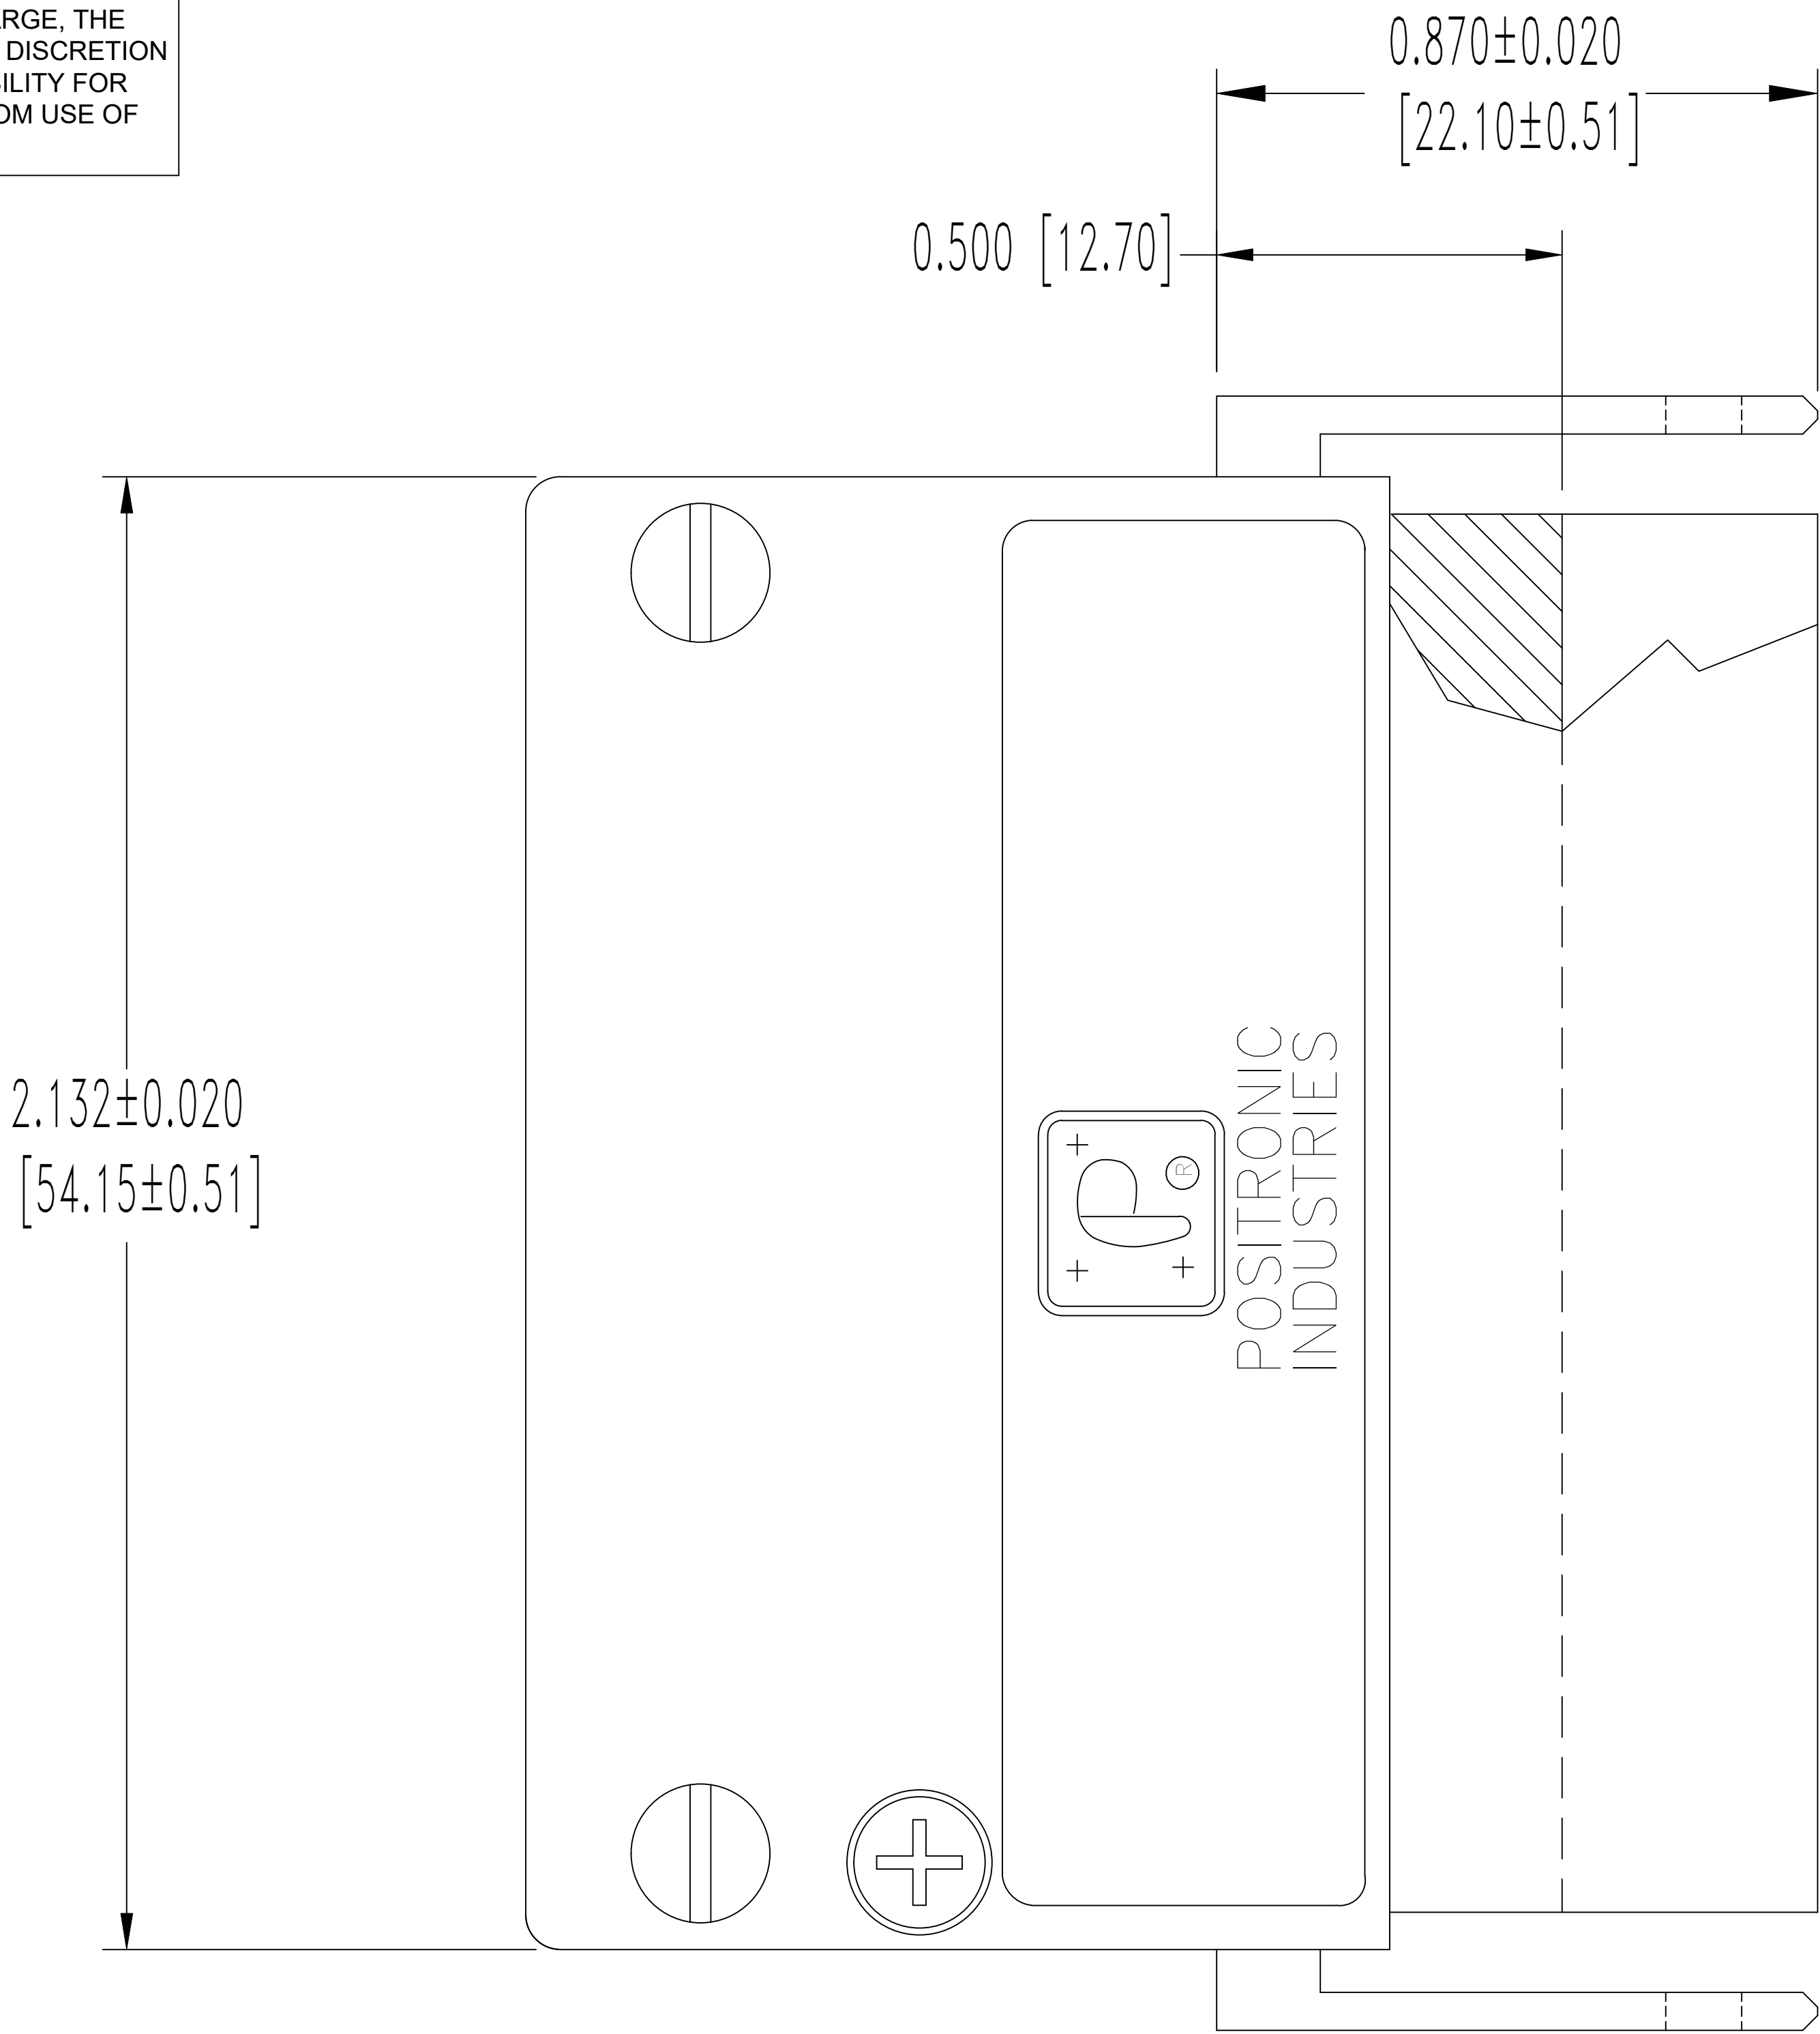

NOTES:

1. MATERIALS AND FINISHES:

INSULATOR: GLASS-FILLED POLYESTER, UL 94V-0, BLUE COLOR.

HOOD: GLASS FILLED POLYESTER, UL 94 V-0, COLOR BLUE.

HOOD SCREWS: STEEL, ZINC PLATE WITH CHROMATE SEAL.

CABLE CLAMPS: STEEL, NICKEL PLATE.

CABLE CLAMP SCREWS: STEEL, ZINC PLATE WITH CHROMATE SEAL.


2. ELECTRICAL CHARACTERISTICS:

INSULATION RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.

WORKING VOLTAGE: 600 VAC.


3. WORKING TEMPERATURE: -55°C TO +125°C.

4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

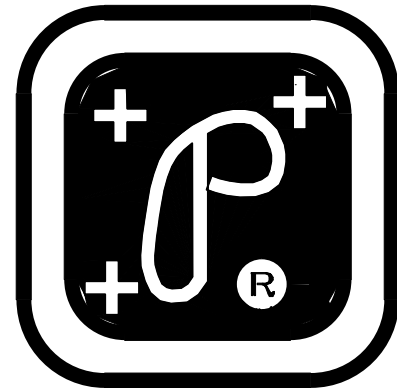

POSITRONIC
INDUSTRIES INC.

SPRINGFIELD, MISSOURI 65801

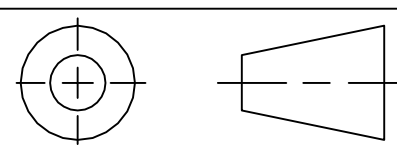

DECIMAL TOL.
 ± 0.015 [0.38]

ANGULAR TOL.
 $\pm 5^\circ$

PCS SERIES

SCALE
N.T.S.

DRAWN BY
YK
APPROVED BY
RCW

TITLE

PLC30M0050

DATE
9-19-07

DRAWING NUMBER
SK8948

REV.
NC