
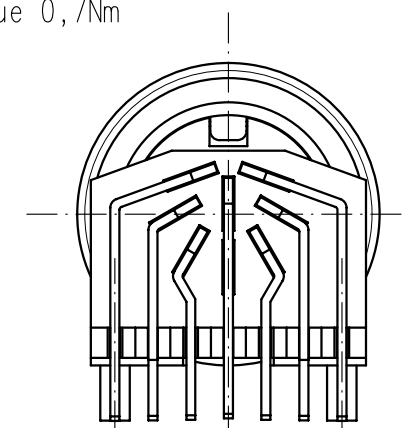
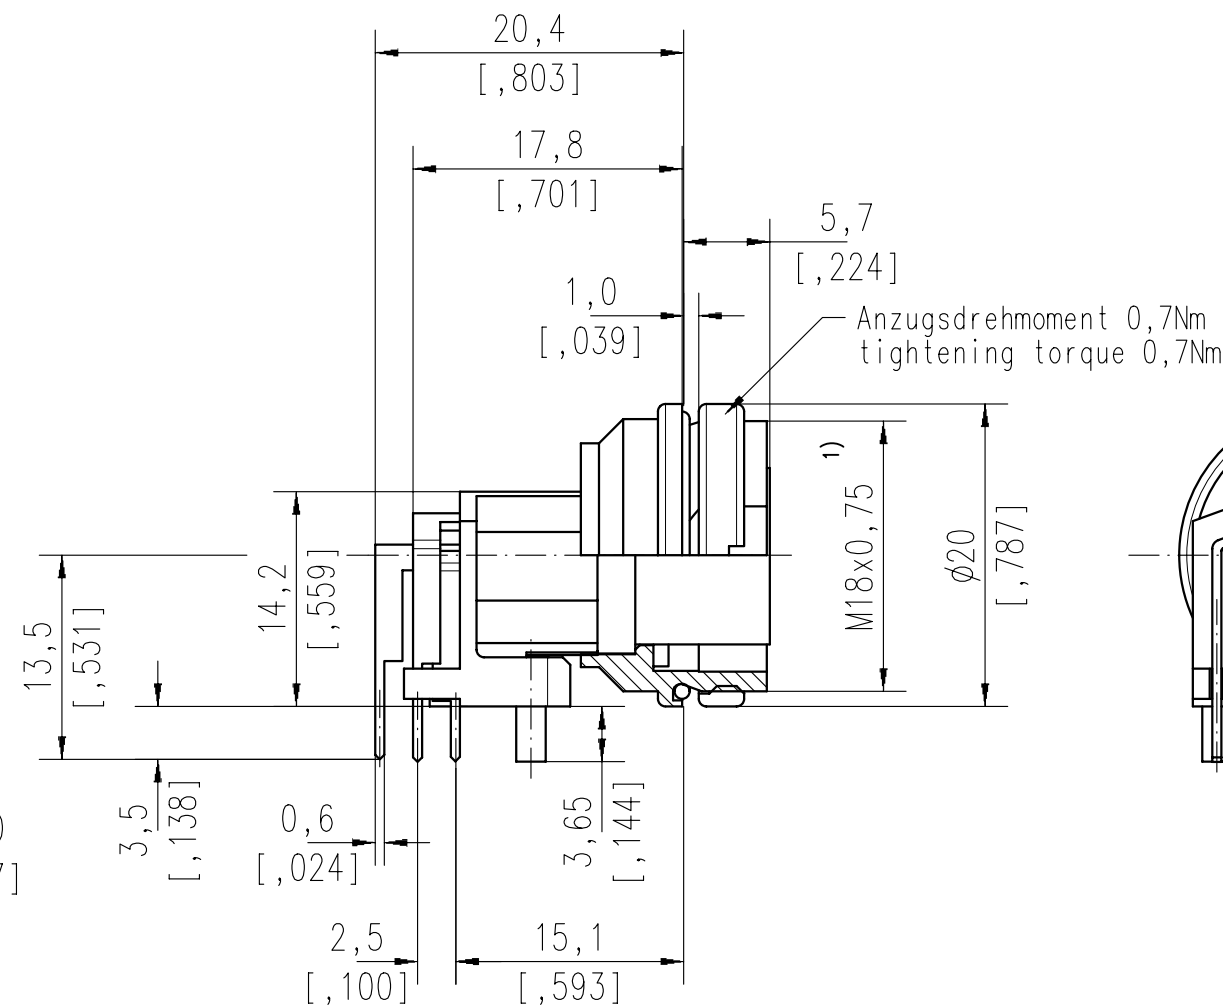
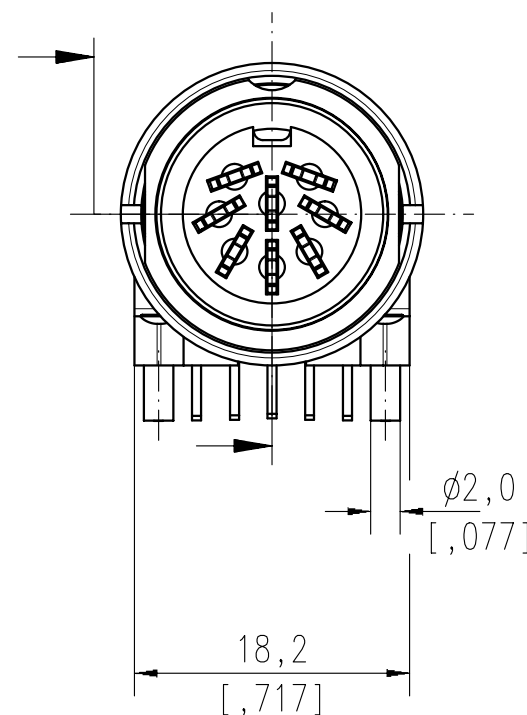



Copying of this document and giving it to others and the use or communication of the contents thereof, are forbidden without express authority. Offenders are liable to the payment of damages. All rights are reserved in the event of the grant of a patent or the registration of the utility model or design.

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich zugestanden. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten.

Lochbild für Leiterplatte
auf Bestückungsseite gesehen
hole pattern on PCB
seeing on assembly side

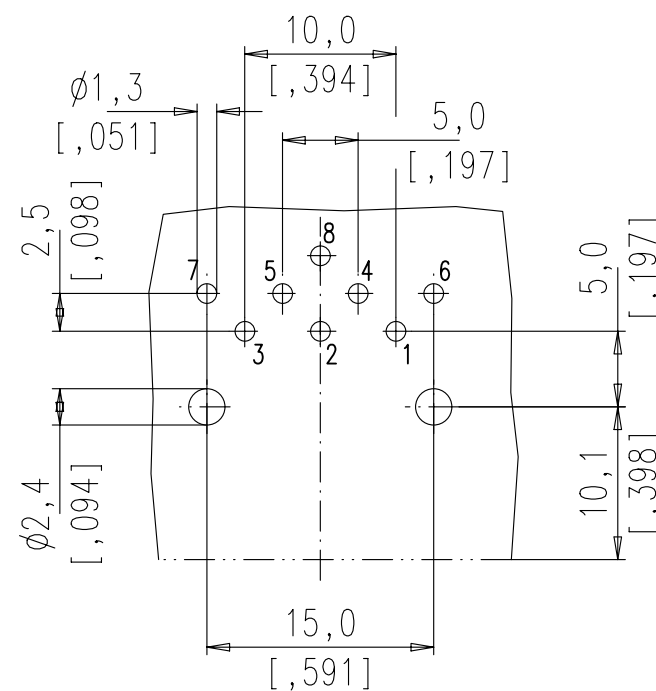

Montageausschnitt Panel Cutout

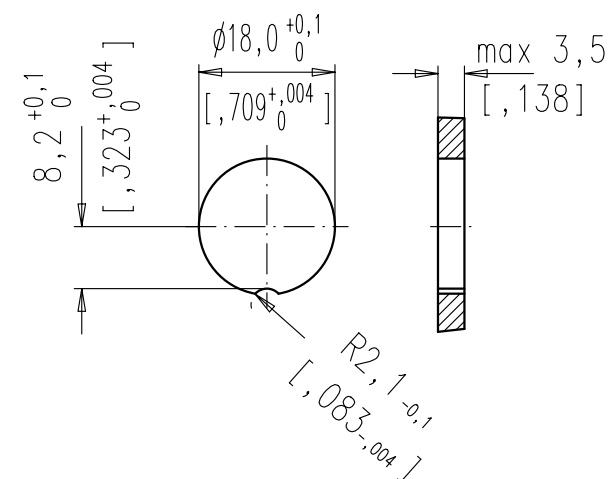

Dichtfläche eben und gratfrei.
Sealing area must be flat
and polished.


IP67 in mated condition
further technical characteristics according
catalog types C091D

All technical data have been measured in a laboratory environment and can be different during practical usage of the product. Any product information is for descriptive usage only and not legally binding; particularly the information does not constitute or provide any legal guaranties ("Beschaffenhheitsgarantie" or "Haltbarkeitsgarantie").

Do not connect or disconnect under load.
Metal housing parts shall be securely incorporated to protected ground.

Remark for gold plated contacts:
In order to avoid brittle inter-metallic connections, gold-plated terminals have to be tin-plated in the solder area.

1) thread tested with go/nogo gauge
min. outside diameter of the thread 17,7mm
(deviating from the standard DIN 13)



C091 51G008 200 2 U	gold plated contacts
C091 51G008 100 2 U	silver plated contacts
part number	description

Masse (errechnet)/Calc WT:				9		Zul. Abw./Tolerances:		Maßstab/Scale 2:1, 1:1		A3				
Prüfmaß/Testdimension						 DIN/ISO 13715		CUSTOMER DRAWING						
Teileindex Partindexnumber														
				13	Datum/Date	Name		Gerätedose abgewinkelt female receptacle right angeled						
				Gez.	26.08.	Schädel								
				Drawn										
				Gepr.										
				Checked		i.f.f.								
				Amphenol-Tuchel Electronics GmbH										
01	201300607	26.08.13	RS					M	C091 51G008 X00 2 U				Blatt/She 1 1 B	
Index		Änderung/Description		Datum/Date		Name		Ers. f./Replacement for:						