


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK5593

DATE	REV	REVISION RECORD	APP	DR	CK
8-11-04	NC	ECO 22838		ME	

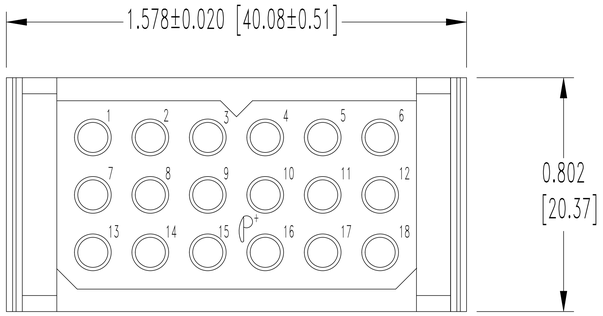



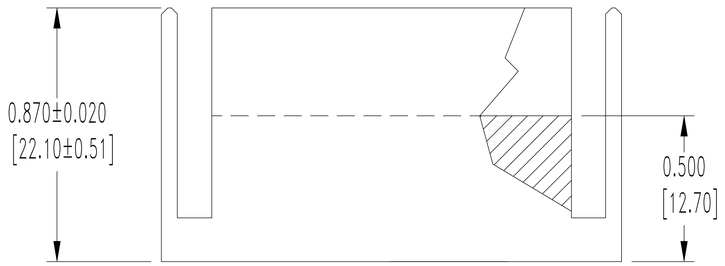

NOTES:
1. MATERIALS AND FINISHES:
   INSULATOR: GLASS-FILLED POLYESTER, UL 94V-0, BLUE COLOR.
2. ELECTRICAL CHARACTERISTICS:
   INSULATION RESISTANCE: 5 G OHMS PER IEC 512-2, TEST 3a, METHOD A.
   WORKING VOLTAGE: 600 VAC.
3. WORKING TEMPERATURE: -55°C TO +125°C.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

POSITRONIC INDUSTRIES INC.
SPRINGFIELD, MISSOURI 65801

DECIMAL TOL. ±0.015 [0.38]	PCS SERIES	SCALE N.T.S.	DRAWN BY M. ENEA
			APPROVED BY
ANGULAR TOL. ±5°	TITLE PLC18M0000		
	DATE 8-11-04	DRAWING NUMBER SK5593	REV. NC

Downloaded from Arrow.com.