

Monitoring relays

70
SERIES



Air
conditioners



Wood-
processing
machines



Hoists and
cranes



Escalators



Control panels
for pumps



Forced-air
ventilators



Finder reserves the right to make changes to its products and their technical specifications at any time and without prior notice, as part of its policy of continuous improvement.
The information contained in this document is provided for indicative purposes only and does not constitute a contractual obligation; errors and omissions excepted.
In the event of any discrepancy between the printed and online versions, the latter, available at findernet.com, shall prevail.

Electronic voltage monitoring relays for single and three-phase applications

- Multifunctional types, providing the flexibility of monitoring Undervoltage, Overvoltage, Window Mode, Phase rotation, Phase loss
- Positive safety logic - Make output contact opens if the relay detects an error
- All functions and values can be easily adjusted by the selector and trimmer on front face
- "Blade + cross" – both flat blade and cross head screw drivers can be used to adjust the regulators and the function selector
- Colored LEDs for clear & immediate visual indication
- 1 CO relay output, 6 or 10 A
- Modular housing, 17.5 or 35 mm wide
- 35 mm rail (EN 60715) mount
- Cd-free contact material

70.11/70.31
Box clamp



For outline drawing see page 16

Contact specification

Contact configuration		1 CO (SPDT)	1 CO (SPDT)
Rated current/Maximum peak current	A	10/30	6/10
Rated voltage/ Max. switching voltage	V AC	250/400	250/400
Rated load AC1	VA	2500	1500
Rated load AC15	VA	750	500
Single phase motor rating (230 V AC)	kW	0.5	0.185
Breaking capacity DC1: 24/110/220 V	A	10/0.3/0.12	6/0.2/0.12
Minimum switching load	mW (V/mA)	300 (5/5)	500 (12/10)
Standard contact material		AgNi	AgNi

Supply specification

Nominal system voltage (U_N)	V AC (50/60 Hz)	220...240	380...415
Rated power	VA (50 Hz)/W	2.6/0.8	11/0.9
Operating range	V AC (50/60 Hz)	130...280	220...510

Technical data

Electrical life at rated load AC1	cycles	$80 \cdot 10^3$	$60 \cdot 10^3$
Voltage detection level range	V	170...270	300...480
Asymmetry detection level range	%	—	—
Switch-off delay time (T on function diagrams)	s	0.5...60	0.5...60
Switch-on lock-out time	s	0.5	1
Switch-on hysteresis (H on function diagrams)	V	5 (L-N)	10 (L-L)
Power-on activation time	s	≈ 1	≈ 1
Insulation between supply and contacts (1.2/50 μ s)	kV	4	4
Dielectric strength between open contacts	V AC	1000	1000
Ambient temperature	°C	-20...+60	-20...+60
Protection category		IP 20	IP 20

Approvals (according to type)



70.11



Single-phase (220...240)V
voltage monitoring:

- Undervoltage
- Overvoltage
- Window mode (overvoltage + undervoltage)
- Voltage fault memory selectable

70.31



Three-phase (380...415)V
voltage monitoring:

- Undervoltage
- Overvoltage
- Window mode (overvoltage + undervoltage)
- Voltage fault memory selectable
- Phase loss, even under phase regeneration
- Phase rotation

Electronic voltage monitoring relays for three-phase applications

- Multifunctional types, providing the flexibility of monitoring Undervoltage, Overvoltage, Window Mode, Phase rotation, Phase loss, Asymmetry and Neutral loss
- Phase loss monitoring, even under phase regeneration
- Positive safety logic - Make output contact opens if the relay detects an error
- All functions and values can be easily adjusted by the selector and trimmer on front face
- "Blade + cross" – both flat blade and cross head screw drivers can be used to adjust the regulators and the function selector
- Colored LEDs for clear & immediate visual indication
- 1 or 2 CO relay output, 6 or 8 A
- Modular housing, 35 mm wide
- 35 mm rail (EN 60715) mount
- Cd-free contact material

70.41/70.42
Box clamp

For outline drawing see page 16

Contact specification

Contact configuration		1 CO (SPDT)	2 CO (DPDT)
Rated current/Maximum peak current	A	6/10	8/15
Rated voltage/ Max. switching voltage	V AC	250/400	250/400
Rated load AC1	VA	1500	2000
Rated load AC15	VA	500	400
Single phase motor rating (230 V AC)	kW	0.185	0.3
Breaking capacity DC1: 24/110/220 V	A	6/0.2/0.12	8/0.3/0.12
Minimum switching load	mW (V/mA)	500 (12/10)	300 (5/5)
Standard contact material		AgNi	AgNi

Supply specification

Nominal system voltage (U_N)	V AC (50/60 Hz)	380...415	380...415
Rated power	VA (50 Hz)/W	11/0.9	12.5/1
Operating range	V AC (50/60 Hz)	220...510	220...510

Technical data

Electrical life at rated load AC1	cycles	$60 \cdot 10^3$	$60 \cdot 10^3$
Voltage detection level range	V	300...480	300...480
Asymmetry detection level range	%	4...25	5...25
Switch-off delay time (T on function diagrams)	s	0.5...60	0.5...60
Switch-on lock-out time	s	1	1
Switch-on hysteresis (H on function diagrams)	V	10 (L-L)	10 (L-L)
Power-on activation time	s	≈ 1	≈ 1
Insulation between supply and contacts (1.2/50 μ s)	kV	4	4
Dielectric strength between open contacts	V AC	1000	1000
Ambient temperature	°C	-20...+60	-20...+60
Protection category		IP 20	IP 20

Approvals (according to type)**70.41**

Three-phase (380...415 V, with or without neutral) voltage monitoring:

- Window mode (overvoltage + undervoltage)
- Phase loss
- Phase rotation
- Asymmetry
- Neutral loss selectable

70.42

Three-phase (380...415 V, with neutral) voltage monitoring:

- Undervoltage
- Overvoltage
- Window mode (overvoltage + undervoltage)
- Voltage fault memory selectable
- Phase loss
- Phase rotation
- Asymmetry
- Neutral loss

Universal current detecting and monitoring relays

Type 70.51.0.240.2032

- Current Control standard version

Type 70.51.0.240.N032

- Current Control Programmable via NFC version

Multifunctional type, providing the flexibility of monitoring Undercurrent, Overcurrent and Window Mode

- Positive safety logic - Make output contact opens if the relay detects an error
- All functions and values can be easily adjusted by the selector and trimmer on front face (70.51.0.240.2032) OR via NFC toolbox APP (70.51.0.240.N032)
- "Blade + cross" –both flat blade and cross head screw drivers can be used to adjust the regulators and the function selector
- Colored LED for clear & immediate visual indication
- 1 CO 10 A relay output
- Modular housing, 35 mm wide

70.51

Box clamp



For outline drawing see page 17

70.51.0.240.2032



- 6 Functions universal current monitoring relay
- AC/DC current detection 50 mA...16 A
- Fault memory selectable
- Switch-on hysteresis (5...50)% (1...99% in Window Mode)

70.51.0.240.N032



- 6 Functions universal current monitoring relay
- AC/DC current detection 50 mA...16 A
- Programmable via Toolbox NFC app

Contact specification

Contact configuration		1 CO (SPDT)
Rated current/Maximum peak current	A	10/15
Rated voltage/ Maximum switching voltage	V AC	250/400
Rated load AC1	VA	2500
Rated load AC15 (230 V AC)	VA	500
Single phase motor rating (230 V AC)	kW	0.5
Breaking capacity DC1: 24/110/220 V	A	10/0.3/0.12
Minimum switching load	mW (V/mA)	300 (5/5)
Standard contact material		AgSnO ₂

Supply specification

Nominal voltage (U _N)	V AC (50/60 Hz)	24...240
	V DC	24...240
Rated power AC/DC	VA (50 Hz)/W	2.5/0.53
Operating range	AC	(0.8...1.1)U _N
	DC	(0.8...1.1)U _N

Technical data

Electrical life at rated load AC1	cycles	100 · 10 ³
Detection levels	AC(50/60 Hz)/DC	50 mA...16 A
Switch-on lock-out time (T1 on function diagrams)	s	0.1...40
Switch-on hysteresis (H on function diagrams)	%	5...50 (1...99 in Window Mode)
Switch-off delay time (T2 on function diagrams)	s	0.1...30
Electrical isolation: Supply to Measuring circuits		Yes
Ambient temperature range	°C	-20...+55
Protection category		IP 20
Approvals (according to type)		CE UK ENEC

Electronic phase loss and rotation monitoring relays for three-phase applications

- Universal voltage monitoring (U_N from 208 V to 480 V, 50/60 Hz)
- Phase loss monitoring, even under phase regeneration
- Positive safety logic - Make contact opens if the relay detects an error
- 2 versions:
1 CO relay output, 6 A (17.5 mm wide), and
2 CO relay output, 8 A (22.5 mm wide)
- 35 mm rail (EN 60715) mount
- European patent pending for the innovative principle at the root of the 3 phase monitoring and error survey system (70.61)

 70.61/70.62
Box clamp

 70.61-P000
Push-in terminal

70.61/70.61-P000

 Three-phase (208...480)V
voltage monitoring:

- Phase loss
- Phase rotation

70.62

 Three-phase (208...480)V
voltage monitoring:

- Phase loss
- Phase rotation

For outline drawing see page 17

Contact specification

Contact configuration		1 CO (SPDT)	2 CO (DPDT)
Rated current/Maximum peak current	A	6/15	8/15
Rated voltage/ Max. switching voltage	V AC	250/400	250/400
Rated load AC1	VA	1500	2000
Rated load AC15	VA	250	400
Single phase motor rating (230 V AC)	kW	0.185	0.3
Breaking capacity DC1: 24/110/220 V	A	3/0.35/0.2	8/0.3/0.12
Minimum switching load	mW (V/mA)	500 (10/5)	300 (5/5)
Standard contact material		AgSnO ₂	AgNi

Supply specification

Nominal system voltage (U_N)	V AC (50/60 Hz)	208...480	208...480
Rated power	VA (50 Hz)/W	8/1	11/0.8
Operating range	V AC (50/60 Hz)	170...500	170...520

Technical data

Electrical life at rated load AC1	cycles	$100 \cdot 10^3$	$60 \cdot 10^3$
Switch-off delay time	s	0.5	0.5
Switch-on lock-out time	s	0.5	0.5
Power-on activation time	s	< 2	< 2
Insulation between supply and contacts (1.2/50 μ s)	kV	5	5
Dielectric strength between open contacts	V AC	1000	1000
Ambient temperature	°C	-20...+60	-20...+60
Protection category		IP 20	IP 20

Approvals (according to type)


Thermistor temprature sensing relays for industrial aplication

- Temperature detection with PTC
- PTC short circuit detection
- PTC wire breakage detection
- Positive safety logic - Make contact opens if the relay detects an error
- Fault memory selectable
- LED status indication
- 35 mm rail (EN 60715) mounting

70.92

Box clamp



70.92.x.xxx.0002



- 6 functions
- RESET delay time (0.5s or 3s) selectable
- RESET terminals

For outline drawing see page 17

Contact specification

Contact configuration		2 CO (DPDT)
Rated current/Maximum peak current	A	8 /15
Rated voltage/ Maximum switching voltage	V AC	250/400
Rated load AC1	VA	2000
Rated load AC15 (230 V AC)	VA	400
Single phase motor rating (230 V AC)	kW	0.3
Breaking capacity DC1: 24/110/220 V	A	8/0.3/0.12
Minimum switching load	mW (V/mA)	300 (5/5)
Standard contact material		AgNi

Supply specification

Nominal voltage (U _N)	V AC (50/60 Hz)	230
	V AC/DC	24
Rated power AC/DC	VA (50 Hz)/W	1/0.5
Operating range	AC	184...253
	AC/DC	19.2...26.4

Technical data

Electrical life at rated load AC1	cycles	100 · 10 ³
PTC detecting:	Short circuit/Temperture OK	< 20 Ω/>20 Ω...< 3 kΩ
	RESET/PTC break	< 1.3 kΩ / > 3 kΩ
RESET delay time	s	0.5 or 3
Ambient temperature range	°C	-20...+55
Protection category		IP 20

Approvals (according to type)



Ordering information

Example: 70 series, three-phase voltage monitoring relays, 1 output, supply voltage 380...415 V AC.

70.31.8400.202

Series	D: Fault memory option 0 = No fault memory 2 = Fault memory function selectable
Type 1 = 1 phase AC line monitoring 3 = 3 phase AC line monitoring 4 = 3 phase + neutral AC line monitoring 5 = AC/DC universal- Current detection 6 = 3 phase loss and rotation monitoring 9 = Thermistor relays (temperature monitoring with PTC thermistor)	C: Time delay setting 0 = Fixed switch-off delay 2 = Adjustable switch-off delay 3 = Adjustable switch-off delay and asymmetry (for 70.41 and 70.42 only) Adjustable switch-off and switch-on delay (for 70.51 only)
No. of poles 1 = 1 pole 2 = 2 pole	B: Contact circuit 0 = CO (nPDT)
Supply version 0 = AC (50/60 Hz)/DC 8 = AC (50/60 Hz)	A: Detection Values / Terminals options 0 = Non-adjustable detection values 2 = 2 adjustable detection values P = Push-in terminals (70.61 only) N = Programmable via NFC (70.51 only)
Supply voltage 024 = 24 V AC/DC (70.92) 230 = 230 V (70.92) 230 = 220...240 V (70.11) 240 = 24...240 V AC/DC (70.51) 400 = 380...415 V (70.31/41/42) 400 = 208...480 V (70.61/62)	Codes 70.11.8.230.2022 70.61.8.400.0000 70.31.8.400.2022 70.61.8.400.P000 70.41.8.400.2030 70.62.8.400.0000 70.42.8.400.2032 70.92.0.024.0002 70.51.0.240.2032 70.92.8.230.0002 70.51.0.240.N032

Selection guide

Type	70.11.8.230.2022	70.31.8.400.2022	70.41.8.400.2030	70.42.8.400.2032	70.51.0.240.x032	70.61.8.400.x000	70.62.8.400.0000	70.92.x.xxx.0002
Supply system type	Single phase	3-phase	3-phase/ 3-phase + neutral	3-phase + neutral	Single phase	3-phase	3-phase	Single phase
Functions								
Undervoltage/Overvoltage	AC	AC	—	AC	—	—	—	—
Window mode (Undervoltage and Overvoltage)	AC	AC	AC	AC	—	—	—	—
Phase loss	—	•	•	•	—	•	•	—
Phase rotation	—	•	•	•	—	•	•	—
Asimmetry	—	—	•	•	—	—	—	—
Neutral loss	—	—	•	•	—	—	—	—
Overcurrent/Undercurrent	—	—	—	—	•	—	—	—
Window mode (Undercurrent and Overcurrent)	—	—	—	—	•	—	—	—
Thermistor relay (PTC)	—	—	—	—	—	—	—	•
Delay Times								
Fixed	—	—	—	—	—	•	•	•
Adjustable	•	•	•	•	•	—	—	—
Supply voltage								
24 V AC/DC	—	—	—	—	—	—	—	•
24...240 V AC/DC	—	—	—	—	•	—	—	—
230 V AC	•	—	—	—	—	—	—	•
400 V AC	—	•	•	•	—	•	•	—
Module width								
35 mm wide	—	•	•	•	•	—	—	—
22.5 mm wide	—	—	—	—	—	—	•	•
17.5 mm wide	•	—	—	—	—	•	—	—
Other data								
Fault memory	•	•	—	•	•	—	—	•
Contact configuration	1 CO	1 CO	1 CO	2 CO	1 CO	1 CO	2 CO	2 CO

Technical data


Insulation			70.11/31/41/42	70.51	70.61	70.62/92	
Between supply and contacts	dielectric strength	V AC	2500	2500	2500	3000	
	impulse (1.2/50 μs)	kV	4	4	5	5	
Between open contacts	dielectric strength	V AC	1000	1000	1000	1000	
	impulse (1.2/50 μs)	kV	1.5	1.5	1.5	1.5	
EMC specifications							
Type of test			Reference standard				
Electrostatic discharge	contact discharge		EN 61000-4-2		4 kV		
	air discharge		EN 61000-4-2		8 kV		
Radiated electromagnetic field	(80...1000 MHz)		EN 61000-4-3		10 V/m		
	(1...2.8 GHz)		EN 61000-4-3		5 V/m		
Fast transients (burst 5/50 ns, 5 and 100 kHz)	on supply terminals		EN 61000-4-4		4 kV		
Voltage pulses on supply terminals (surge 1.2/50 μs)	common mode		EN 61000-4-5		4 kV		
	differential mode		EN 61000-4-5		4 kV		
Radiofrequency common mode voltage (0.15...230 MHz)	on supply terminals		EN 61000-4-6		10 V		
Voltage dips	70% U _N		EN 61000-4-11		25 cycles		
Short interruptions			EN 61000-4-11		1 cycle		
Radiofrequency conducted emissions	(0.15...30 MHz)		CISPR 11		class B		
Radiated emissions	(30...1000 MHz)		CISPR 11		class B		
Terminals			70.61/62/92		70.61-P000		
Min. wire size			Box clamp		Push-in terminals		
			Solid cable	Stranded cable	Solid cable	Stranded cable	
			mm ²	0.5	0.5	0.75	0.75
			AWG	20	20	18	18
Max. wire size			Solid cable	Stranded cable	Solid cable	Stranded cable	
		mm ²	1 x 6 / 2 x 4	1 x 4 / 2 x 2.5	1 x 1.5 / 2 x 1.5	1 x 2.5 / 2 x 2.5	
		AWG	1 x 10 / 2 x 12	1 x 12 / 2 x 14	1 x 16 / 2 x 16	1 x 14 / 2 x 14	
Wire strip length		mm	8		9		
 Screw torque		Nm	0.8		—		
			70.11/31/41/42/51				
Min. wire size			Box clamp				
			Solid cable		Stranded cable		
			mm ²	0.5		0.5	
			AWG	20		20	
Max. wire size			Solid cable		Stranded cable		
		mm ²	1 x 4 / 2 x 2.5		1 x 4 / 2 x 2.5		
		AWG	1 x 12 / 2 x 14		1 x 12 / 2 x 14		
Wire strip length		mm	8				
 Screw torque		Nm	0.8				
Other data			70.11	70.31/41	70.42/61/62/92	70.51	
Power lost to the environment	without output current	W	0.8	0.9	1	2 (230 V AC) / 0.2 (24 V DC)	
	with rated output current	W	2	1.2	1.4	2.5 (230 V AC) / 0.5 (24 V DC)	

Functions

Output relay On (NO closed) when all OK: positive logic.

Type
70.11
70.31
70.42

Overvoltage (OV and OVm functions)

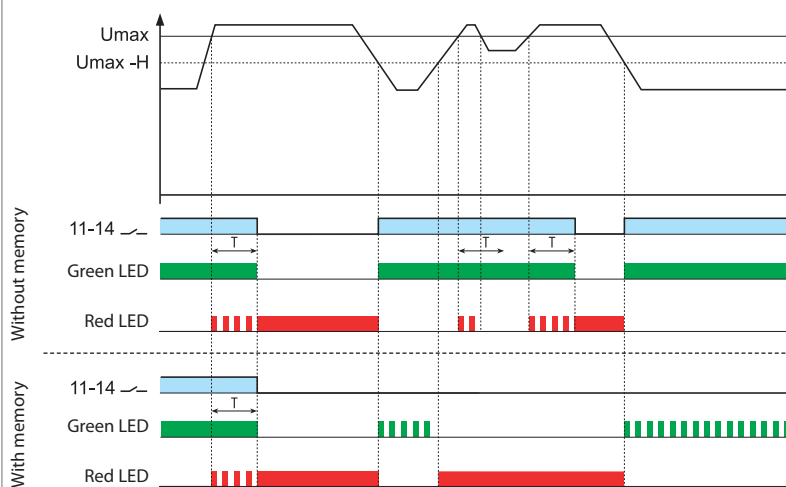

Functions

-  = Output contact (11-14, 21-24 for 70.42 only)
- OV = Overvoltage
- OVm = Overvoltage with memory
- UV = Undervoltage
- UVm = Undervoltage with memory
- W = Window mode (OV + UV)
- Wm = Window mode (OV + UV) with memory
- H = Hysteresis

If the voltage moves out of limits, following delay T the output relay turns Off.


When the voltage is again within limits ($\pm$ the Switch-on hysteresis H):

- if set in the “without memory” position, the output relay “recovers”, i.e. it turns On (after the Switch-on lock-out time) without any memory of the previous event.
- if set in the “with memory” position (70.11, 70.42 and 70.31 only), the output relay remains open. To reset, it is necessary to switch the supply Off and then On again, or to rotate the selector first to an adjacent position and then to the original position.

E


Type
70.11
70.31
70.42

Undervoltage (UV and UVm functions)

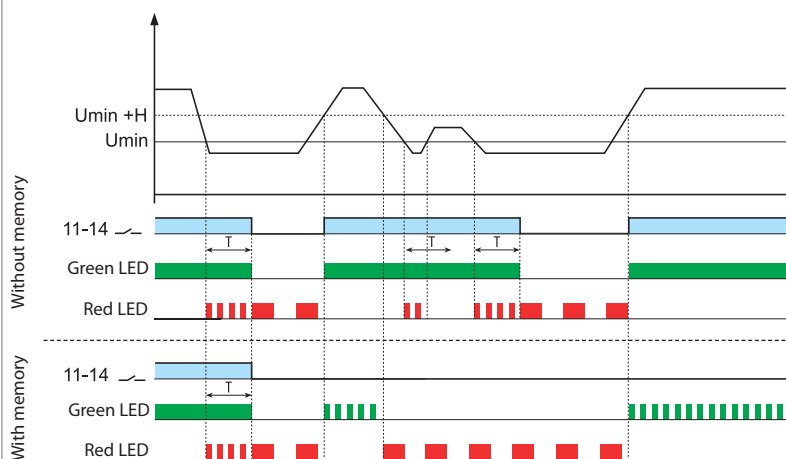




Type
70.11
70.31
70.41
(70.41
without
memory)
70.42

Window mode (overvoltage + undervoltage, W and Wm functions)

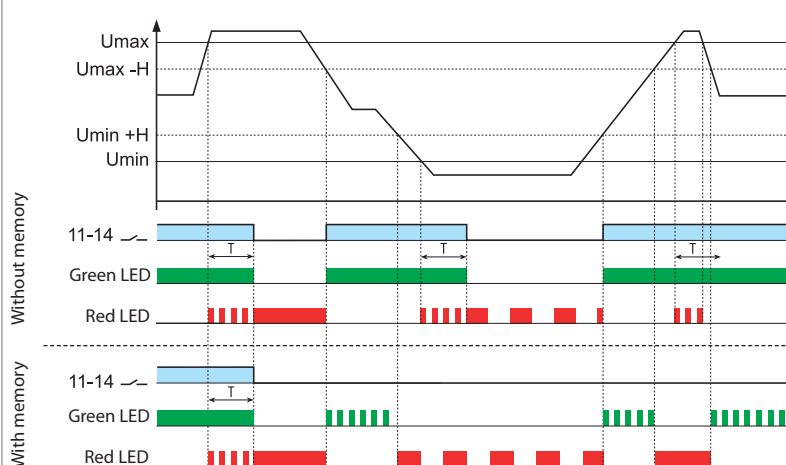

Functions

Output relay On (NO closed) when all OK: positive logic.

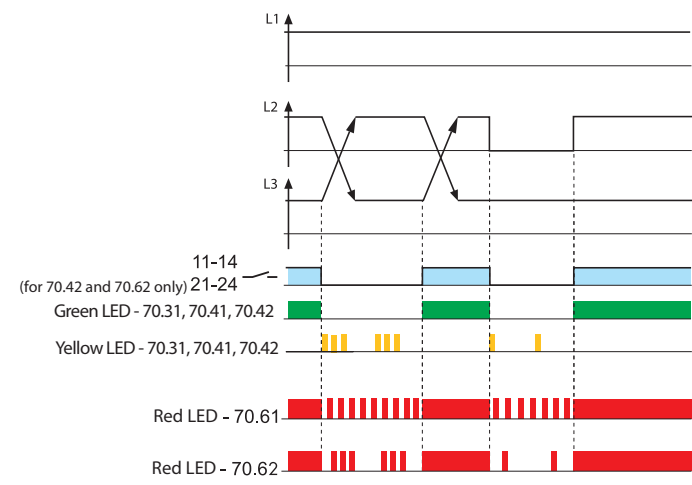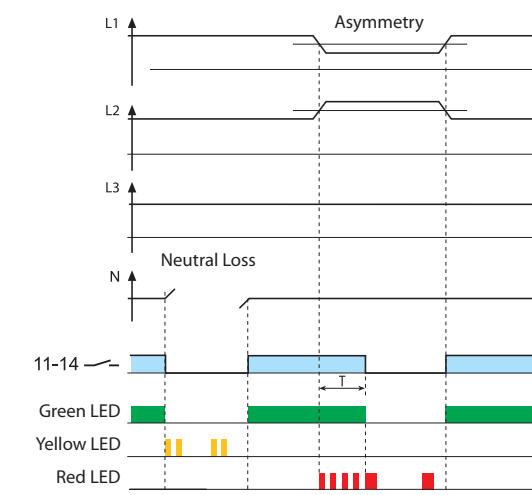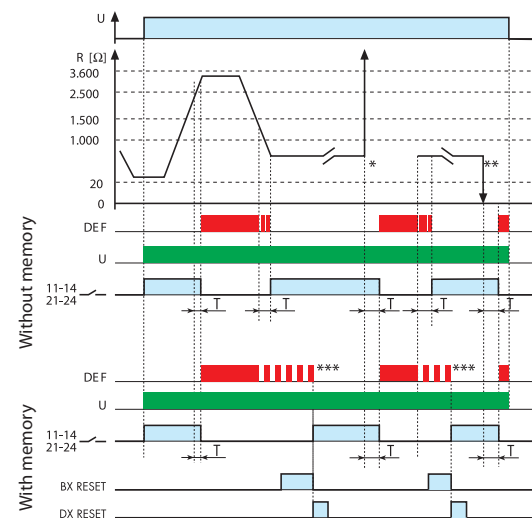
Type 70.31 70.41 70.42 70.61 70.62	Phase loss and phase rotation 	If the sequence (L1, L2, L3) is incorrect at power-on, the output relay will not turn-on. If a phase is lost, the output relay turns off immediately. When the phase is again active, the output relay turns on immediately. Phase loss monitoring possible even under regeneration up to 80% of the average of the other 2 phases.
Type 70.41 70.42	Neutral loss and asymmetry 	If the neutral is lost (and the Neutral control function is set), the output relay turns off immediately. When the neutral is again present, the output relay turns on immediately. If the asymmetry $(U_{\max} - U_{\min})/U_N$ is above the % set value, the output relay turns off after the set delay T. When the asymmetry is again below the % set value (with a fixed hysteresis of approximately 2%), the output relay turns on after the Switch-on lock-out time.
Type 70.92	 * PTC-Break ** PTC-Short circuit *** RESET MEMORY = Operate the RESET key, or interrupt the supply.	The contact open if: – thermistor line break – over temperature $R_{PTC} > (2.5 \dots 3.6)k\Omega$ – thermistor line short circuit ($R_{PTC} < 20 \Omega$) – loss of supply The contact close if: – temperature within limits – $R_{PTC} > (1.0 \dots 1.5)k\Omega$ on power-up – $(1 \dots 1.5)k\Omega$ on cooling In BX mode (BF 0.5s or BL 3s) RESET work on falling front of the signal. In DX mode (DF 0.5s or DL 3s) RESET work on rising front of the signal. RESET signal must be >1s.

Functions


Output relay On (NO closed) when all OK: positive logic.

Type
70.51

Overcurrent (OC and OCm functions)

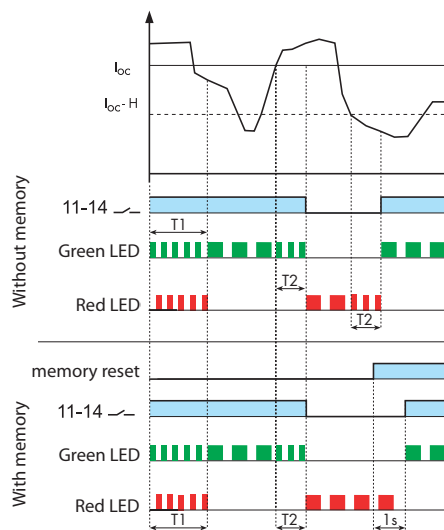

Undercurrent (UC and UCm functions)

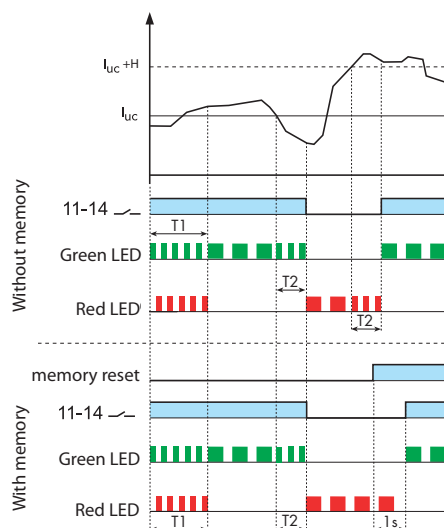

Functions

— = Output contact 11-14
 OC = Overcurrent
 OCm = Overcurrent with memory
 UC = Undercurrent
 UCm = Undercurrent with memory
 W = Window mode (OC + UC)
 Wm = Window mode (OC + UC) with memory
 H = Hysteresis

If the current moves out of limits, following delay T_2 the output relay turns Off.



When the current is again within limits the Switch-on hysteresis **H**:

- if set in the "without memory" position, the output relay "recovers", i.e. it turns On (after the Switch-on lock-out time) without any memory of the previous event;
- if set in the "with memory" position the output relay remains open.



To reset, it is necessary to switch the supply Off and then On again, or to push button connected on RESET terminals.

During T_1 delay the relay don't monitoring.

Window Mode (Overcurrent + Undercurrent, W and Wm functions)

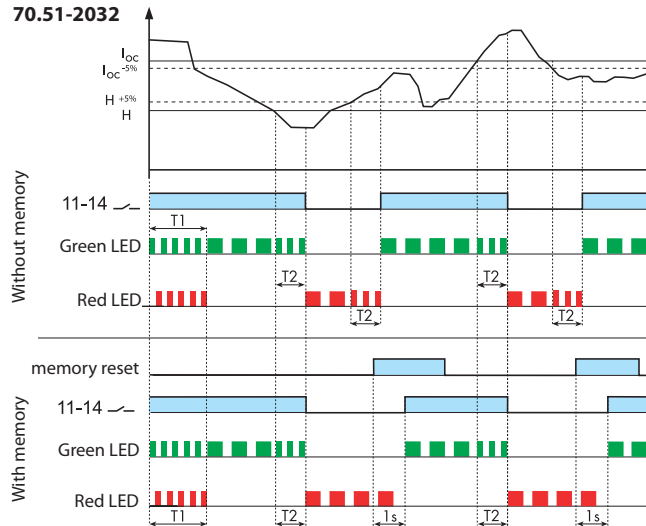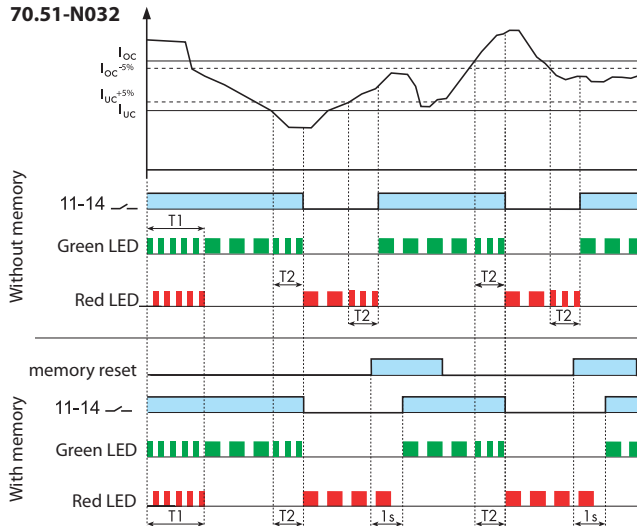
Type
70.51-2032Type
70.51-N032

Front view: function selector and regulators


70.11	70.31	70.41
 Functions: OV, OVm, UV, UVm, W, Wm T_{off} delay: (0.5...60)s U_{Max}: (220...270)V U_{Min}: (170...230)V	 Functions: OV, OVm, UV, UVm, W, Wm U_{Max}: (380...480)V U_{Min}: (300...400)V T_{off} delay: (0.5...60)s	 N= With N-line monitoring N≠ Without N-line monitoring U_{Max}: (380...480)V $(4...25)\% U_N$ U_{Min}: (300...400)V T_{off} delay: (0.5...60)s

E

70.42
 Functions: OV, OVm, UV, UVm, W, Wm U_{Max}: (380...480)V $(5...25)\% U_N$ U_{Min}: (300...400)V T_{off} delay: (0.5...60)s

70.51
 Detection levels I_M: (0.5, 1, 2, 5, 10, 16) A Functions: OC, OCm, UC, UCm, W, Wm Current value (0...I_M) Switch on lock out time (0.1...40)s Switch OFF Delay (0.1...30)s Hysteresis 5...50% 1...99% in Window Mode

LED indication


Monitoring relays Type	LED	Supply system normal	Supply system abnormal (Voltage out of limits, switch-off delay time T running)	Supply system abnormal (Reason for switch-off, RESET necessary when "with Memory" is selected)
		Contact 11 - 14 closed	Contact 11 - 14 closed	Contact 11-14 open
70.11.8.230.2022	• •		 	 Overvoltage OV and OVm  Undervoltage UV and UVm  With Memory, following a failure a manual "RESET" ** is necessary
70.31.8.400.2022	• • •		 	 Overvoltage OV and OVm  Undervoltage UV and UVm  Phase loss  Phase rotation  With Memory, following a failure a manual "RESET" ** is necessary
70.41.8.400.2030	• • •		 	 Overvoltage OV  Undervoltage UV  Asymmetry  Phase loss  Neutral loss  Phase rotation
70.42.8.400.2032	• • •		 	 Overvoltage OV and OVm  Undervoltage UV and UVm  Asymmetry  Phase loss  Neutral loss  Phase rotation  With Memory, following a failure a manual "RESET" ** is necessary
70.51.0.240.x032	• •	  	 or  (during T2 time)  (during T1 time)	 or  (during T2 time)
70.61.8.400.x000	•			 Phase rotation or Phase loss
70.62.8.400.0000	•			 Phase loss  Phase rotation

* The function "with Memory" is only available for type 70.11, 70.31, 70.42 and 70.51.


** It is necessary to switch the supply OFF and then On again (U off U on) or to rotate the function selector first to an adjacent position and then to the original position.

Wiring diagrams


Type 70.11

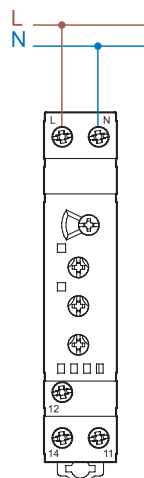


Type 70.31

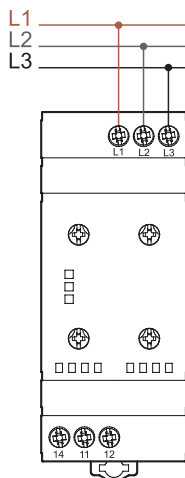


Type 70.41

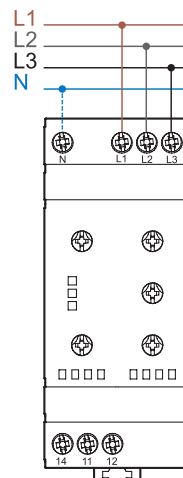


Type 70.42

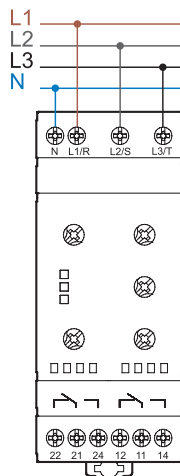


Type 70.51 and 70.51 NFC

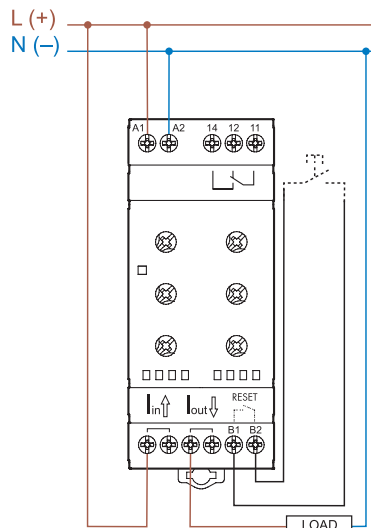


Type 70.51 and 70.51 NFC with TA connection

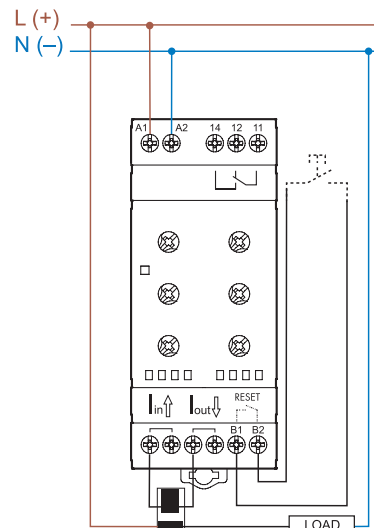


Type 70.61

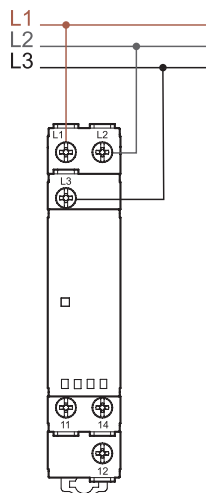

Type 70.62

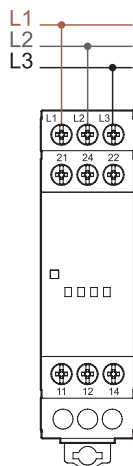


Type 70.92

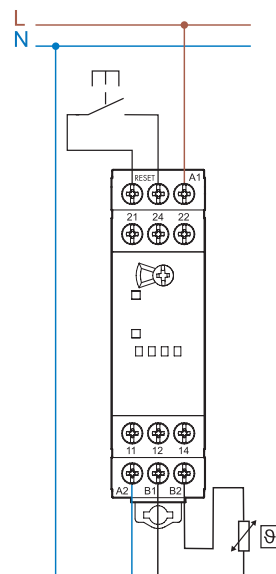

Wiring diagrams


Application example

The output contact switches the coil of the line contactor.

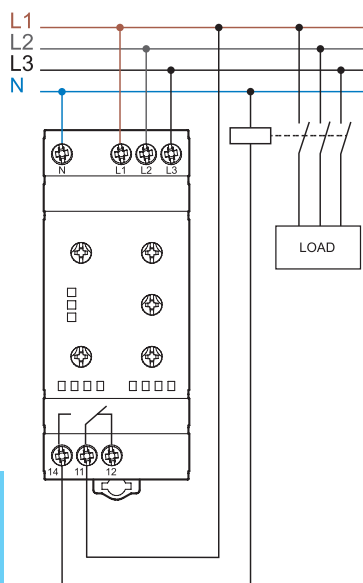


Outline drawings


Type 70.11
Box clamp

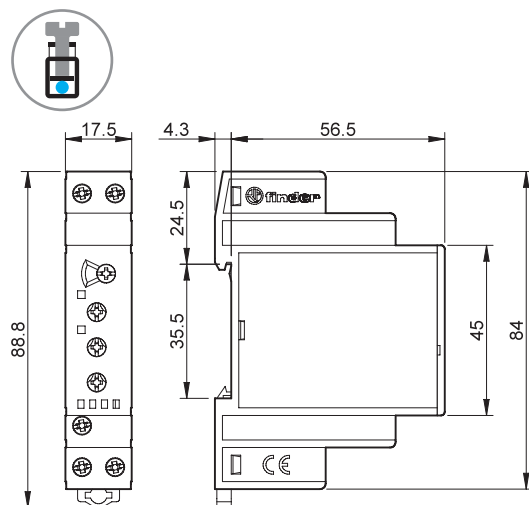


Type 70.31
Box clamp

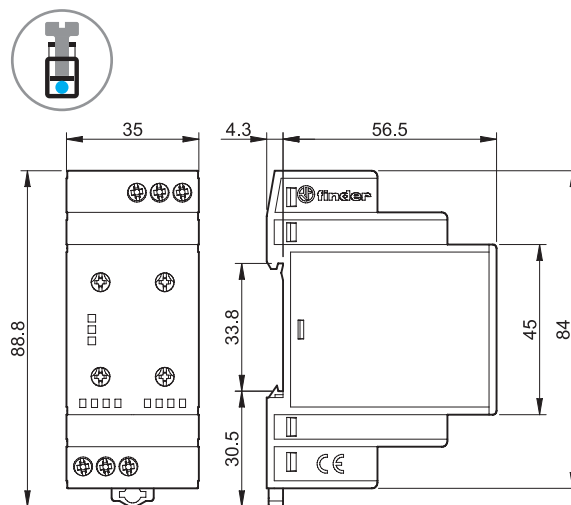

Type 70.41
Box clamp

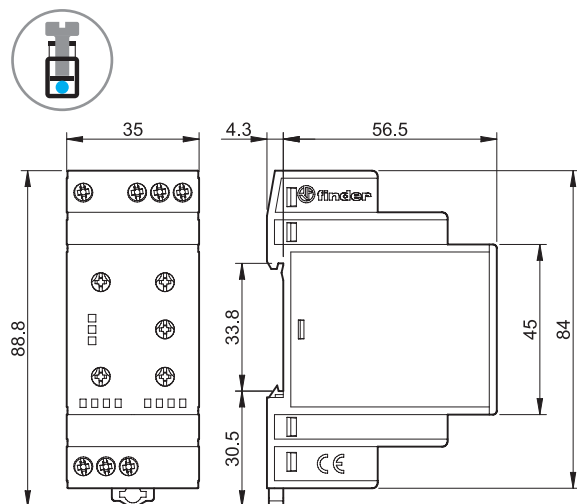


Type 70.42
Box clamp

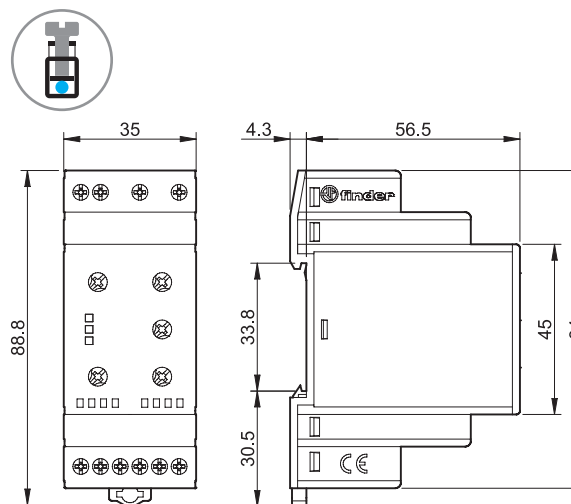


Outline drawings


Type 70.51.0.240.2032
Box clamp

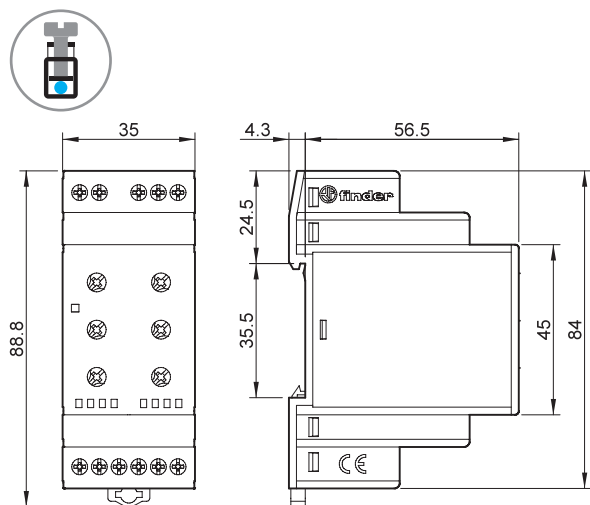


Type 70.51.0.240.N032
Box clamp

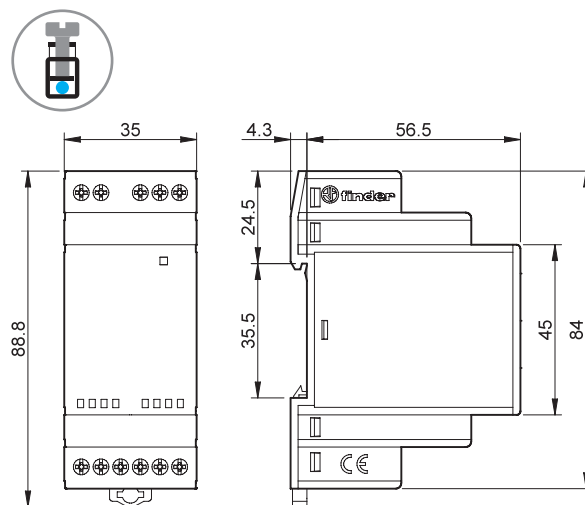


Type 70.61
Box clamp

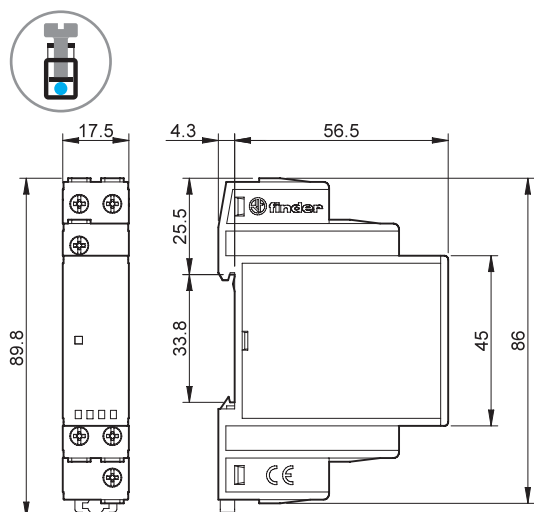


Type 70.61-P000
Push-in terminal

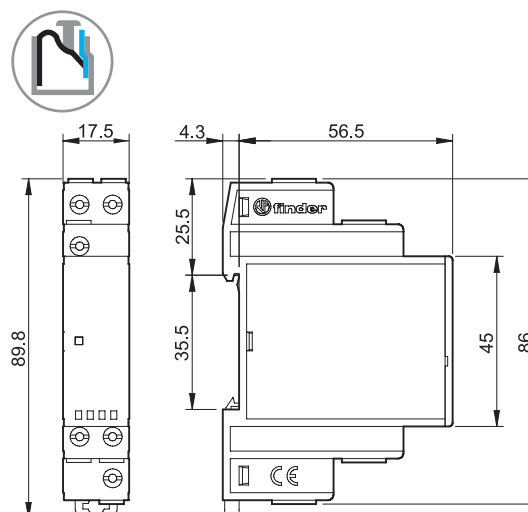

Type 70.62
Box clamp

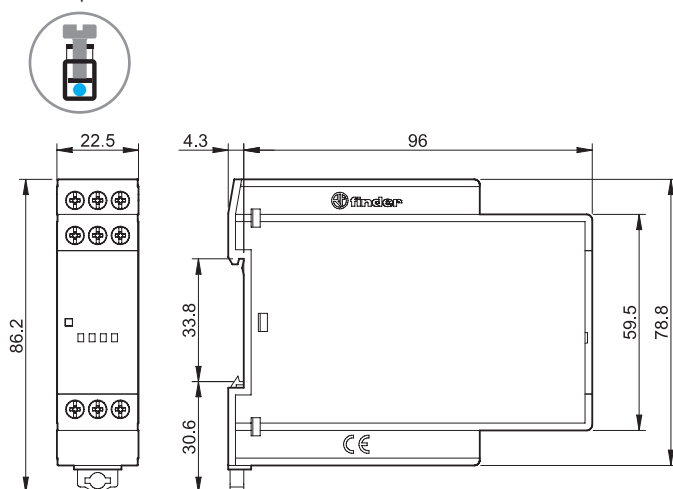

Type 70.92
Box clamp

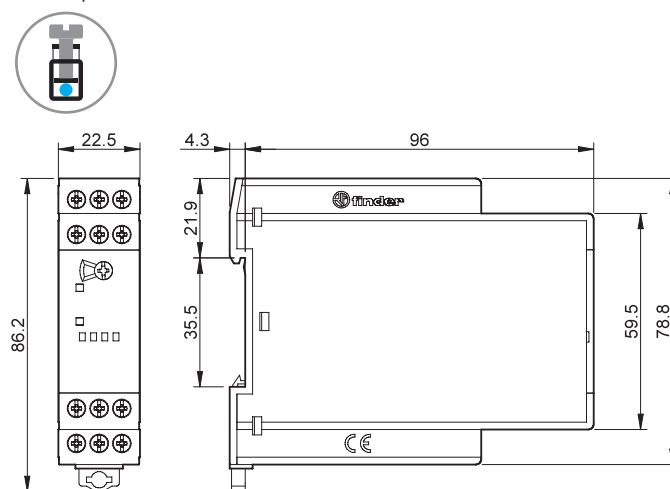


Accessories



020.01

Adaptor for panel mounting, plastic, 17.5 mm wide for 70.11, 70.61 and 70.92


020.01

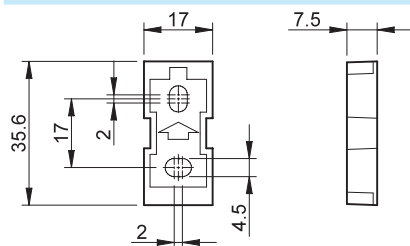


011.01

Adaptor for panel mounting, plastic, 35 mm wide for 70.31, 70.41, 70.42 and 70.51

011.01

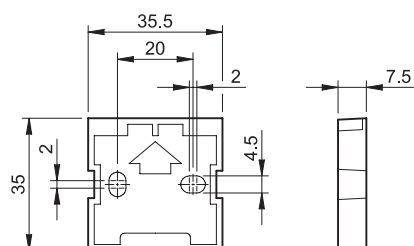**Sheet of marker tags (CEMBRE Thermal transfer printers) for relays types 70.11, 70.31, 70.41, 70.42, 70.51, 70.62 and 70.92 (48 tags), 6 x 12 mm**

060.48



060.48



022.09

Separator for rail mounting, plastic, 9 mm wide

022.09

