

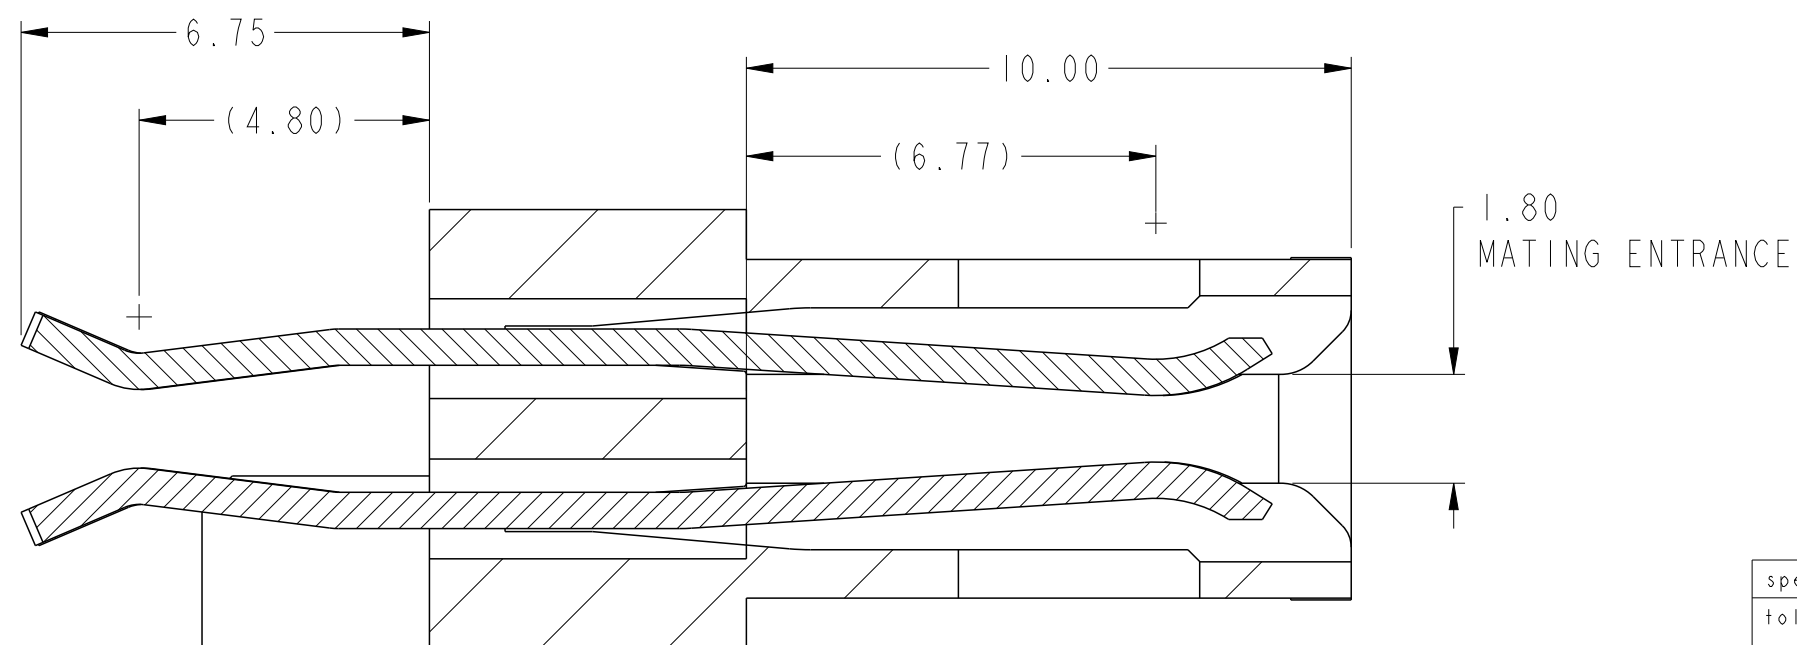
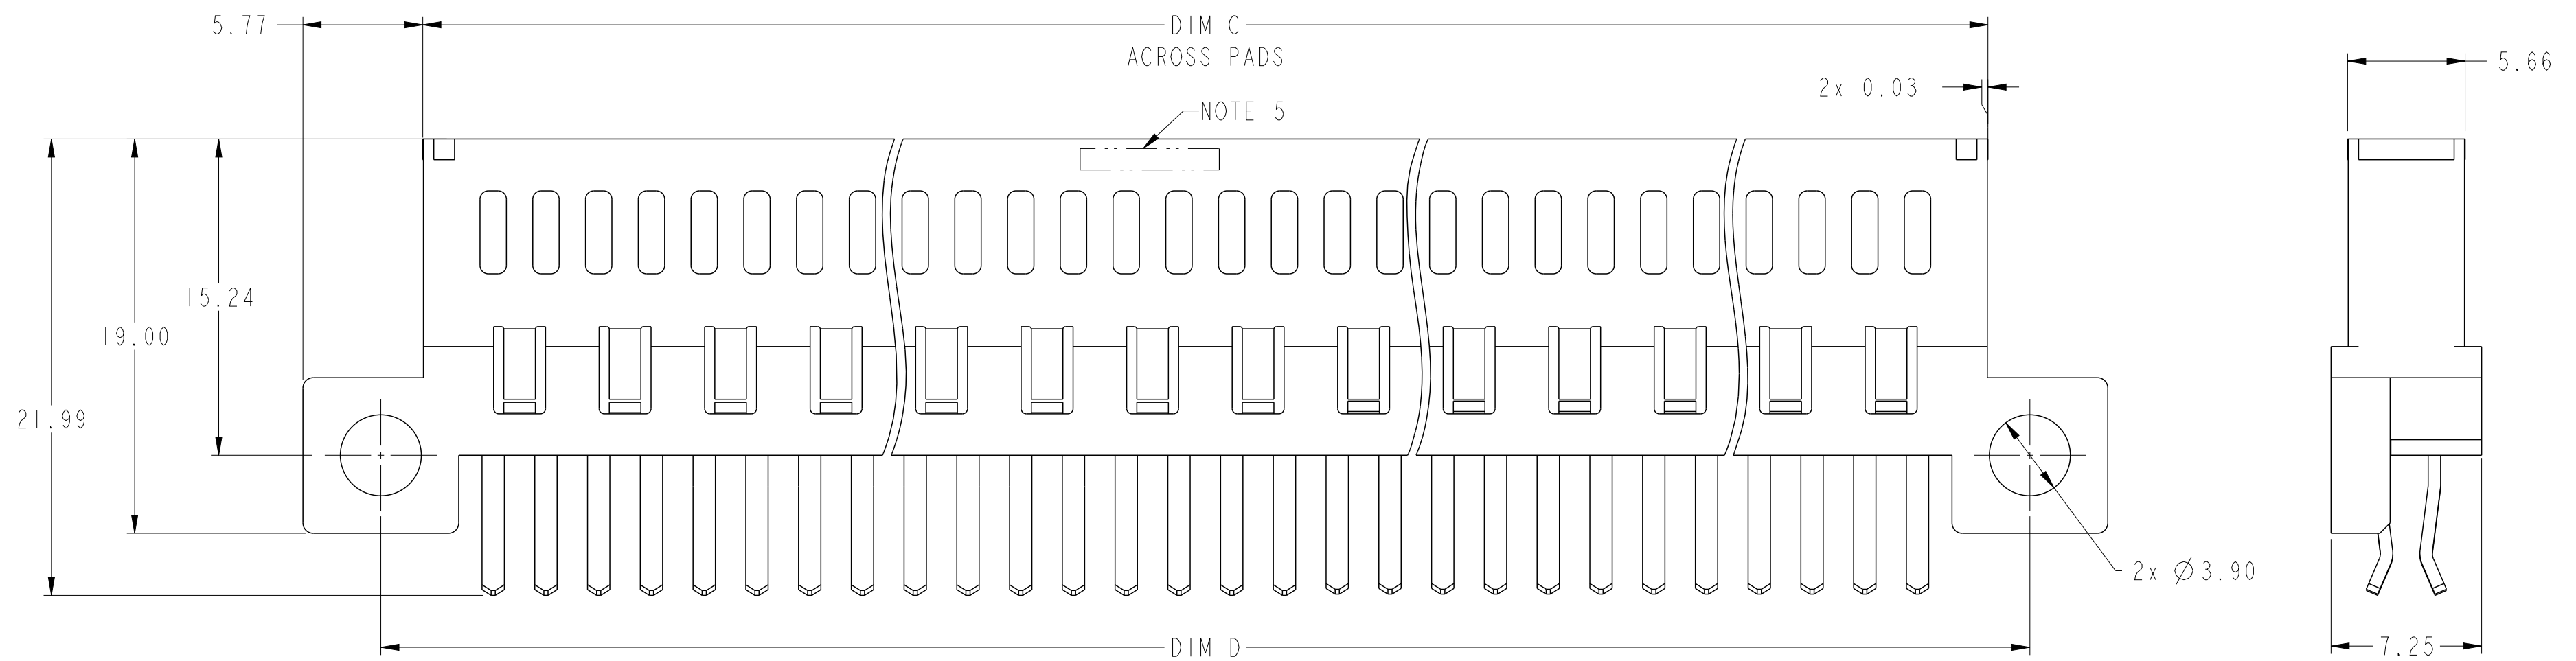


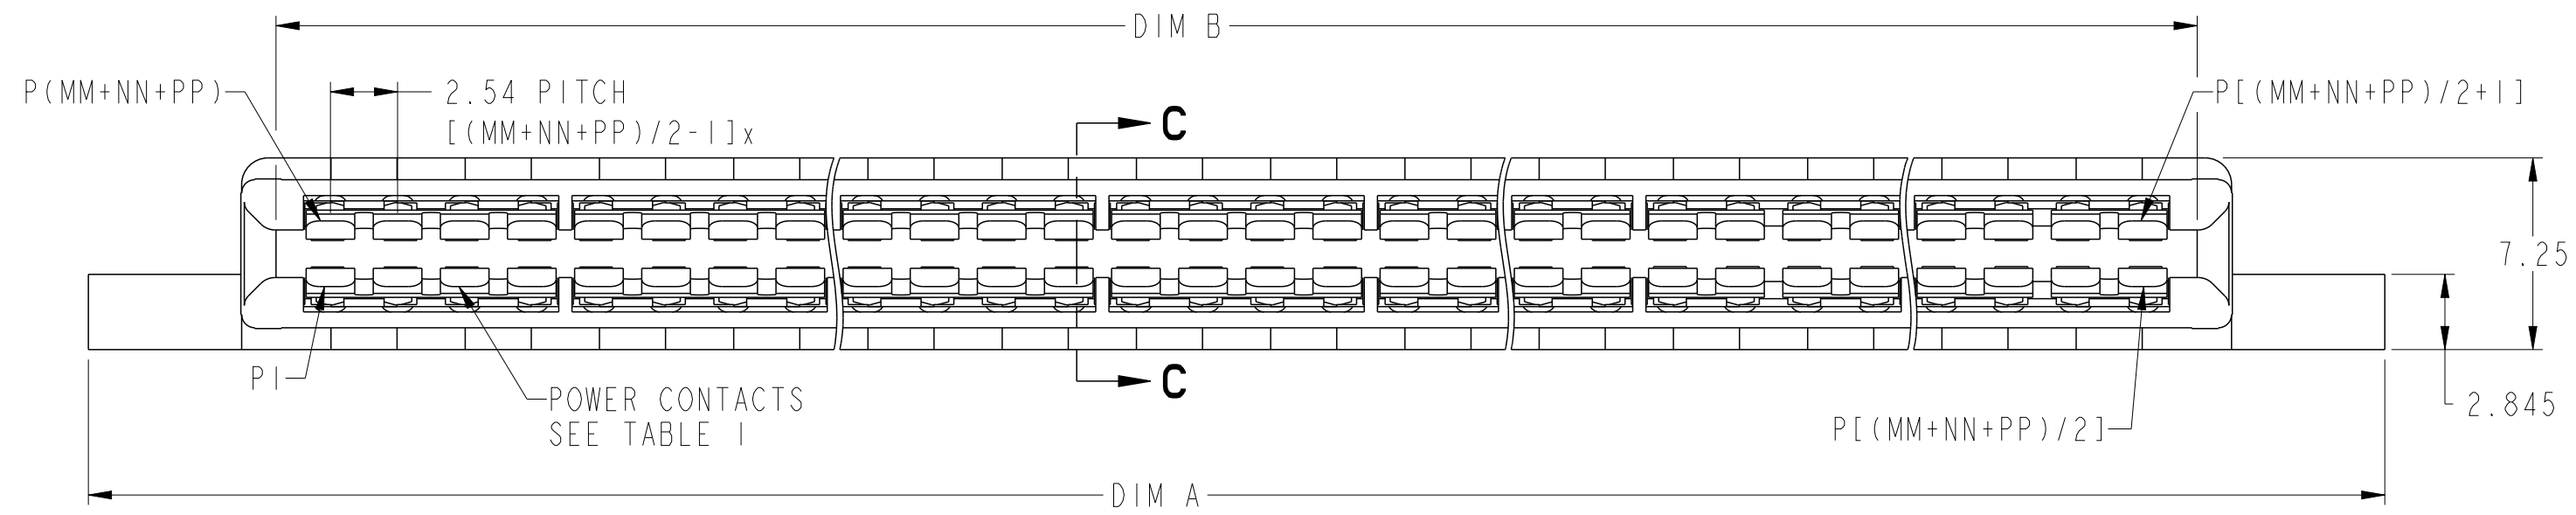


SECTION C-C
SCALE 8:1

REV	ECN NO.	DR	DATE
A	---	JW	2013-06-24


spec ref	-	dr	Julia Wang	2013/06/25	projection	MM	size	A2	scale	4:1
tolerance std	ASME Y14.5	eng	Julia Wang	2013/06/28	chr	Eleven Hu	2013/06/28	ecn no	-	
surface	✓	appr	Pei-Ming Zheng	2013/06/28	product family	CARD EDGE	rel level	Released		
linear	0.X ±0.50 0.XX ±0.25 0.XXX ±0.10	title	STRADDLE MT P CONFIG HIGH POWER CARD EDGE - UNIVERSAL	cat. no.	-	Product - Customer Drw	sheet 1 of 4	rev	A	
angular	0° ±0°	www.fci.com								

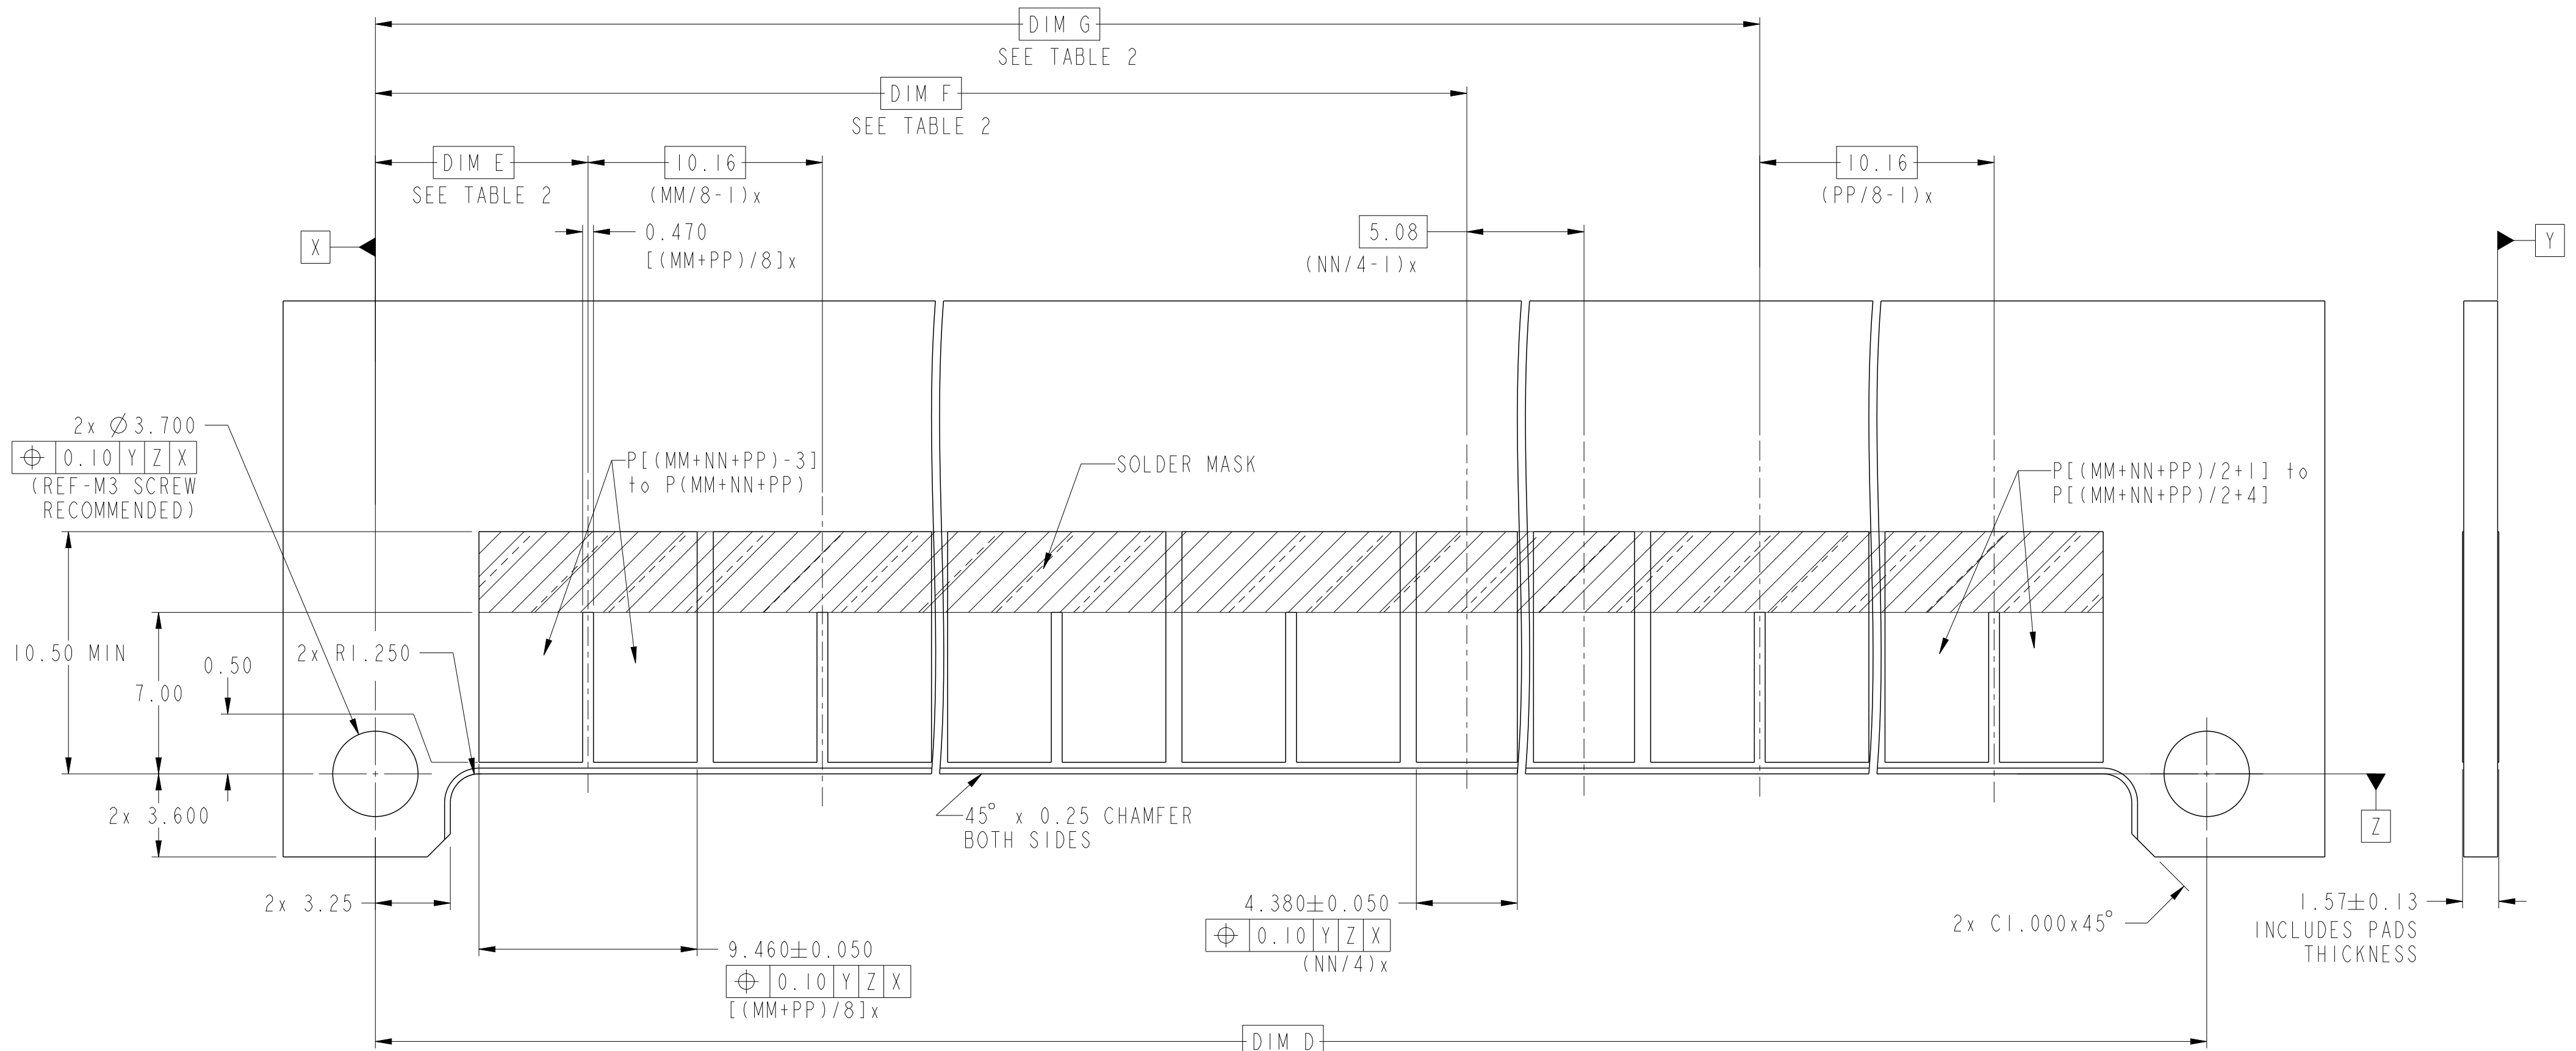

RECOMMENDED HOST BOARD LAYOUT AS VIEWED

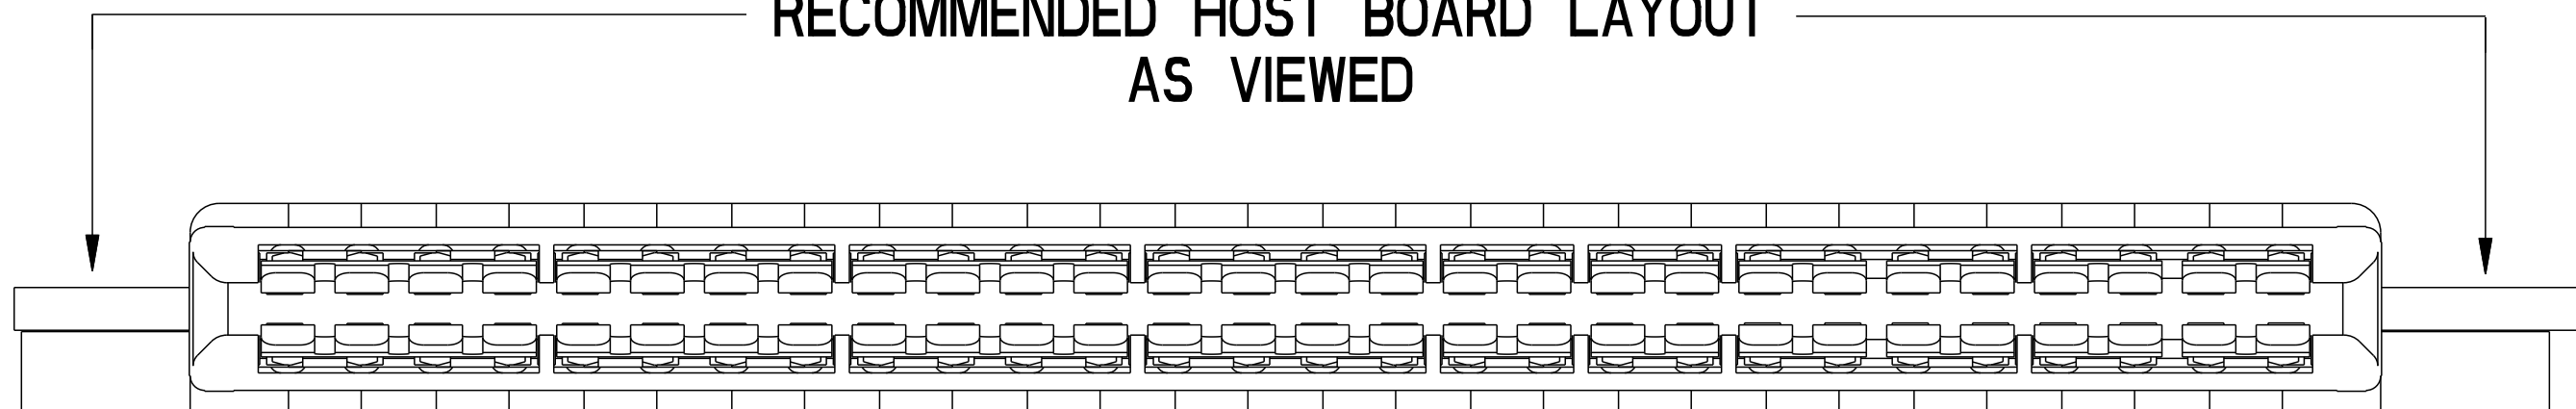


dr	Julia Wang	2013/06/25	projection	MM	size	A2	scale	4:1
eng	Julia Wang	2013/06/28		MM	ecn no	-	rel level	Released
chr	Eleven Hu	2013/06/28						
appr	Pei-Ming Zheng	2013/06/28	product family	CARD EDGE	dwg no	10125136	rev	A
www.fci.com		cat. no.	-	Product - Customer Drw	sheet 2 of 4			

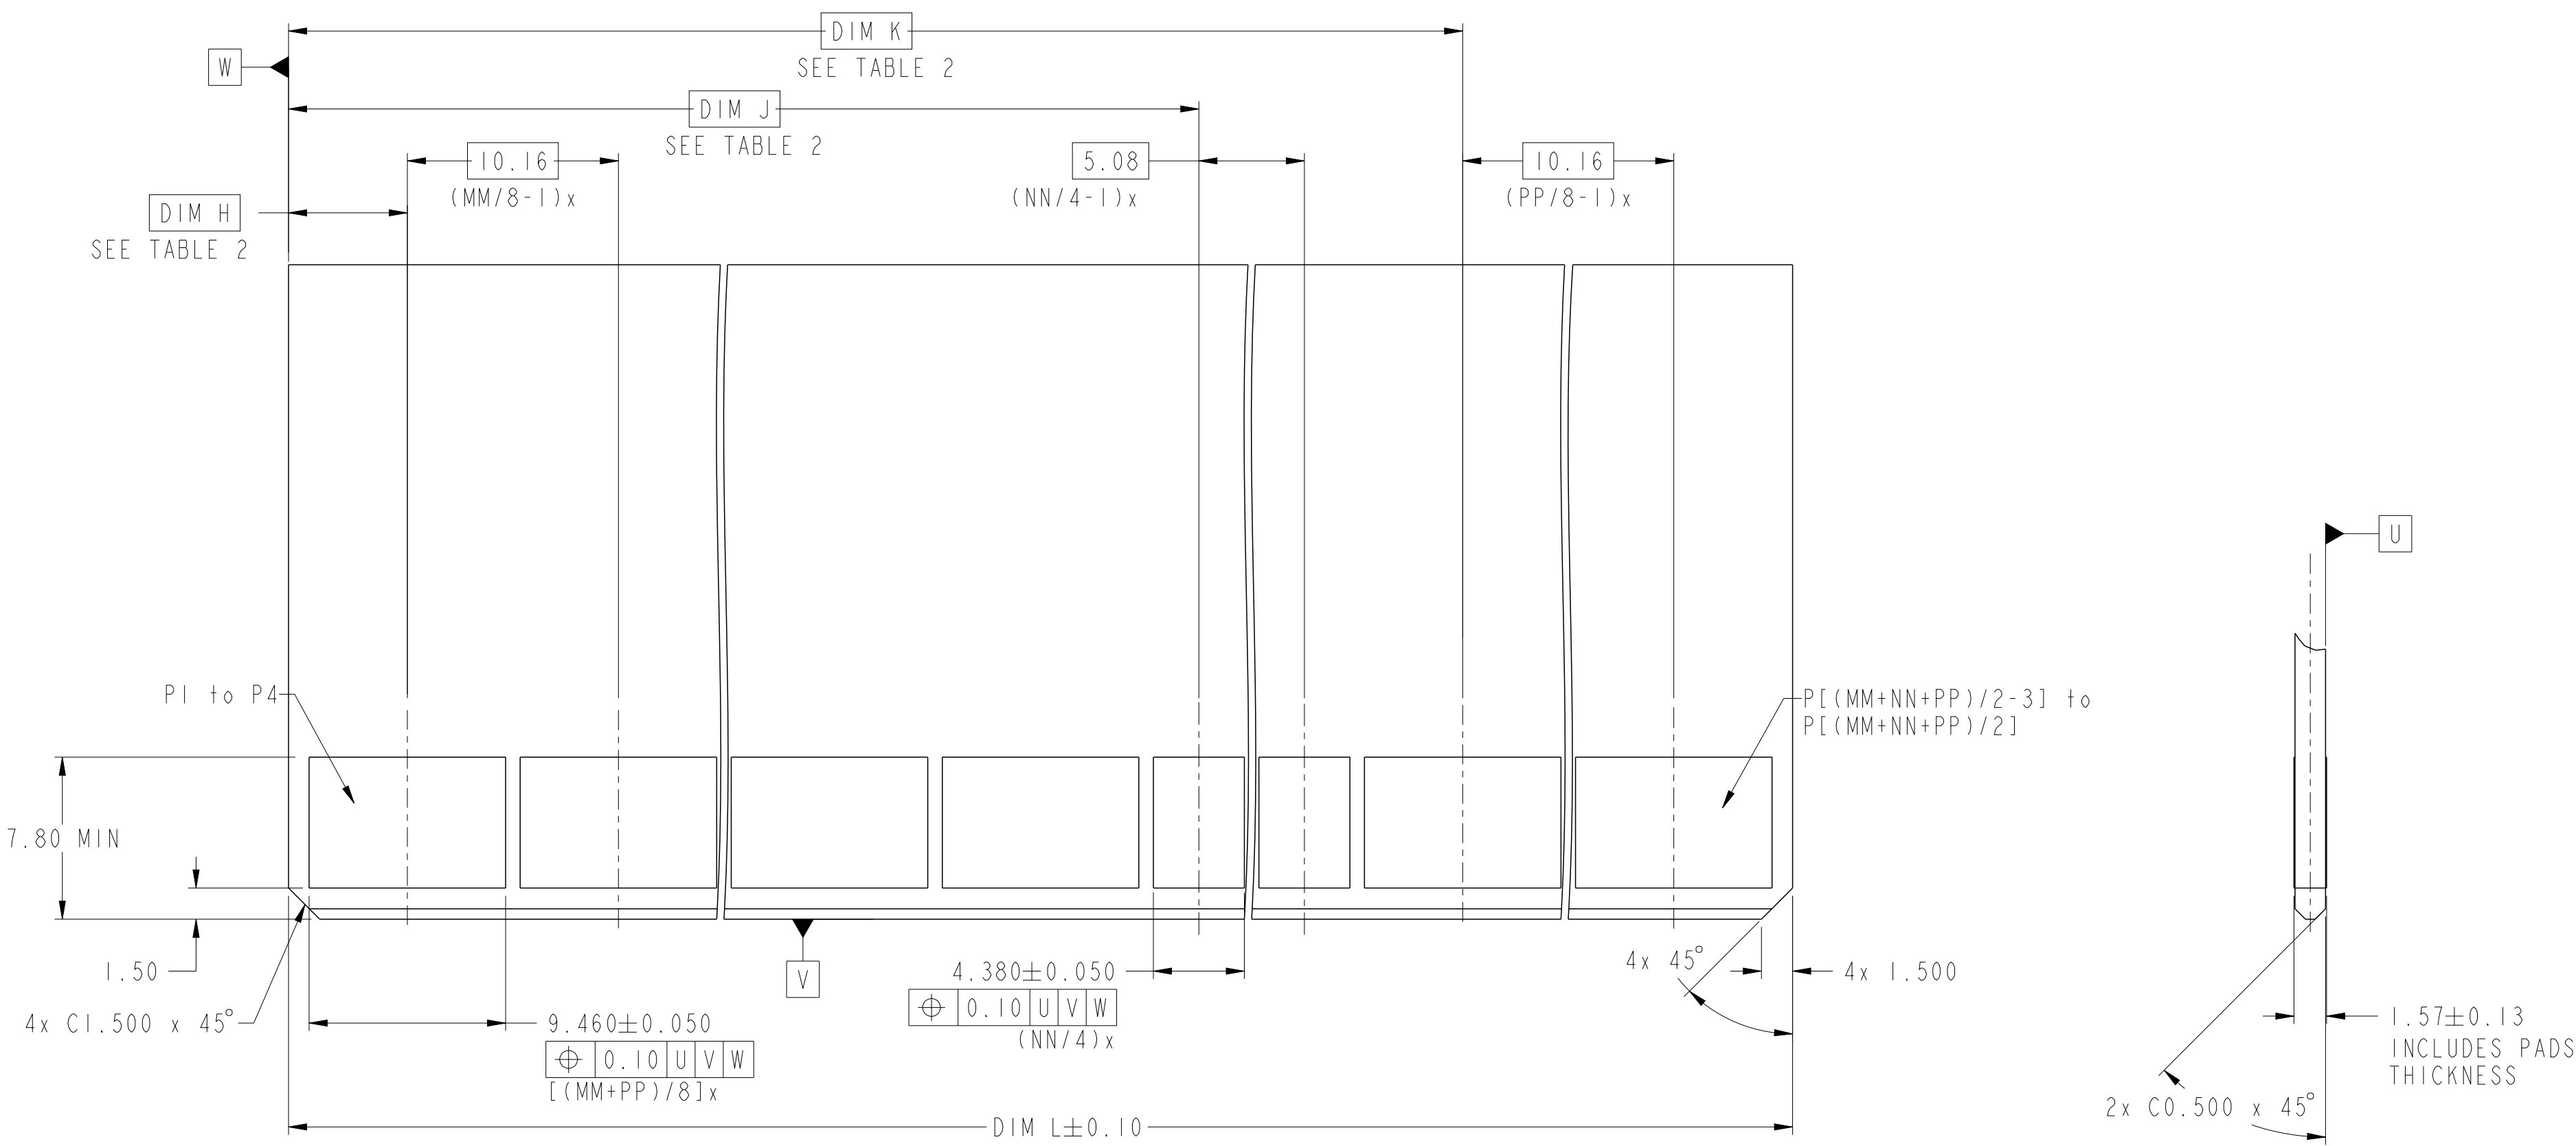

RECOMMENDED MATING BOARD
FOOTPRINT


dr	Julia Wang	2013/06/25	projection 	MM 	size	A2	scale	4:1
eng	Julia Wang	2013/06/28			ecn no	-		
chr	Eleven Hu	2013/06/28			rel level	Released		
appr	Pei-Ming Zheng	2013/06/28			product family		CARD EDGE	
FCI			title		STRADDLE MT P CONFIG			rev
			HIGH POWER CARD EDGE - UNIVERSAL		10125136			A
www.fci.com		cat. no.	-	Product - Customer Drw			sheet 3 of 4	

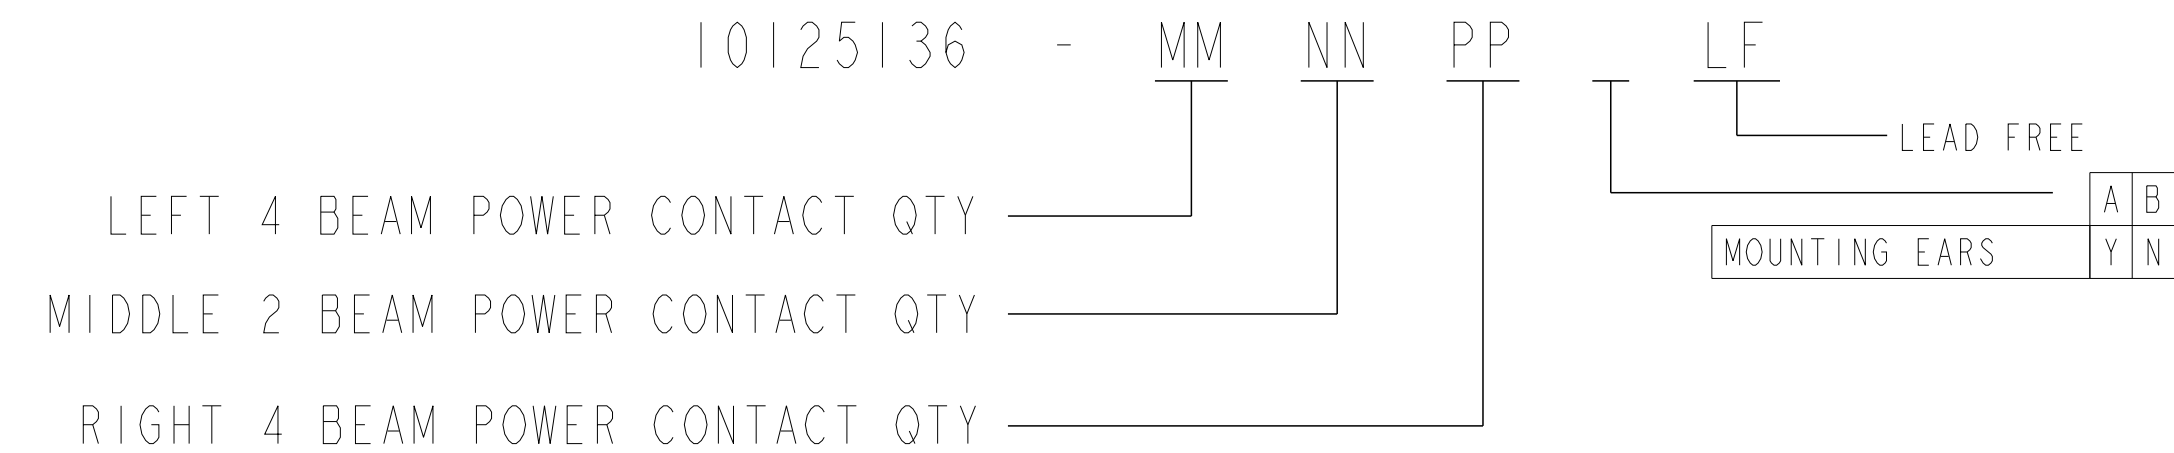

CONFIGURATION:

- I: 4 BEAM (NN = 00 AND PP = 00);
II: 2 BEAM (MM = 00 AND PP = 00);
III: 4 BEAM + 2 BEAM (PP = 00);
IV: 2 BEAM + 4 BEAM (MM = 00);
V: 4 BEAM + 2 BEAM + 4 BEAM.

TABLE 1: PART NUMBER CODE FOR STD HPCE MT P CONFIG

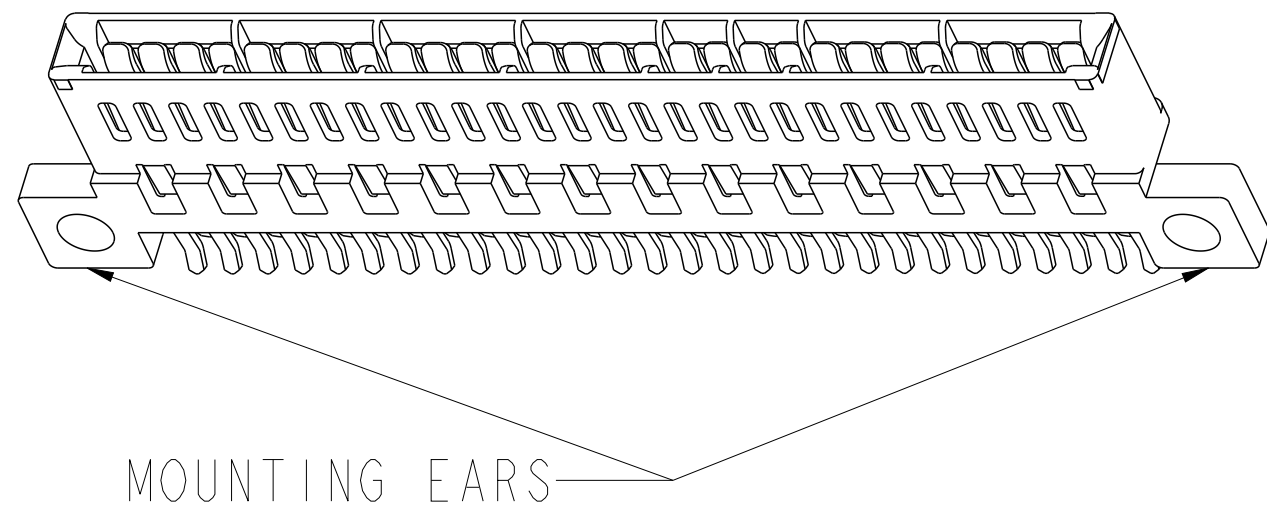

NOTES:

1. CONNECTOR MATERIALS:

HOUSING: HIGH TEMPERATURE THERMAL PLASTIC, BLACK
UL 94V-0 COMPLIANT
CONTACTS: HIGH PERFORMANCE COPPER ALLOY.

2. CONTACT FINISH REF. GS-12-604 SECTION 5.2.

3. PRODUCT SPECIFICATION: GS-12-604.

4. APPLICATION SPECIFICATION: GS-20-128.

5. PRODUCT MARKING (FCI - PART NUMBER & DATE CODE) ON HOUSING IN AREA SHOWN.

6. PACKAGING MEETS FCI SPECIFICATION GS-14-937.

7. HOUSING COMPONENT WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 60 SECONDS IN A CONVECTION, INFRA-RED, OR VAPOR PHASE REFLOW OVEN.

8. MAXIMUM OVERALL LENGTH IS 100mm.

DIM	TABLE 2. LENGTH FORMULAS	
DIM A ⑧	$(MM + NN + PP) / 2 \times 2.54 + 15.78$	
DIM B	DIM A - 14.20	
DIM C	DIM A - 11.54	
DIM D	DIM A - 7.50	
DIM E	CONFIG. I	9.22
	CONFIG. II	-
	CONFIG. III	9.22
	CONFIG. IV	-
	CONFIG. V	9.22
DIM F	CONFIG. I	-
	CONFIG. II	6.68
	CONFIG. III	$(MM / 8 - 1) \times 10.16 + 16.84$
	CONFIG. IV	6.68
	CONFIG. V	$(MM / 8 - 1) \times 10.16 + 16.84$
DIM G	CONFIG. I	-
	CONFIG. II	-
	CONFIG. III	-
	CONFIG. IV	$(NN / 4 - 1) \times 5.08 + 14.30$
	CONFIG. V	$(MM / 8 - 1) \times 10.16 + (NN / 4 - 1) \times 5.08 + 24.46$
DIM H	CONFIG. I	5.72
	CONFIG. II	-
	CONFIG. III	5.72
	CONFIG. IV	-
	CONFIG. V	5.72
DIM J	CONFIG. I	-
	CONFIG. II	3.18
	CONFIG. III	$(MM / 8 - 1) \times 10.16 + 13.34$
	CONFIG. IV	3.18
	CONFIG. V	$(MM / 8 - 1) \times 10.16 + 13.34$
DIM K	CONFIG. I	-
	CONFIG. II	-
	CONFIG. III	-
	CONFIG. IV	$(NN / 4 - 1) \times 5.08 + 10.80$
	CONFIG. V	$(MM / 8 - 1) \times 10.16 + (NN / 4 - 1) \times 5.08 + 20.96$
DIM L	DIM A - 14.50	

dr	Julia Wang	2013/06/25			size	A2	scale	4:1
eng	Julia Wang	2013/06/28			ecn no	-		
chr	Eleven Hu	2013/06/28			rel level	Released		
appr	Pei-Ming Zheng	2013/06/28	product family		CARD EDGE			
			title		dwg no		rev	
			STRADDLE MT P CONFIG		10125136		A	
			HIGH POWER CARD EDGE - UNIVERSAL					
www.fci.com			cat. no.		Product - Customer Drw		sheet 4 of 4	