

Product Search Data Sheet

XRCGB27M120F2C14R0



Applications

Unsuitable	Please be sure to read and comply with
Applications	these "Precautions for use."
	Automotive infotainment/comfort
	equipment
	Please refer to Our Website and
	specifications, etc. for information about
Specific	the performance, functions, quality,
Applications	management, and safety required for
	the above applications, and use
	Products after confirming the
	performance and reliability of the actual
	Product.


Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of XRCGB27M120F2C14R0 from the official website of Murata

http://www.murata.com/en-us/products/productdetail?partno=XRCGB27M120F2C14R0


Packaging Information

Packaging	Specifications	Standard Packing Quantity
R0	180mm Plastic Tape	3000



The crystal unit for automotive electronics that realized small package and highly accurate frequency.

Appearance & Shape

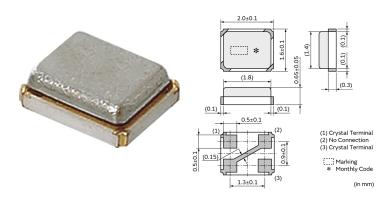

1 of 2

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.





XRCGB27M120F2C14R0

Note: If you have not downloaded this document from our official website, please note that the information provided may not be the most current.

Please download the latest datasheet of XRCGB27M120F2C14R0 from the official website of Murata

http://www.murata.com/en-us/products/productdetail?partno=XRCGB27M120F2C14R0

Specifications

Product Type	Crystal Unit
Series	XRCGB
Туре	HCR2016
Frequency	27.1200MHz
Frequency Tolerance	+/-20ppm max. (25+/-3°C)
Operating Temperature Range	-40°C~105°C
Frequency Shift by Temperature	+/-50ppm max.
Frequency Aging	+/-2ppm max./year
Equivalent Series Resistance (ESR)	80ohm max.
Drive Level (DL)	150µW (300µW max.)
Load Capacitance (Cs)	6pF
Shape	SMD
Wash	Not available
L x W (size)	2.0x1.6mm
Mass	6.9mg

2 of 2

Attention

1. This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued

without advance notice. Please check with our sales representatives or product engineers before ordering.

2. This datasheet has only typical specifications because there is no space for detailed specifications.

Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

