

SK9613

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
8-7 08	NC	ECO 29820	COLE	YK	COLE

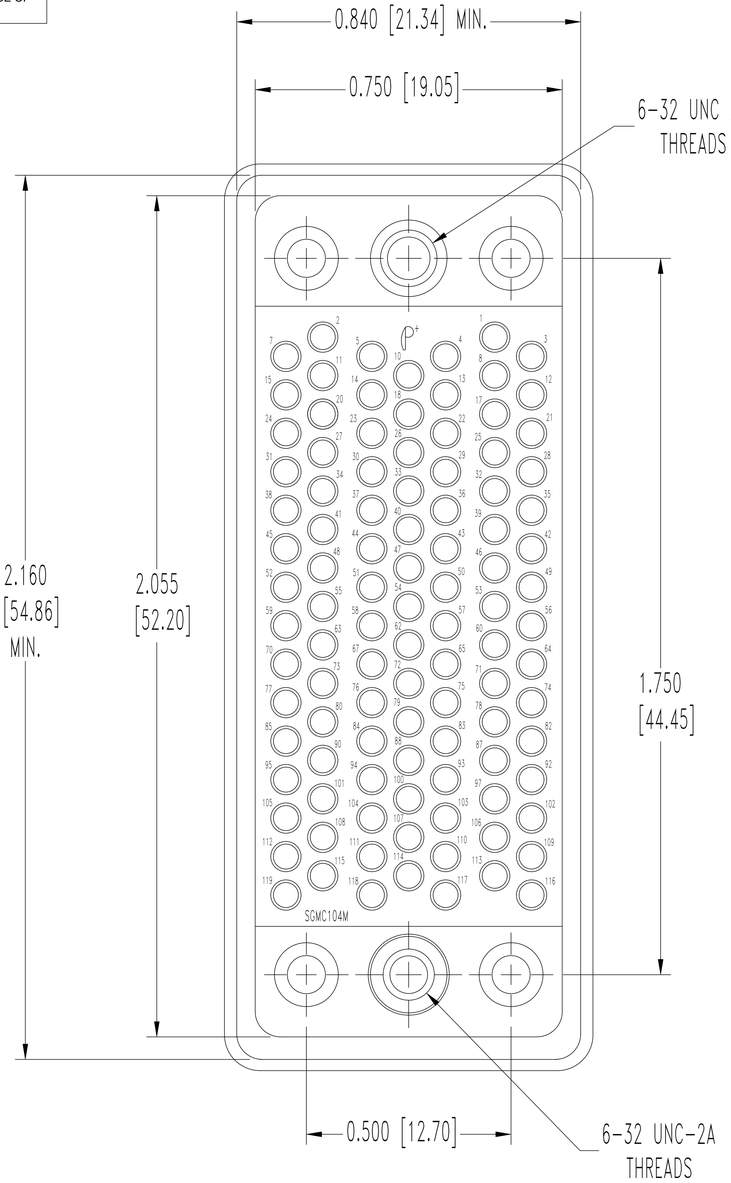

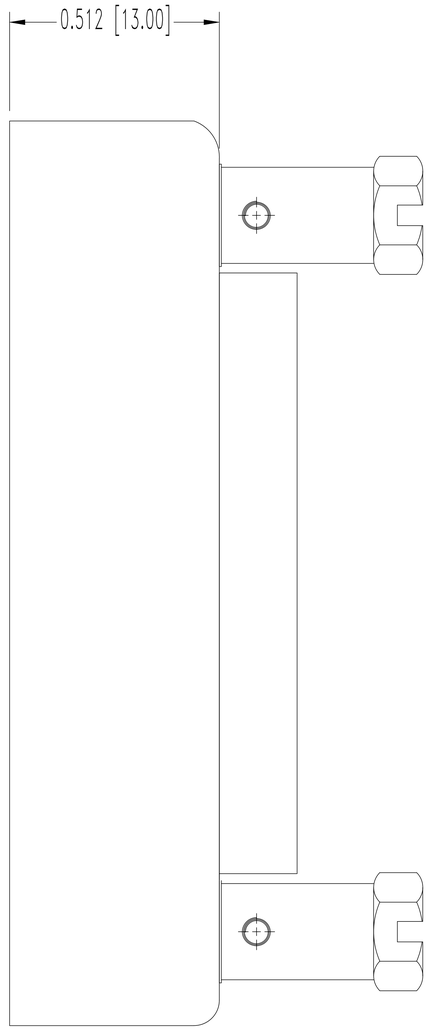

NOTES:

1. MATERIALS AND FINISHES:
   INSULATOR: GLASS FILLED DAP PER ASTM D 5948 TYPE SDG-F, COLOR GREEN.
   SHELL: ALUMINUM, YELLOW ANODIZE.
   KNOBS: STAINLESS STEEL, PASSIVATED.
   POLARIZING GUIDES: STAINLESS STEEL, PASSIVATED.
   ROLL PINS: STAINLESS STEEL, PASSIVATED.
   WASHERS: STAINLESS STEEL, PASSIVATED.
2. ELECTRICAL CHARACTERISTICS:
   INSULATION RESISTANCE: 5 G OHMS MINIMUM.
   WORKING VOLTAGE: 250 V.AC (rms).
3. WORKING TEMPERATURE: -55°C TO +135°C.
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

POSITRONIC INDUSTRIES INC.
SPRINGFIELD, MISSOURI 65801

DECIMAL TOL. ±0.015 [0.38]	SGMC SERIES	SCALE N.T.S.	DRAWN BY YK
			APPROVED BY S COLE
	TITLE SGMC104M0ER000		
ANGULAR TOL. ±5°	DATE 8-7-08	DRAWING NUMBER SK9613	REV. NC

Downloaded from Arrow.com.