
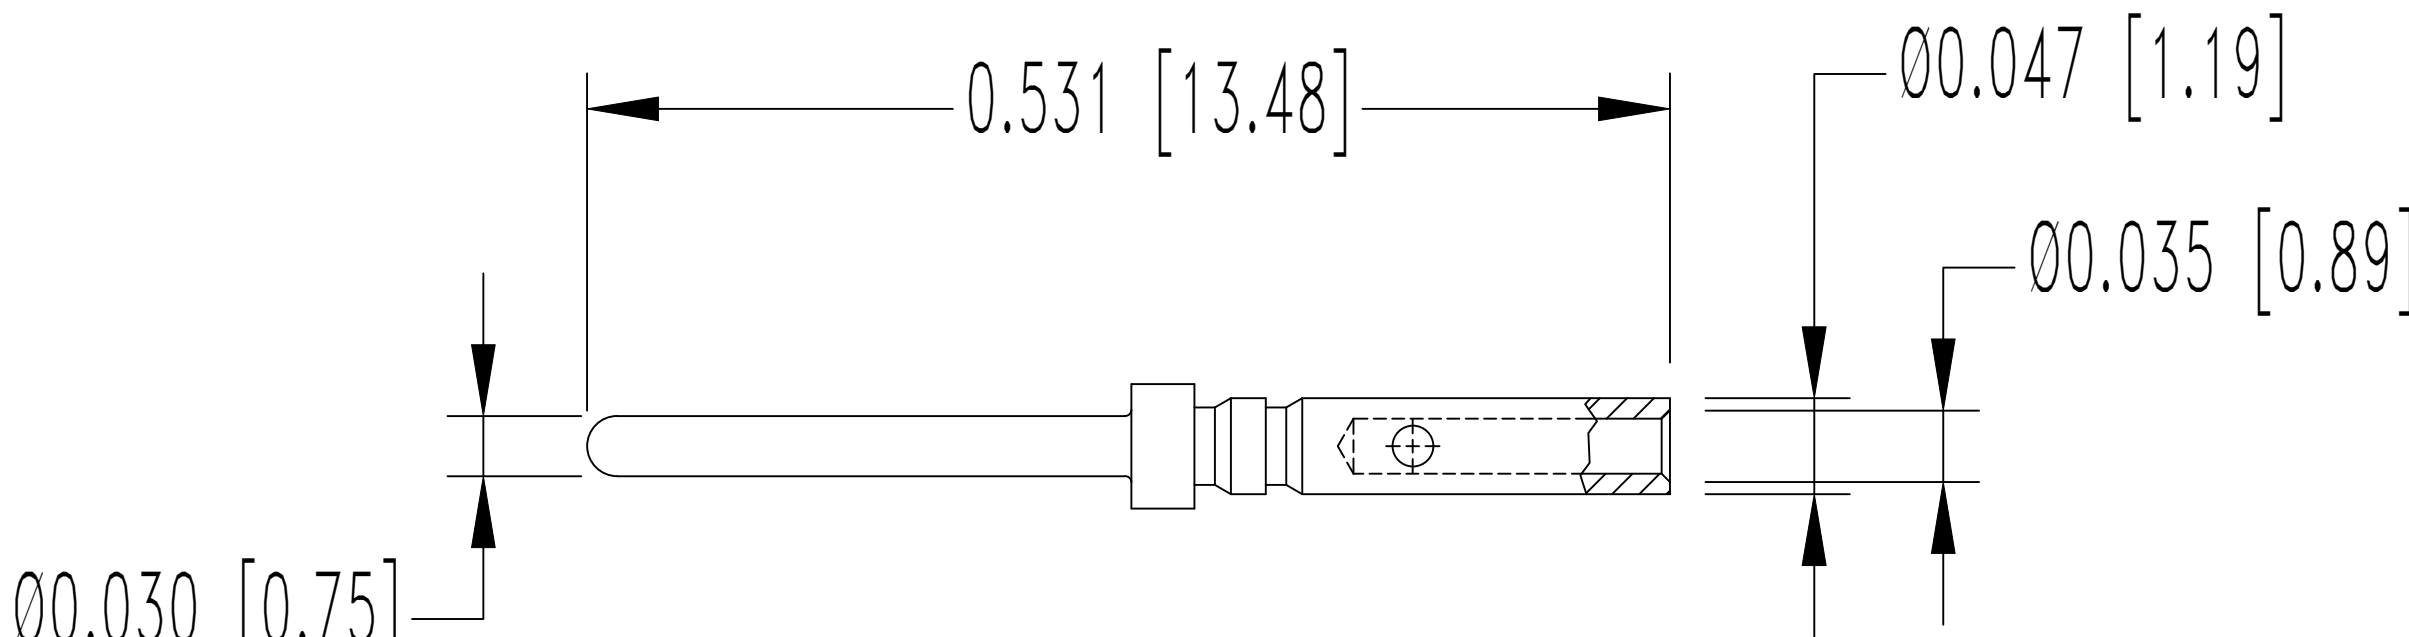
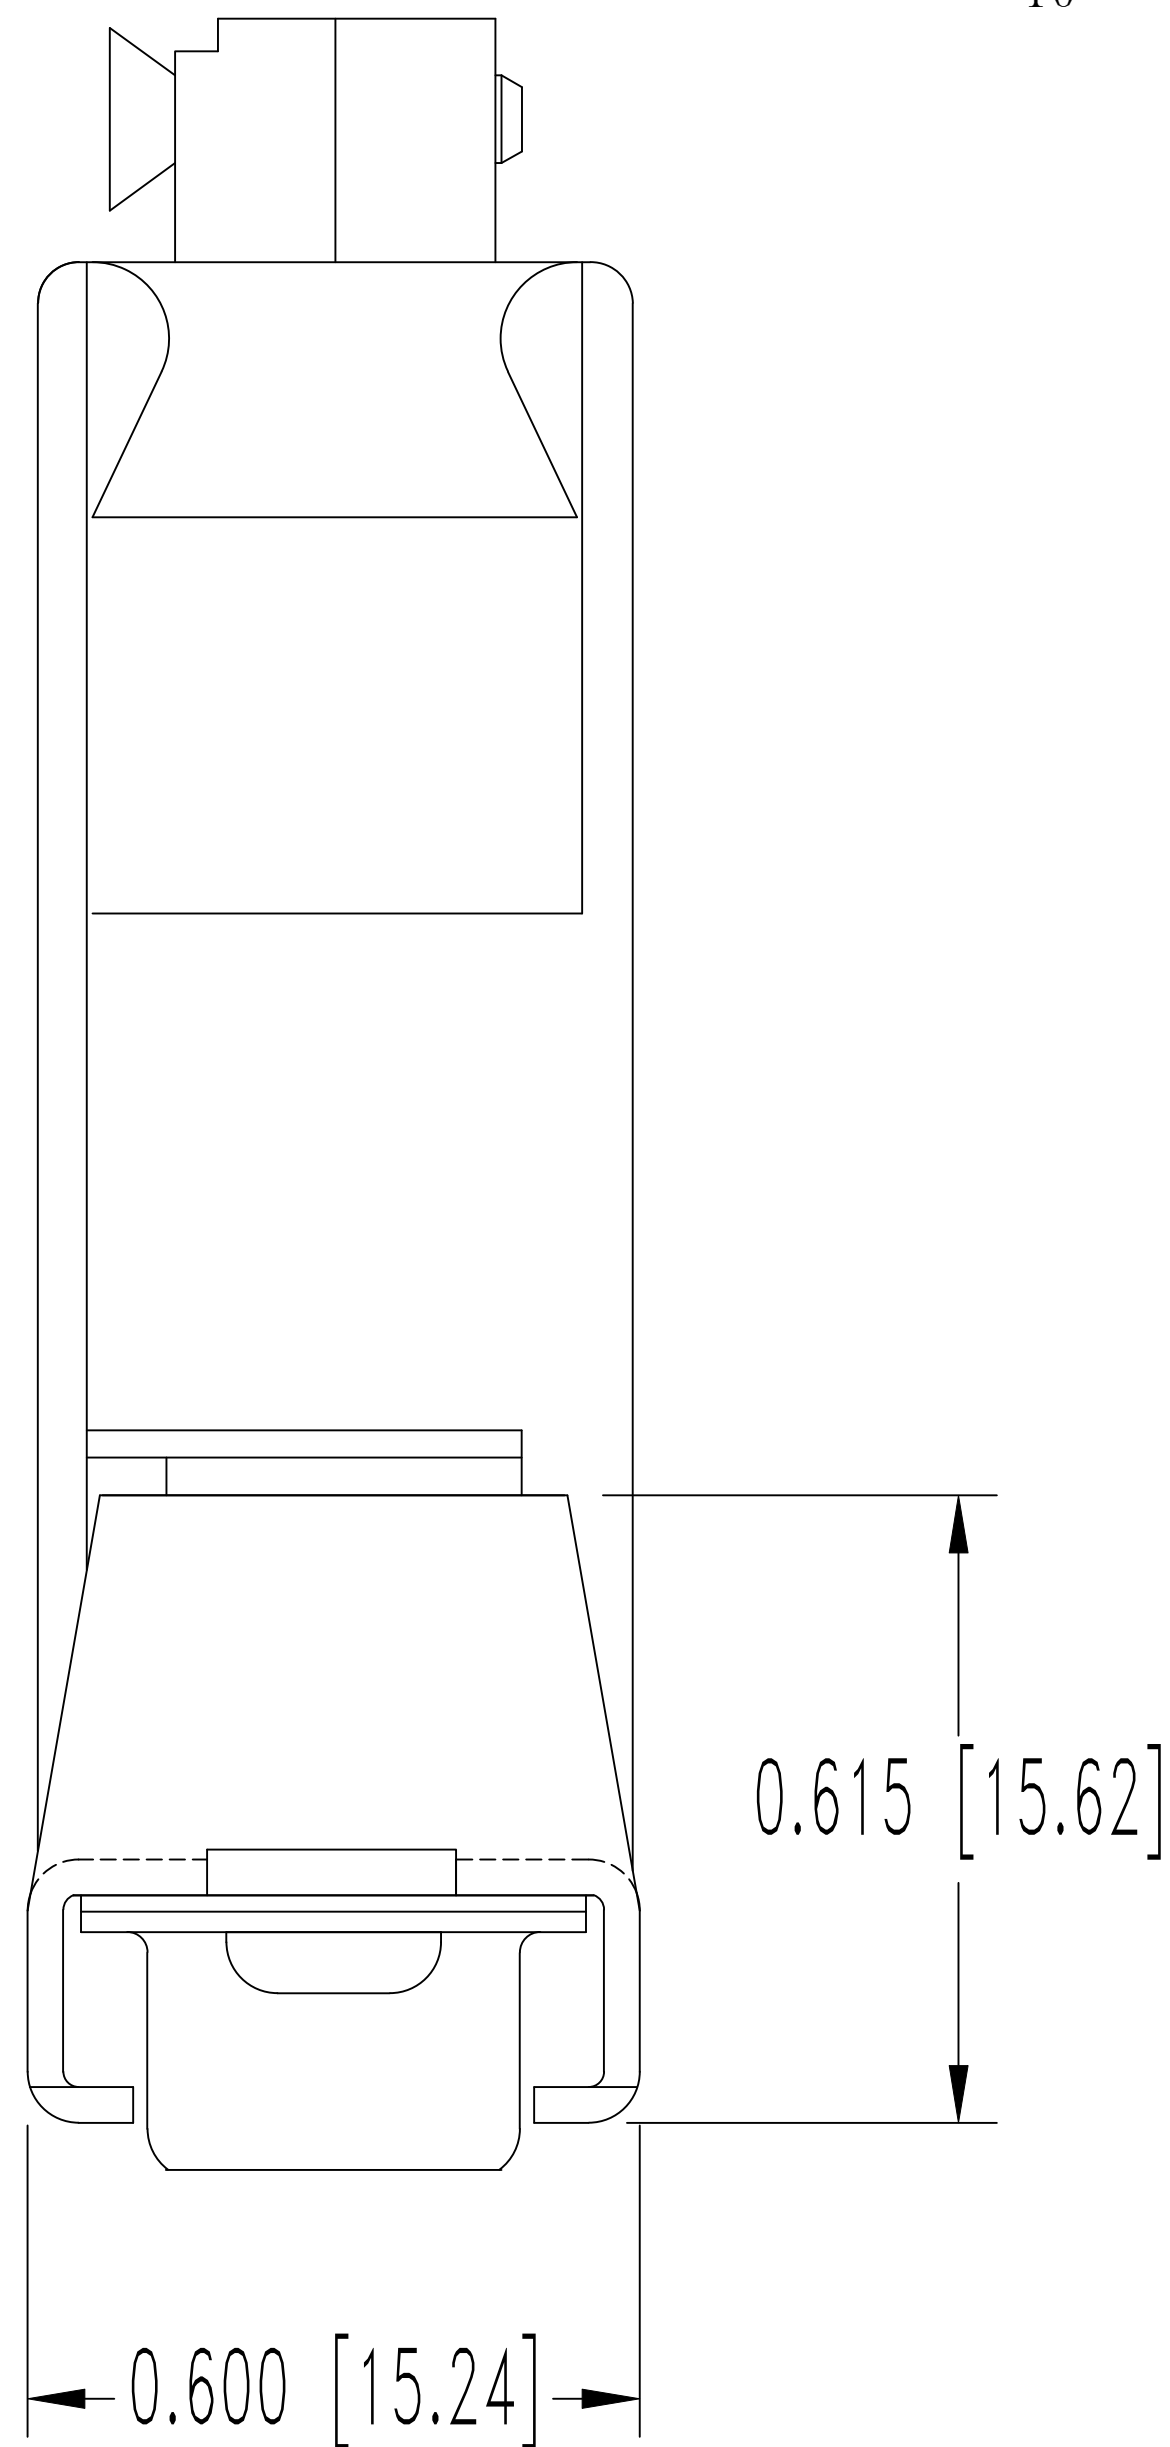
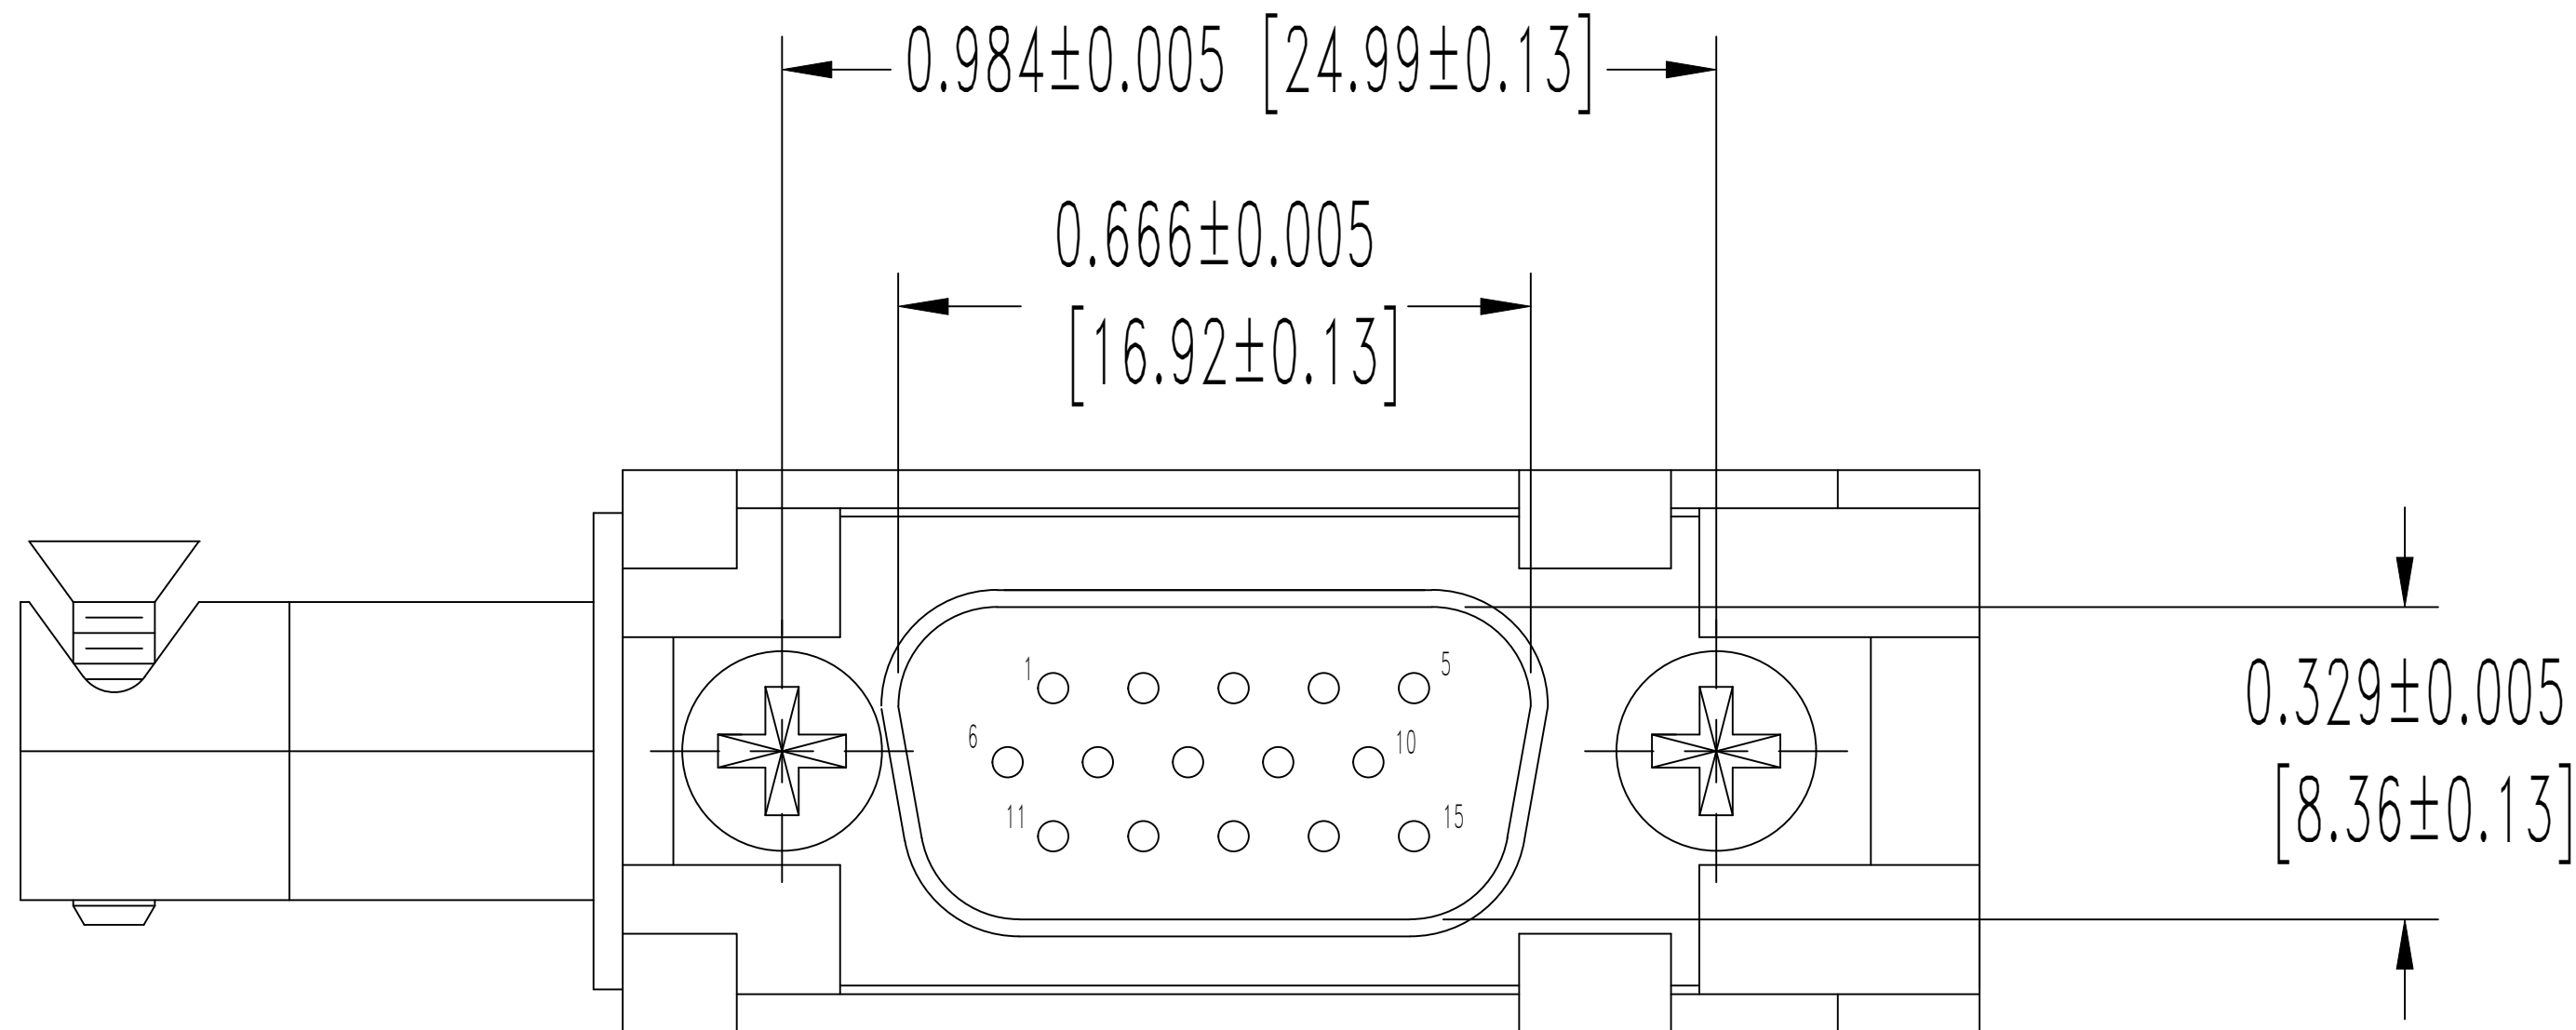


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND ITS SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE. THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK6348


DATE	REV	REVISION RECORD		APP	DR	CK
7-19 05	NC	ECO	24358	RCW	YK	COLE
1-9 07	A	ECO	27305	RW	YK	COLE
3-30 10	B	ECO	32305	TK	BE	TK

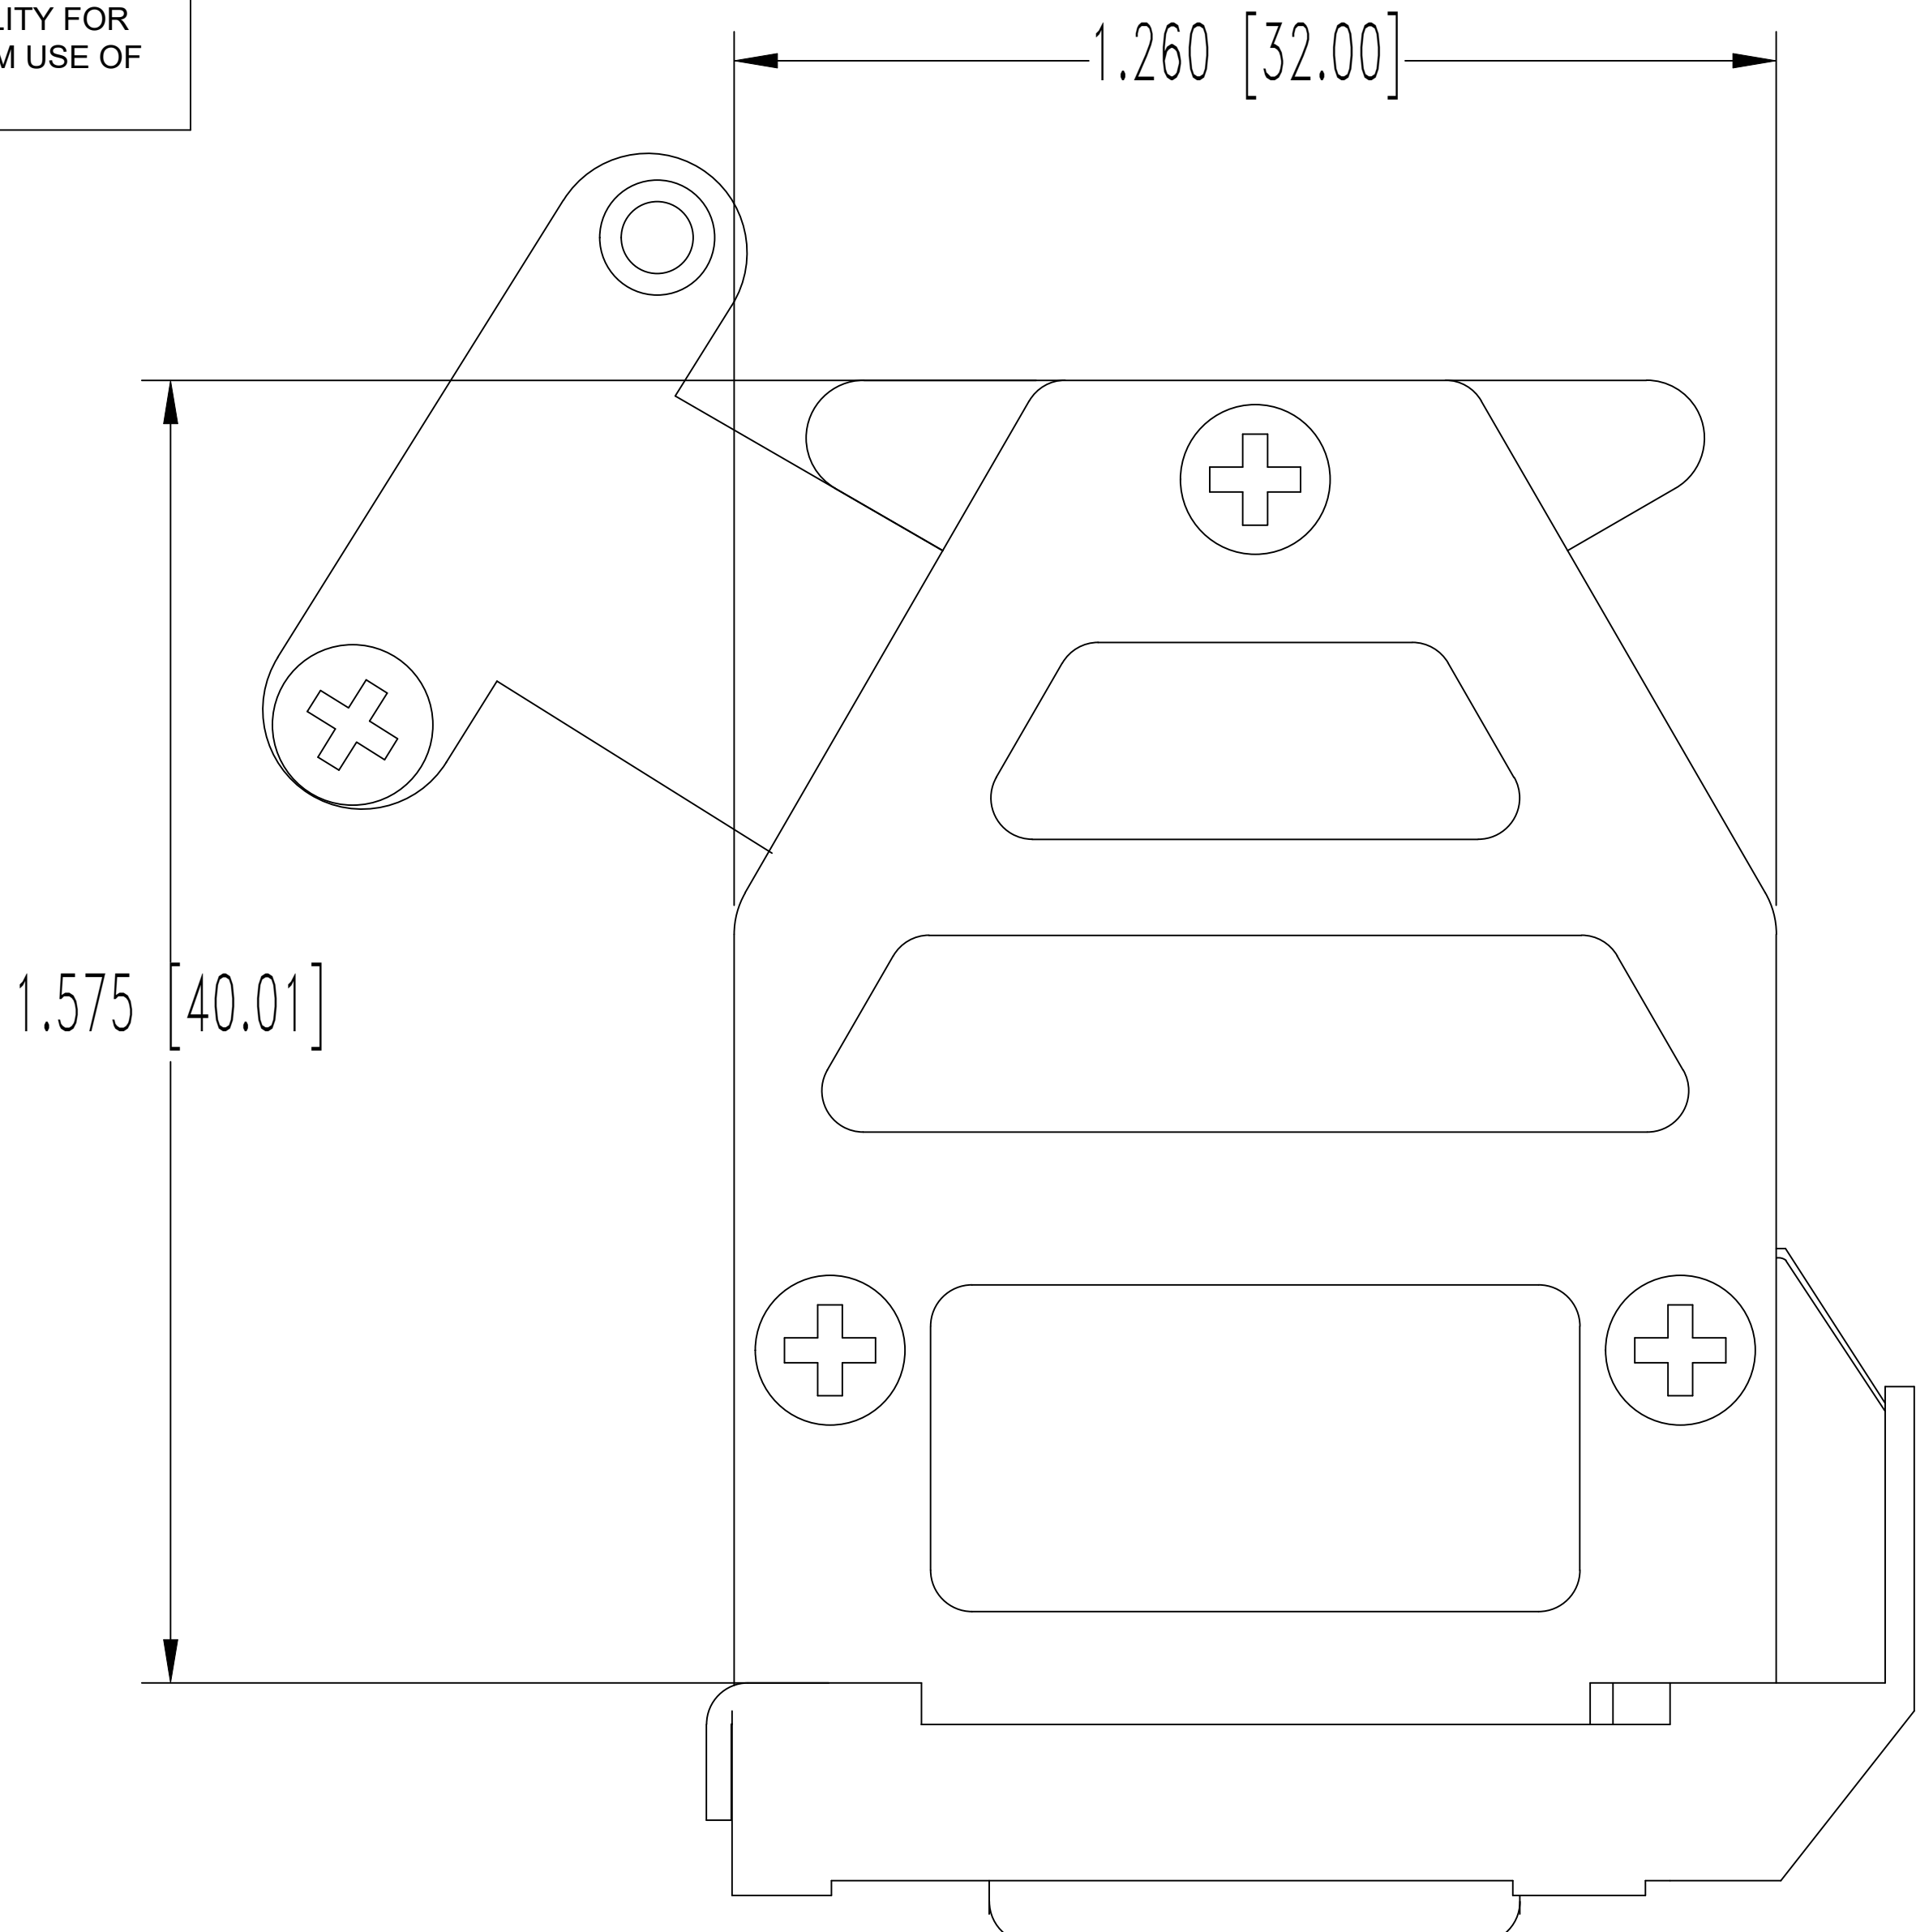


MALE CONTACT
15X (ENLARGED)

NOTES:

- MATERIALS AND FINISHES:
INSULATOR: GLASS FILLED POLYESTER PER ASTM D5927, UL 94V-0, COLOR BLUE.
CONTACTS: BRASS, 0.000050 [1.27μ] GOLD OVER COPPER PLATE.
SHELLS: STEEL, ZINC PLATE WITH DICHROMATE SEAL.
HOOD: ZINC, DIE CAST.
CABLE CLAMPS: ZINC, DIE CAST.
LOCK LEVER: STEEL, NICKEL PLATE.
SCREWS: STEEL, NICKEL PLATE.
MOUNTING SCREWS: STAINLESS STEEL, PASSIVATED.
- DETAILED PRODUCT, ELECTRICAL, AND MECHANICAL INFORMATION IS AVAILABLE IN THE LATEST HIGH DENSITY D-SUBMINIATURE PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/59/HIGHDENSITYD-SUBMINIATURE OR CONNECTPOSITRONIC.COM.
- DIMENSIONS ARE IN INCHES [MILLIMETERS].

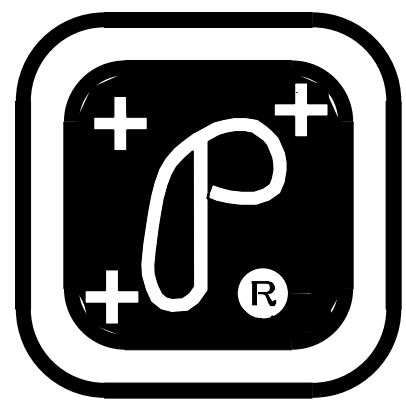

POSITRONIC INDUSTRIES INC.
SPRINGFIELD, MISSOURI 65801

	DD SERIES		SCALE	DRAWN BY	
DECIMAL TOL. ± 0.015 [0.38]			N.T.S.	YK	
	APPROVED BY				
	RCW				
	TITLE				
	DD15M10GVLO				
ANGULAR TOL. ± 5°	DATE	DRAWING NUMBER			REV.
	7-19-05	SK6348			B