**MICRO SWITCH**
a Honeywell Division
FED.MFG.CODE 91929

# SWITCH – BASIC

CATALOG LISTING
BZ–7RW82135–A2

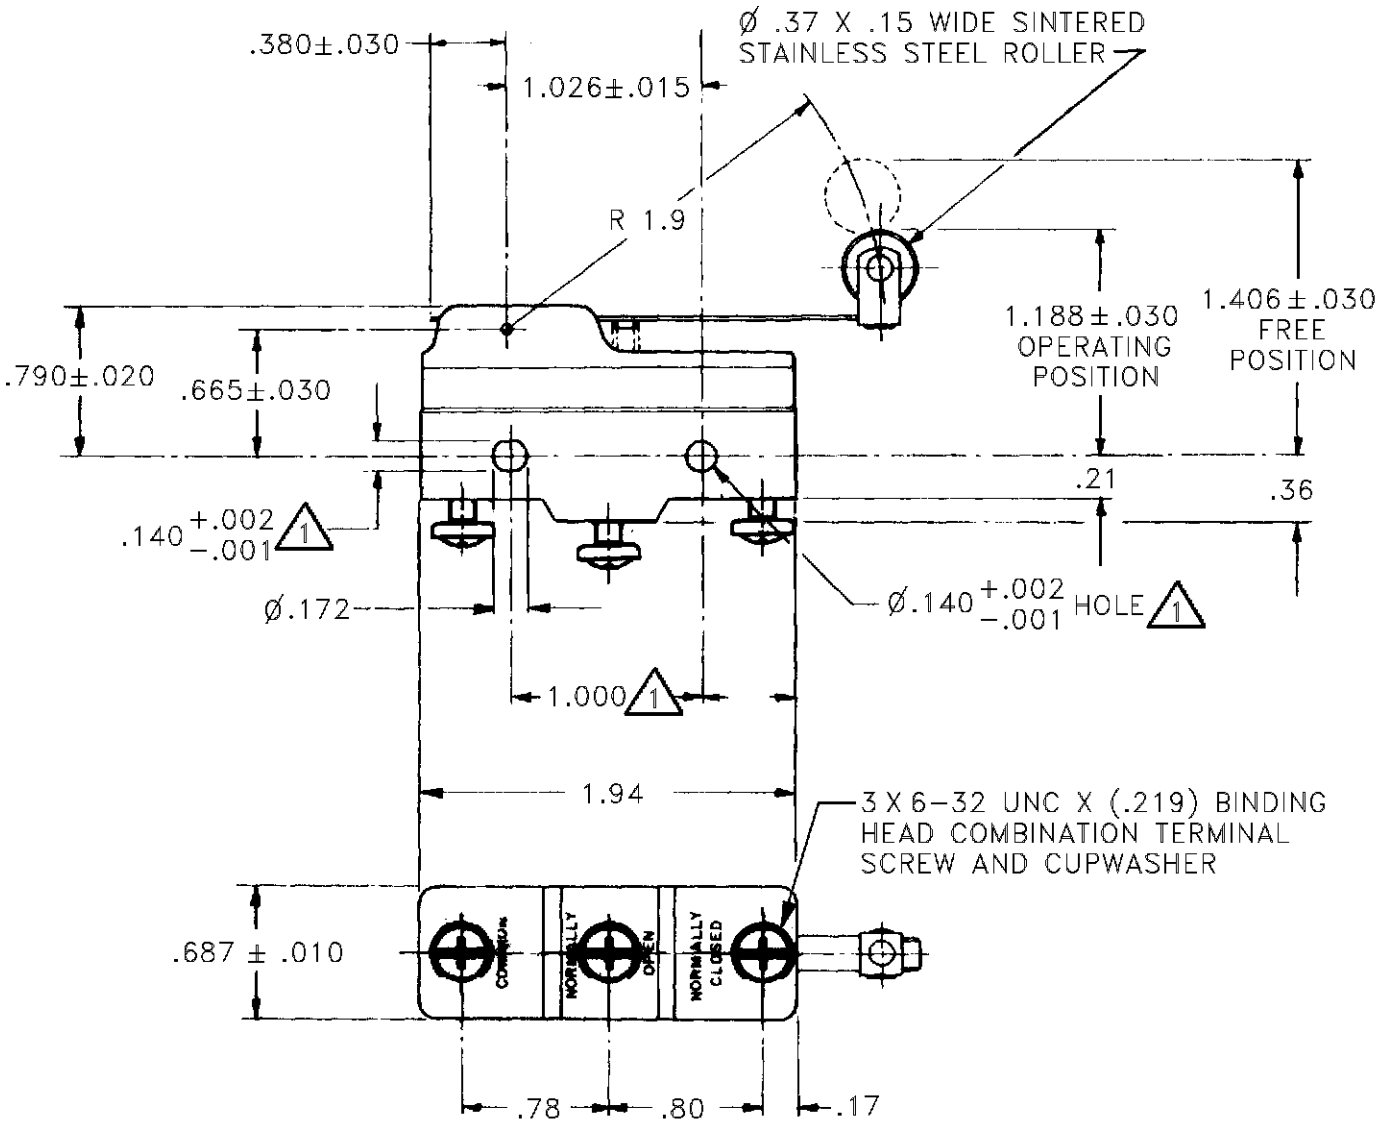


NOTE
1. MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OR .139 MAX DIA ON 1.000±.002 CENTERS

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION

## CHARACTERISTICS

OPERATING FORCE — — 3 1/2 OZ MAX
RELEASE FORCE — — — — 3/4 OZ MIN
DIFFERENTIAL TRAVEL — — .074–.110
OVERTRAVEL — — — — — — .156 MIN

## ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L96
15A 125, 250 OR 480 VAC
1/8HP 125 VAC, 1/4HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC

L288
L299
L306
16A 250V ~ T85 5E4

SCALE — DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

| | | |
|---|---|---|
| ONE PLACE | (.0) | ±.030 |
| TWO PLACE | (.00) | ±.015 |
| THREE PLACE | (.000) | ±.005 |
| ANGLES | | ± |

WEIGHT .076 LB

REPLACES X98962–BZ
RELEASE NO. PR–21622
CATALOG LISTING BZ–7RW82135–A2
PAGE 1 OF 1
ISSUE 2
CHECK
REVISIONS
A C093346 DLT 20 SEP 98
CHECK
21 APR 95 JALA
CHECK
21 APR 95 JALA
DRAWN
FORMTEK

Downloaded from Arrow.com.