

SK4062

THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
11-26-01	NC	ECO 18671	RCW	YK	COLE
3-11-10	A	ECO 32232	COLE	BS	COLE

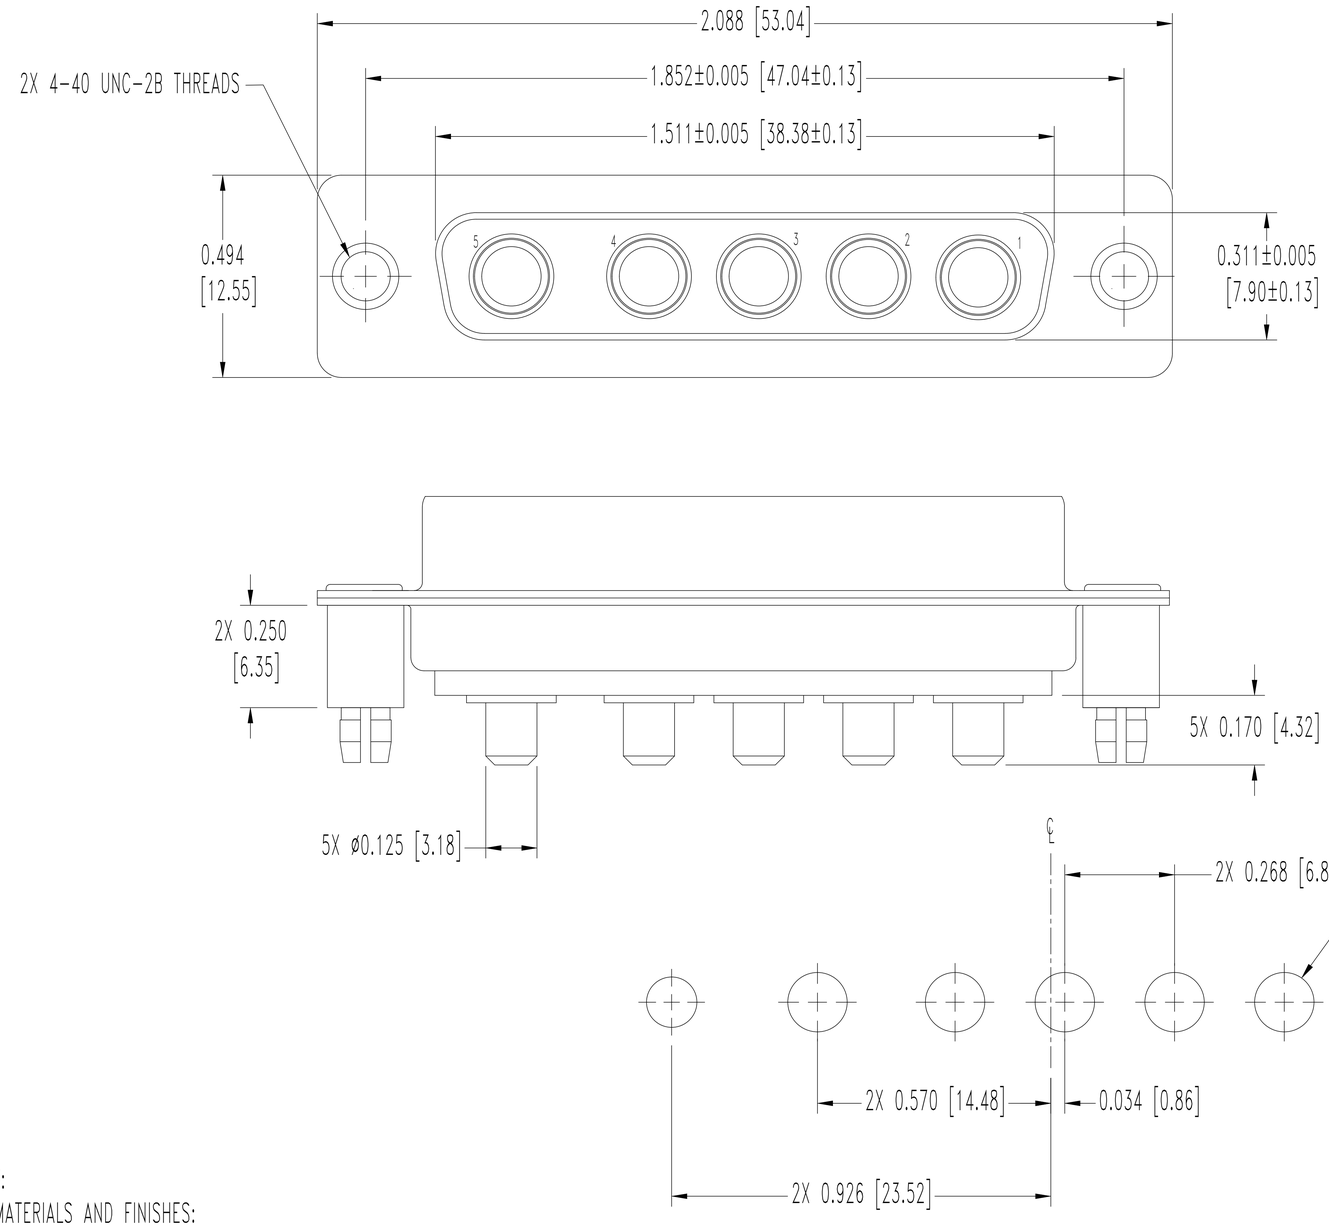

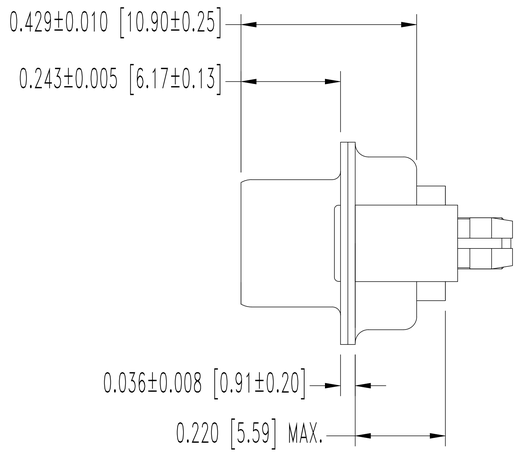

CONTACT HOLE PATTERN

NOTES:

1. MATERIALS AND FINISHES:
   INSULATOR: GLASS FILLED POLYESTER PER ASTM-D5927 UL 94V-0, COLOR: BLUE.
   SHELLS: STEEL WITH TIN PLATE.
   CONTACTS: PRECISION MACHINED COPPER ALLOY, GOLD FLASH OVER NICKEL PLATE.
   MOUNTING SPACERS: STEEL WITH TIN PLATE.
2. DETAILED PRODUCT, MECHANICAL, AND ELECTRICAL INFORMATION IS AVAILABLE IN THE LATEST STANDARD DENSITY COMBO-D PRODUCT PUBLICATION. VISIT CONNECTPOSITRONIC.COM/PRODUCTS/1/STANDARDDENSITYCOMBO-D OR CONNECTPOSITRONIC.COM.
3. DIMENSIONS ARE IN INCHES [MILLIMETERS].

POSITRONIC INDUSTRIES INC.
SPRINGFIELD, MISSOURI 65801

DECIMAL TOL. ±0.015 [0.38]	CBD SERIES	SCALE N.T.S.	DRAWN BY Y. KELLEYBREW
WF # 4193	TITLE CBD5W5F37S600X		APPROVED BY R WILLIAMS
ANGULAR TOL. ±5°	DATE 11-26-01	DRAWING NUMBER SK4062	REV. A

Downloaded from Arrow.com.