
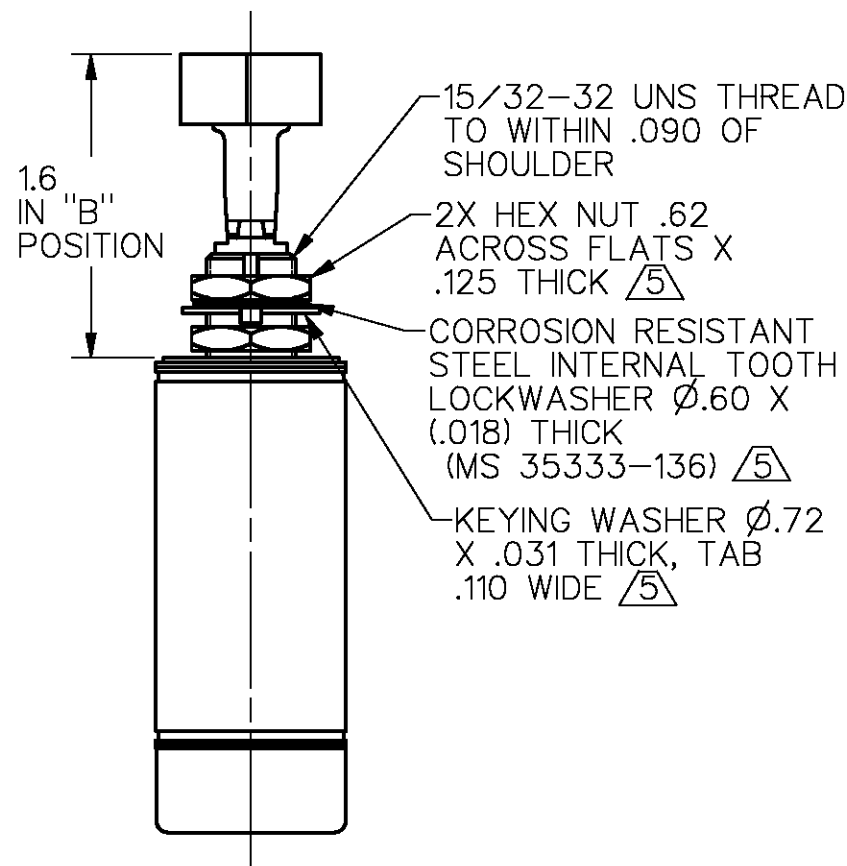
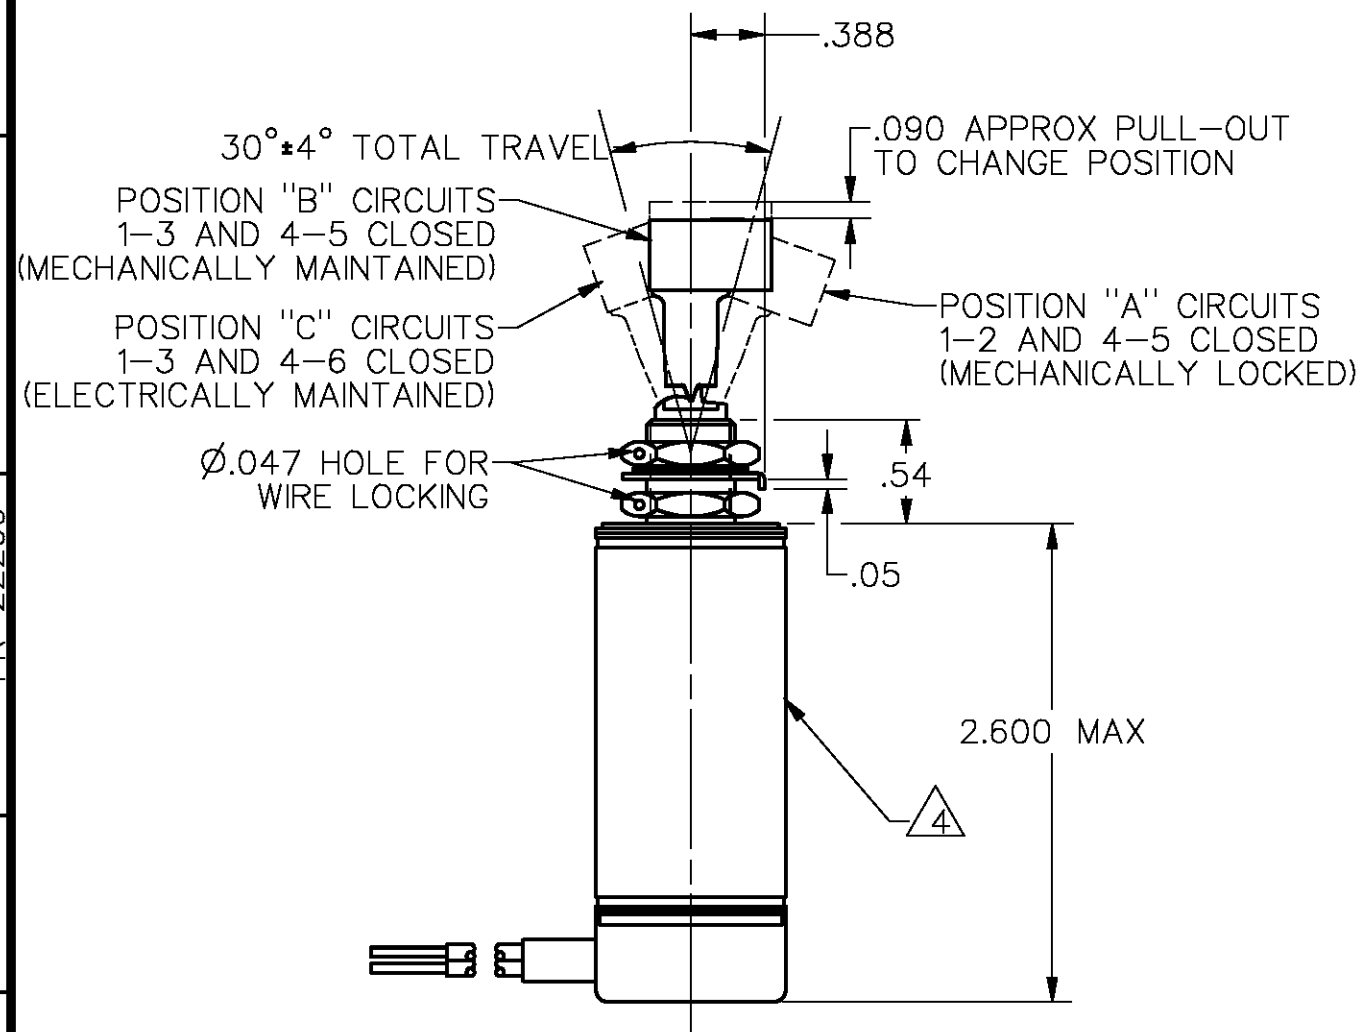
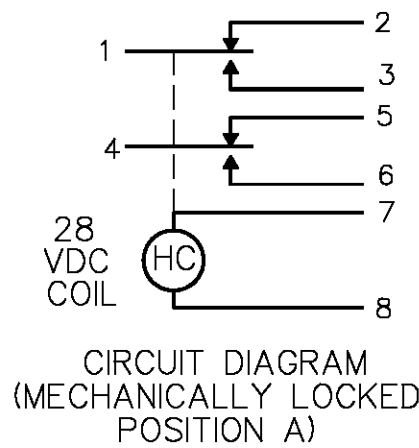


8X NO.20 WIRE LEAD PER MIL-W-22759/7
MARKED WITH CIRCUIT IDENTIFICATION AND
WIRE GAGE (1-20, 2-20, ETC) PER MIL-W-5088

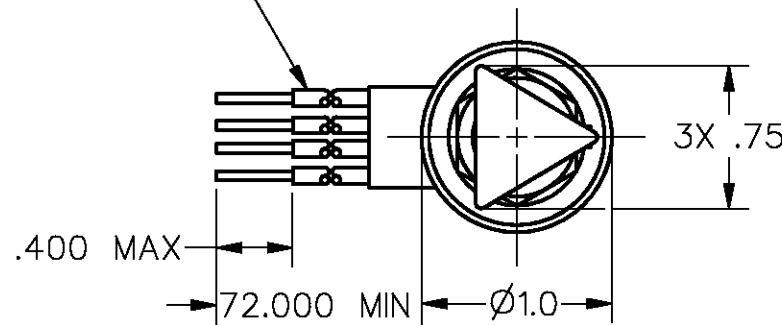

- NOTES
- 1 - CIRCUITS CAN BE TRANSFERRED MANUALLY. ENERGIZING THE COIL WILL NOT CAUSE TRANSFER OF CIRCUITS
 - 2 HOLD IN VOLTAGE: THE MINIMUM SPECIFIED VOLTAGE AT WHICH THE LEVER WILL REMAIN ACTUATED. HOLD IN MAY OCCUR AT A LOWER VALUE. DROP OUT VOLTAGE: THE VOLTAGE RANGE IN WHICH THE LEVER WILL BE RELEASED
 - 3 CONTACT HONEYWELL-MICRO SWITCH IF ADDITIONAL INFORMATION ON LOW ENERGY LOADS IS REQUIRED OR FOR HELP WITH SPECIFIC APPLICATIONS
 - 4 SWITCH LABEL TO SHOW: MICRO SWITCH, FEDERAL MANUFACTURING CODE, CATALOG LISTING, CIRCUIT DIAGRAM AND DATE CODE
 - 5 HARDWARE MAY BE FURNISHED UNASSEMBLED PER MIL-S-5594

MASTER REDUCED
ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

MICRO SWITCH
a Honeywell Division

SWITCH - TOGGLE
(MAGNETIC HOLD-IN)

CATALOG LISTING
27ET50-6-P

FED. MFG. CODE 91929

M 27ET50-6-P

SPECIFICATION DETAILS:			
STANDARD:		CONFORMS TO MIL-S-5594	
CONSTRUCTION:			
ENCLOSURE DESIGN		SEALED TO 1 X 10-6 ATM * CC/S PER MIL-S-5594 PARA. 3.12 & 4.9.8	
SEAL MATERIAL		SILICONE RUBBER	
CONTACT MATERIAL & CONFIGURATION		SMOOTH GOLD PLATED SILVER CONTACTS <u>3</u>	
CIRCUIT CONFIGURATION		2X S P D T	
TERMINATION		20 GAGE MIL-W-22759/7	
WEIGHT		14 ozf (4.0N) MAX	
EXPOSED METALS		CORROSION RESISTANT OR SUITABLY PROTECTED TO PREVENT CORROSION	
ENCLOSURE PAINT		BLUE EPOXY BASED ENAMEL COLOR NO. 25184 PER FEDERAL STANDARD 595	
ELECTRICAL CHARACTERISTICS:			
ELECTRICAL RATINGS		VOLTAGE	INDUCTIVE RESISTIVE
-SEA LEVEL		28 VDC	2A 7A
-65,000 FEET		28 VDC	1.5A 5A
DIELECTRIC STRENGTH & INSULATION RESISTANCE		DIELECTRIC STRENGTH INSULATION RESISTANCE	
		(≈60 Hz FOR 5 SECONDS)	
-BETWEEN ALL TERMINALS AND EXPOSED NON-CURRENT CARRYING METAL OR GROUND PARTS		1000 V Rms, 1000 μA (MAX LEAKAGE) N/A	
-BETWEEN ALL TERMINALS OF MUTUALLY INSULATED CIRCUITS, INCLUDING BETWEEN POLES		1000 V Rms, 1000 μA (MAX LEAKAGE) N/A	
-BETWEEN ALL UNCONNECTED TERMINALS OF THE SAME POLE		1000 V Rms, 1000 μA (MAX LEAKAGE) N/A	
SWITCH RESISTANCE		N/A	
RECOMMENDATION OR USE IN APPL LESS THAN .5 amps AND/OR 12 volts		YES <u>3</u>	
MECHANICAL CHARACTERISTICS: <u>2</u>			
STEADY STATE LIMITS		20-30 VDC	
HOLD IN VOLTAGE		15 VDC	
DROP OUT VOLTAGE		1.5-15 VDC	
OPERATING FORCE AT 30 VDC		7lbf (31, 1 N) MAX	
OVERRIDE FORCE AT 30 VDC		10lbf (44, 5 N) MAX	
SOLENOID RESSITANCE AT 30 VDC AND 68°F (20°C)		220 OHMS MIN	
MOUNTING STRENGTH		15lbf-IN (1,7 NM) MAX	
ACTUATING STRENGTH		25lbf (111,2N) PER MIL-S-5594 PARA. 3.8 & 4.9.4.A 15lbf (66,7N) PER MIL-S-5594 PARA. 3.8 & 4.9.4.B	
LIFE:			
MECHANICAL LIFE		40,000 CYCLES MIN PER MIL-S-5594 PARA. 3.10 & 4.9.6	
ELECTRICAL LIFE AT FULL RATED LOAD		20,000 CYCLES MIN PER MIL-S-5594 PARA. 3.11 & 4.9.7	
ENVIRONMENTAL:			
TEMPERATURE RANGE		-85°F (-65°C) TO +160°F (+71°C)	
ALTITUDE RANGE		SEA LEVEL TO 65,000 FT	
SHOCK		PER MIL-S-5594 PARA. 3.14 & 4.9.10	
VIBRATION		PER MIL-S-5594 PARA. 3.13 & 4.9.9	
MOISTURE RESISTANCE		PER MIL-S-5594 PARA. 3.17 & 4.9.13	
ACCELERATION		PER MIL-S-5594 PARA. 3.15 & 4.9.11	
SALT SPRAY		PER MIL-S-5594 PARA. 3.16 & 4.9.12	
SAND AND DUST		PER MIL-S-5594 PARA. 3.18 & 4.9.14	
EXPLOSION		PER MIL-S-5594 PARA. 3.19 & 4.9.15	

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACES	(.00)	±.015
THREE PLACES	(.000)	±.005
ANGLES		±

WEIGHT