


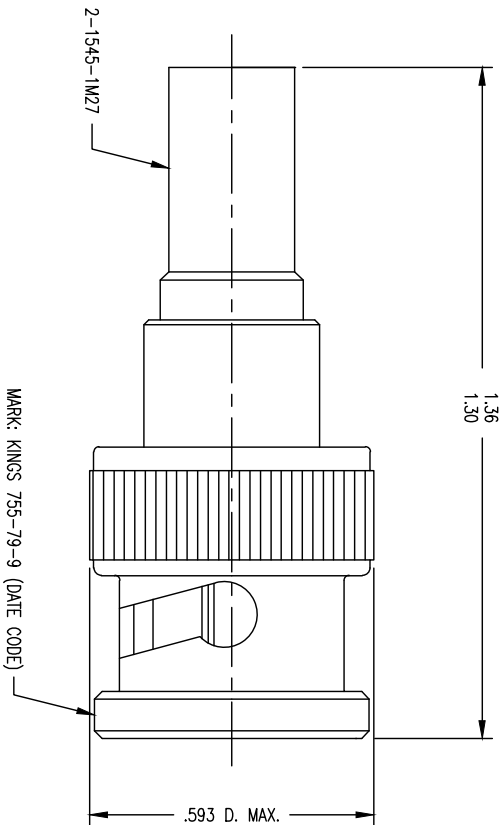

NOTES:

1. FOR USE WITH BOEING BMS13-65 OF & ADAMS RUSSELL FC11Z CABLES.
2. FOR CABLING INSTRUCTIONS SEE 3-546-1.
3. FOR CRIMPING USE DIE KTH-2214.
4. INTERFACE PER MIL-STD-348, FIG. 301-1.
5. CENTER CONTACT (1-2359-1MA9) SUPPLIED UNASSEMBLED.
6. MARK PACKAGE: KINGS 755-79-9 (DATE CODE)
7. MATERIALS:
INSULATOR: TEFLON, ASTM D1710
K-GRIP SLEEVE: COM. BRONZE TUBE, ASTM B135
CONTACT F-M }
SPRING WASHER } BER. COPPER, ASTM B196
GASKET: SILICONE RUBBER, A-A-59588
ALL OTHER METAL PARTS: BRASS, ASTM B16

8. FINISHES:

- CENTER CONTACT: .000050 MIN GOLD PLATE, PER ASTM B488 OVER
.000050 MIN. NICKEL PER AMS-QQ-N-290 (RoHS)
SPRING WASHER: .00020 MIN SILVER PLATE PER ASTM B700 OVER
.000020 MIN COPPER PER ASTM B734 (RoHS)
ALL OTHER METAL PARTS: .000050 MIN NICKEL PER AMS-QQ-N-290
OVER .000050 MIN COPPER PER ASTM B734 (RoHS)
9. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 500 VRMS
FREQUENCY RANGE: DC TO 11 GHz
10. WEIGHT: 11.9 GRAMS

755-79-9

REVISIONS															
ISSUE	CHANGES														
0	ER 33879 JCA 04/24/92														
B	REVISED PER DMF304 & ER35722 KPL 11/04/11	CUSTOMER SALES DRAWING THIS DRAWING, THE DESIGN AND IDEAS EMBODIED IN THE DEVICE TO WHICH IT RELATES, AND THE METHOD OF PRODUCING THE DEVICE, ARE THE PROPERTY OF WINCHESTER ELECTRONICS CORPORATION AND SHALL NOT BE EMPLOYED, COPIED, OR DISCLOSED TO ANYONE, IN ANY MANNER WITHOUT THE CONSENT OF WINCHESTER ELECTRONICS CORPORATION. SCALE 4:1 APPROX SURFACE AREA WAS: E-17425 CAGE CODE: 91836 REF: BOEING PLUG, BNC <table><tr><td>DRAWN</td><td>JCA</td><td>DATE</td><td>04/24/92</td></tr><tr><td>DESIGN</td><td>JT</td><td>DATE</td><td>04/27/92</td></tr><tr><td>APPR.</td><td></td><td>DATE</td><td></td></tr></table> WINCHESTER ELECTRONICS  Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492 755-79-9		DRAWN	JCA	DATE	04/24/92	DESIGN	JT	DATE	04/27/92	APPR.		DATE	
DRAWN	JCA			DATE	04/24/92										
DESIGN	JT			DATE	04/27/92										
APPR.				DATE											