



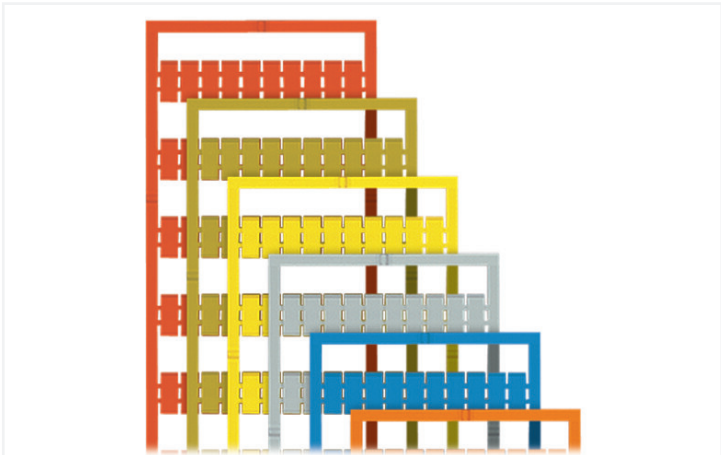

Color: ■ orange

Similar to illustration

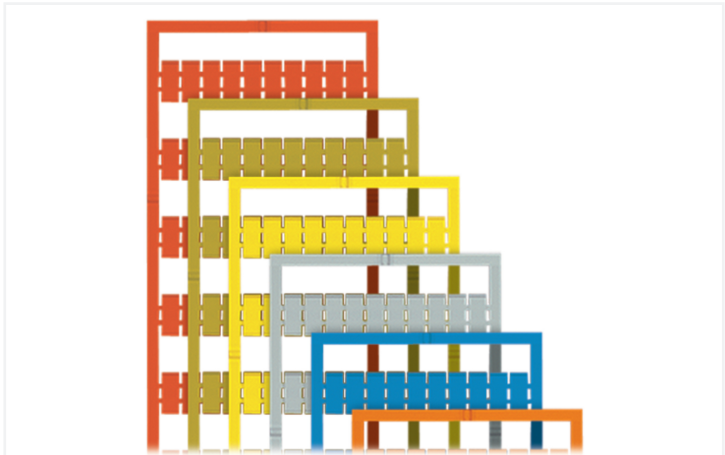

Similar to illustration

Custom Marking

These markers can also be conveniently customized using our WAGO Configurator Smart Designer. Simply click on the "Configure" button on the right, and label the markers as needed. Before ordering, you must register the configurator.

For re-orders, use the provided item number; this number can also be found in your software projects.

Have questions about the WAGO Configurator Smart Designer?
Please email them to smart.designer@wago.com.

Technical data	
Marking method	Plotting
Marking	plain
Delivery form	Marker card
Delivery form configuration	10 strips with 10 markers per card
Flammability class per UL94	V2

Physical data	
Marker/strip width	5 ... 5.2 mm
Marker width	5 mm

Mechanical data	
Smear resistance	EN 60998-1:2004

Material data	
Color	orange
UV resistance	EN 60068-2-5:2010 Procedure B
Halogen-free	Yes
Weight	8.8 g
Fire load	0.264 MJ



Commercial data		
PU (SPU)		50 (5) pcs
Packaging type		Box
Country of origin		DE
GTIN		4045454001988
Customs tariff number		39269097900

Product classification		
UNSPSC		39131505
eCl@ss 10.0		27-14-11-37
eCl@ss 9.0		27-14-11-37
ETIM 9.0		EC000761
ETIM 8.0		EC000761
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption

Downloads		
Environmental Product Compliance		
Compliance Search		
Environmental Product Compliance		
793-5501/000-012		

Documentation				
Bid Text				
793-5501/000-012	19.02.2019	xml	2.62 KB	
793-5501/000-012	04.01.2018	doc	23.50 KB	

CAD/CAE-Data		
CAD data		CAE data
2D/3D Models		EPLAN Data Portal
793-5501/000-012		793-5501/000-012
		ZUKEN Portal
		793-5501/000-012

Installation Notes

Application




Separating a strip from the WMB or WMB marker card.



Stretching a WMB marker strip.



Separating an individual marker from the WMB marker strip – for larger terminal blocks.



Snapping a marking strip into the marker slot.

Marking



Snapping a WMB marker strip into the marker slot of the double marker carrier.



Snapping a marking strip into the marker slot.