

REVISIONS	
A	NEW DWG C022575 R R R 2 JAN 68
B	C022575 G.F.S 8 AUG 68
C	CO 52433 WJM 14 DEC 82
D	CO 74330F T S M 23 NOV 93
E	CO - 75422 JWB DEC 93
F	CO- 94212-L DLM 9 FEB 00

ISSUE 12

REPLACES

RELEASE NO.

CHECK

68

26 JAN 68

CAN

7

CHECK

68

26 JAN 68

CAN

7

CHECK

68

26 JAN 68

CAN

7

CHECK

68

26 JAN 68

CAN

7

CHECK

68

26 JAN 68

CAN

7

CHECK

68

26 JAN 68

CAN

7

CHECK

68

26 JAN 68

CAN

7

CHECK

68

26 JAN 68

CAN

7

CHECK

68

26 JAN 68

CAN

7

CHECK

68

26 JAN 68

MICRO SWITCH
a Honeywell Division


FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-7RW204


M8805/I-055

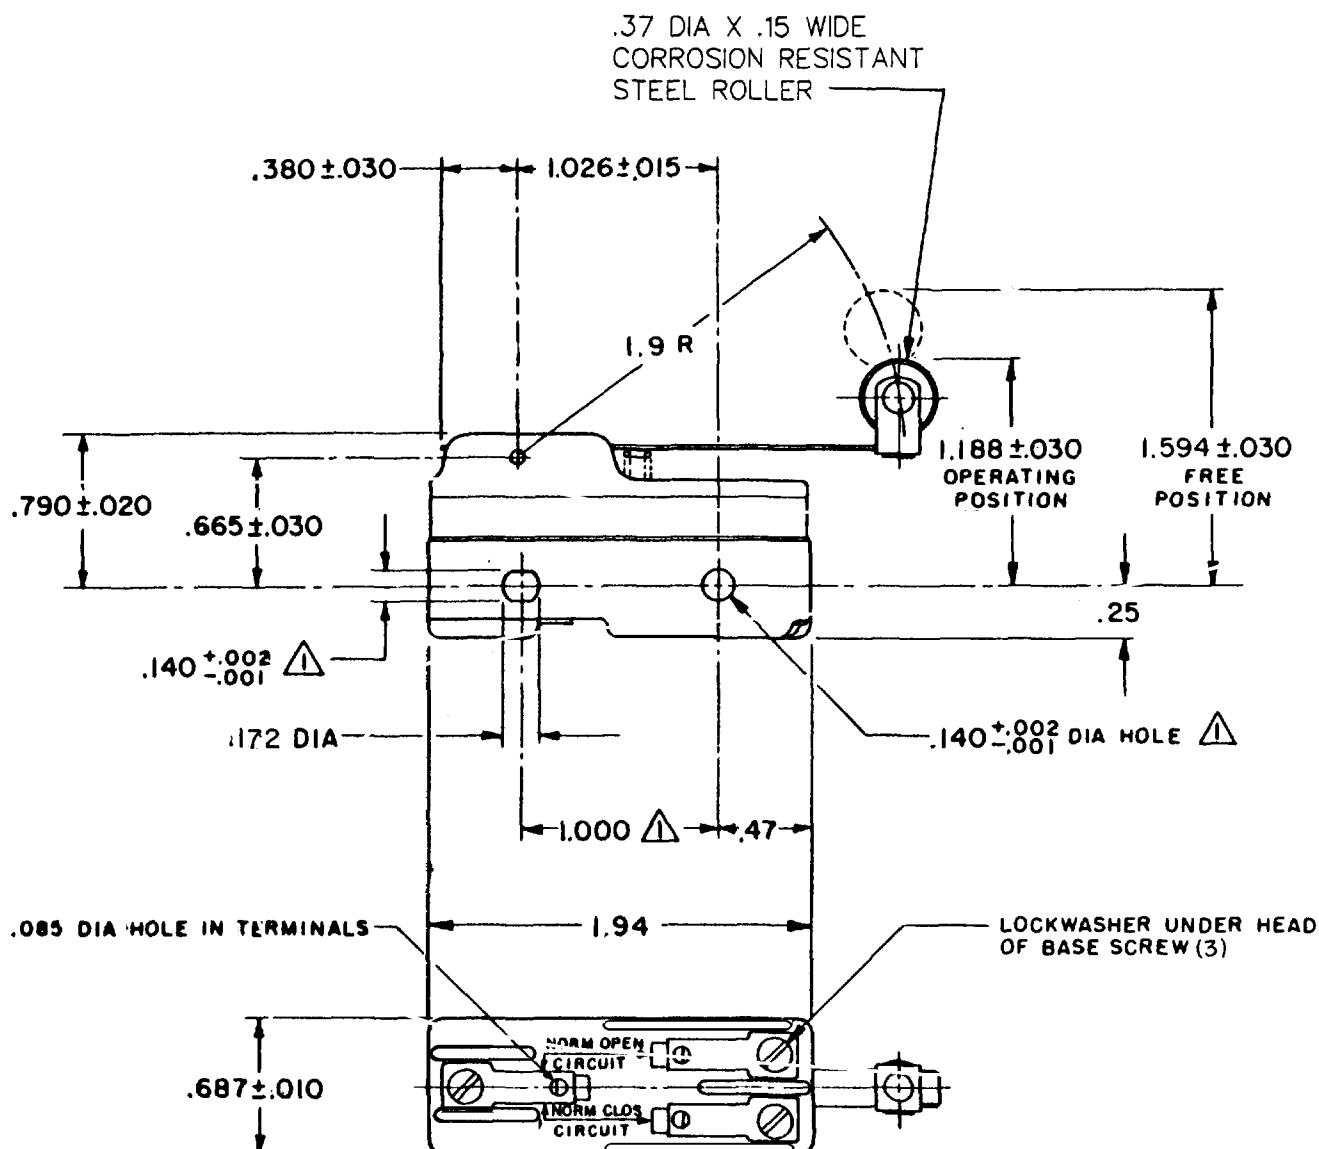

NOTE -
MOUNTING HOLES WILL ACCEPT PINS OR SCREWS
OF .139 MAX DIA ON 1.000 ± .002 CENTERS.

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS

OPERATING FORCE — — — — 1-4.5 OZ
RELEASE FORCE — — — — 0.75 OZ MIN
PRETRAVEL — — — — .469 MAX
DIFFERENTIAL TRAVEL — — .150 MAX
OVERTRAVEL — — — — .156 MIN

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

SCALE FULL

DO NOT
SCALE PRINT

UNLESS OTHERWISE SPECIFIED
TOLERANCES ARE
ONE PLACE (.0) ± .030
TWO PLACE (.00) ± .015
THREE PLACE (.000) ± .005
ANGLES ±

WEIGHT .063 LB