


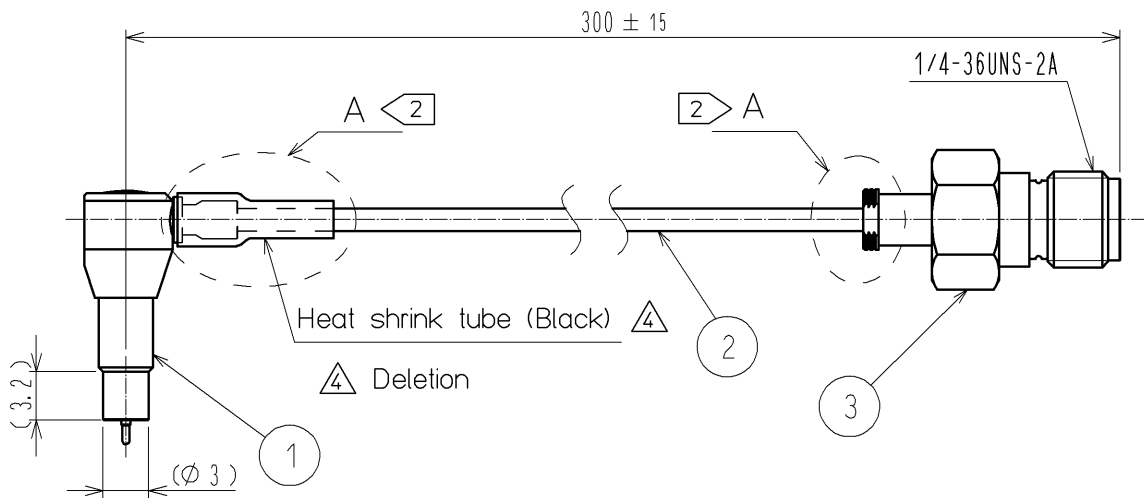

Note 1 Lead-Free Solder (Sn3.0Ag0.5Cu) is used.

2 Please do not overload the cable assembly portion of A when removing the connector.

4 Deletion

2	Coaxial Cable	DFS111-UL1979			
1	MS-156-088LP-H1		3	HRM-200-088JBN(40)	
NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
UNITS mm		SCALE Free	COUNT 4 3	DESCRIPTION OF REVISIONS DIS-J-001149	DESIGNED TA. SATO
					CHECKED TY. OZAKI
					DATE 10. 04. 22
HIROSE ELECTRIC CO., LTD.		APPROVED : KY. SHIMIZU	09. 05. 14	DRAWING NO. EDC4-180865-00	
		CHECKED : TY. OZAKI	09. 05. 13	PART NO. MS156LH1-HRMJ-088V300	
		DESIGNED : DS. YAMAKOSHI	09. 05. 13	CODE NO. CL362-0152-0-00	
		DRAWN : DS. YAMAKOSHI	09. 05. 13	1/1	