


TABLE 1																
DASH NO	CABLES ACCOMMODATED	A DIM	B DIM	C FLATS	D FLATS	E DIA	CABLE ENTRY DIA	ASSEMBLE PER	CABLE TYPE							
-7	TRC-50-2 TRC-75-2	1.165	.096	.438	.438	.500	.274	TAI-189	TRIAx							
-8	8227, BELDEN	1.740	.130	.625	.688	.750	.345	TAI-103	TWINAX							
-9	TWC-78-2 TWC-124-2	1.165	.096	.438	.438	.500	.285	TAI-102								
-A9 3	BL782, TIMES BL982, TIMES BL1242, TIMES															
-10	RG-22 754E, AT&T															
-11	760A, AT&T	1.740	.130	.625	.688	.750	.455	TAI-103								
-12	16PEVL, AT&T VI-AL, GENERAL						.347	TAI-128								
-13	TRF-59, TIMES						.485									
-13A	8232, BELDEN						.362			TAI-129						
-14	8233, BELDEN						.352			TAI-165						
-23	250-3884, MICRODOT	1.165	.096	.438	.438	.500	.490	TAI-129		TRIAx						
-24	202-3934, MICRODOT						.183	TAI-189	TWINAX							
-24A	9530A5117, RAYCHEM						.191	TAI-102								
-25	T-43M, GENERAL						.200	TAI-189	TRIAx							
-25A	5021H5331, RAYCHEM						.285	TAI-102	TWINAX							
-26	7028A5518, RAYCHEM						.191	TAI-189	TRIAx							
-27	1191PSJ2619EN, WOVEN 202-3927, MICRODOT 202-3942, MICRODOT						1.165	.096	.438	.438	.500	.145	TAI-102	TWINAX		
-29	TWC-78-1/TWC-124-1A											.191				
-30	761A, AT&T 8441, BELDEN											.235				
-32	TRC-50-1											.191				
-33	TRC-75-1	.217														
-42	21-204, ESSEX 4463, CONSOLIDATED	1.165	.096	.438	.438	.500	.300	TAI-189	TRIAx							
-43	250-4044/250-4045 293-3930, MICRODOT						.200									
-45	M27500-22TE2114 1100-66F, STANDARD						.183			TAI-102						
-46	9860, BELDEN						1.740			.130	.625	.688	.750	.475	TAI-103	TWINAX
-47	M177176-00002						1.165			.096	.438	.438	.500	.164	TAI-102	
-49	TWC-78-1F2	1.740	.130	.625	.688	.750	.132	TAI-103								
-54	89207, BELDEN	1.165	.096	.438	.438	.500	.323	TAI-103	TWINAX							
-55	89272, BELDEN						.250	TAI-102								
-56	GC875GCI, GRUMMAN						.191	TAI-189	TRIAx							
-57	GC875GB1, GRUMMAN						1.165	.096	.438	.438	.500	.198	TAI-102	QUADRAX		
-58	GC875TM24H, GRUMMAN															
-59	GC875LNI, GRUMMAN															
-60	M177177, THERMATICS 380-10045, BOEING											.217	TAI-189	TRIAx		
-64	7528A5314, RAYCHEM											.183				

DATA CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO EMERSON CONNECTIVITY SOLUTIONS AND SHALL NOT BE DISCLOSED, COPIED OR USED FOR PROCUREMENT OR MANUFACTURE WITHOUT EXPRESS WRITTEN PERMISSION

REVISIONS

REV	DESCRIPTIONS	DATE	APPROVED
AD	ECO 52460	6/18/10	CSM

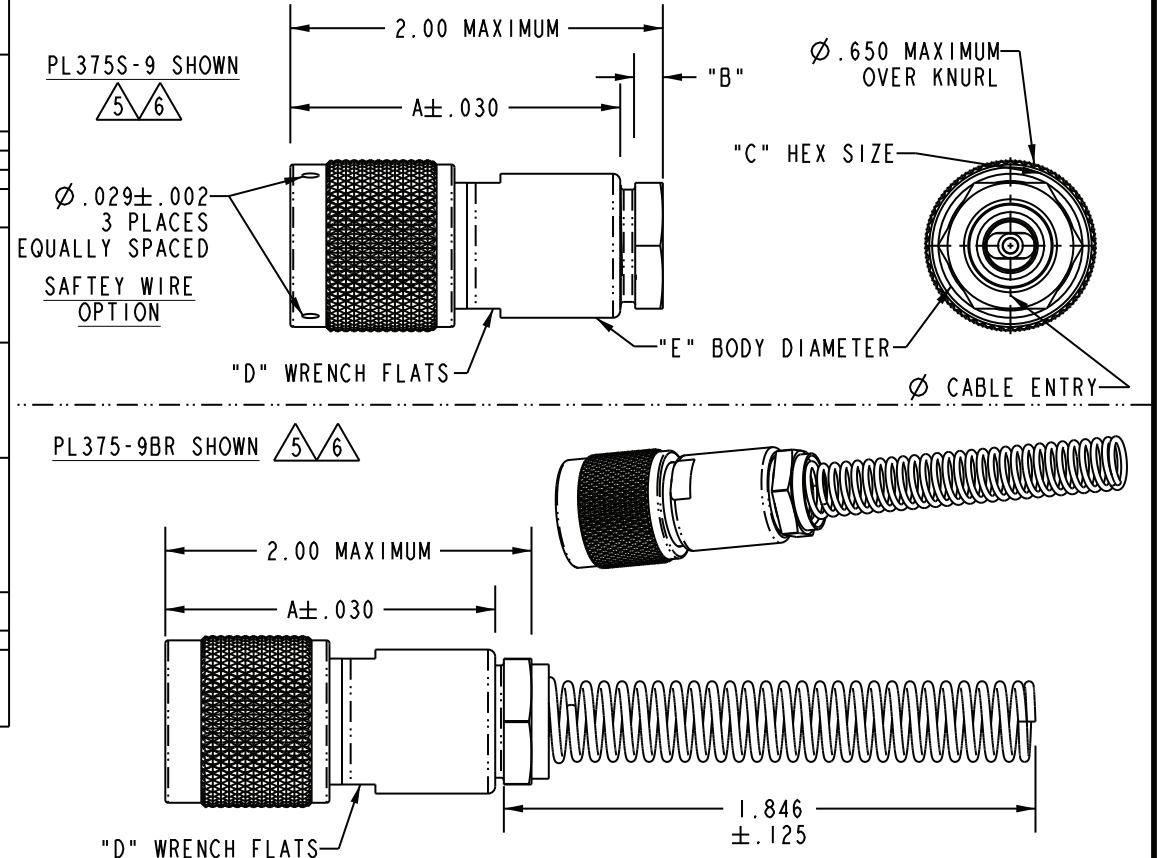

- 6 IF SAFETY WIRE TYPE & BEND RELIEF SPRING READ ADD SUFFIX "SBR" TO MODEL NO (NOT AVAILABLE WITH CABLE GROUPS -8, -10, -11, -12, -13, -13A, -14, -46, & -54)
- 5 IF BEND RELIEF SPRING READ (SEE FIG 2) ADD SUFFIX "BR" TO MODEL NO (NOT AVAILABLE WITH CABLE GROUPS -8, -10, -11, -12, -13, -13A, -14, -46, & -54)
- 4 IF SAFETY WIRE TYPE READ ADD SUFFIX "S" TO MODEL NO (PL375S)
- 3 CLAMP NUT OMITTED
- 2 CONCENTRIC TWINAX/TRIAX TRT CABLE PLUG
- 1 FINISH: TFS-1A (NICKEL)

7. EXAMPLE OF COMPLETE MODEL NO:
PL375 S -7 BR

BASIC MODEL NO

BEND RELIEF (OMIT IF NOT READ)

SAFETY WIRE TYPE (OMIT IF NOT READ)

DASH NO (CABLE GROUP, TABLE 1)

INTERPRET DRAWING PER MIL-STD-100. DIMENSIONS ARE IN INCHES AND INCLUDE FINISH THICKNESS UNLESS OTHERWISE SPECIFIED.		TOL: UNLESS SPECIFIED. XX ± .02 .XXX ± .010 .XXXX ± .0010 ANGLE ± 1° 00'  CRITICAL		 cinch CONNECTIVITY SOLUTIONS a bell group		Cinch Connectivity Solutions 299 Johnson Ave. Ste. 100 Waseca, MN 56093 1-800-247-8256									
DRW	BPK	7/29/11	MATERIAL:		TITLE: PL375 / PL375S PL375BR / PL375SBR										
CHK	CSM	8/1/11													
QUALITY			FINISH:		<table><tr><td>SIZE</td><td>CAGE CODE</td><td>DRAWING NO.</td><td>REV.</td></tr><tr><td>A</td><td>14949</td><td>315-0011</td><td>AD</td></tr></table>			SIZE	CAGE CODE	DRAWING NO.	REV.	A	14949	315-0011	AD
SIZE	CAGE CODE	DRAWING NO.	REV.												
A	14949	315-0011	AD												
MANUF															
APPROVED															
PROT FILE NO. 315-0011		DO NOT SCALE DWG		SCALE 1/1	DATE 5/23/73	SHEET 1 OF 2									