used for: DIN EN 60603 TYPE "C"

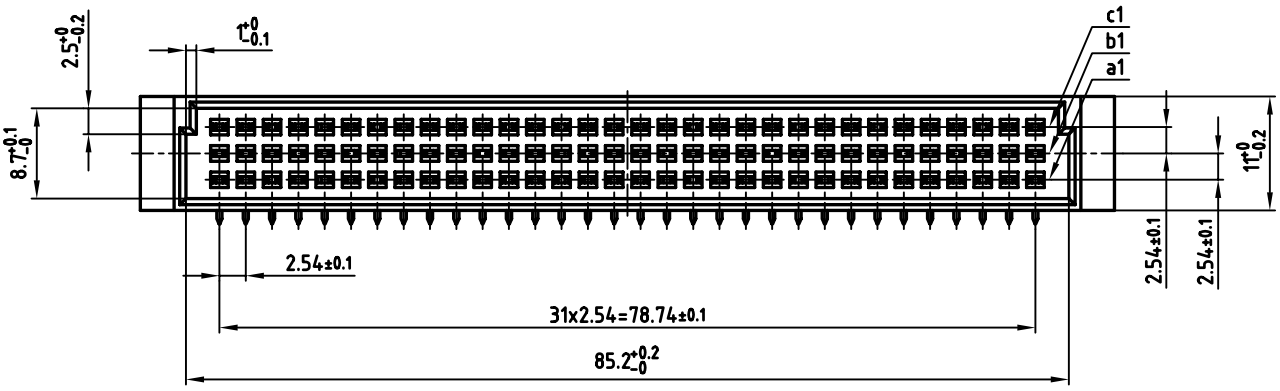

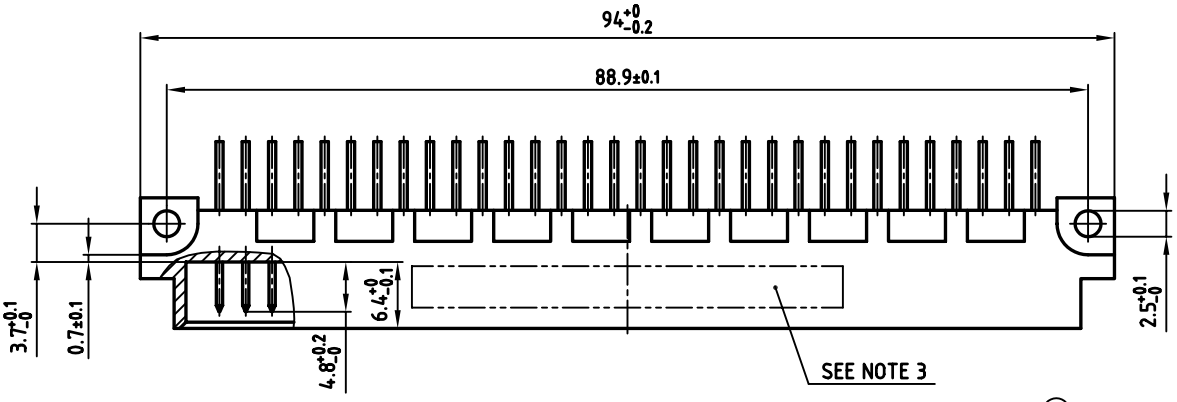

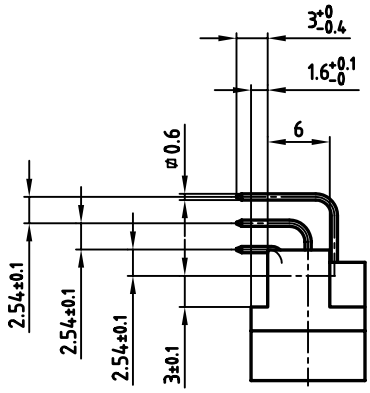

(b)

PLATING	PART-NO.
7µ" HARD GOLD OVER min. 50µ" NICKEL	121A10149X
23µ" HARD GOLD OVER min. 50µ" NICKEL	121B10149X
47µ" HARD GOLD OVER min. 50µ" NICKEL	121C10149X

NOTES:

1. INSULATORS: PBT GF UL 94 V-0, GREY
(b) 2. CONTACTS: COPPER ALLOY
PLATING: SEE TABLE
3. CONNECTOR IS PART MARKED: PART-NO. CONEC Y/WW

PCB - HOLE PATTERN

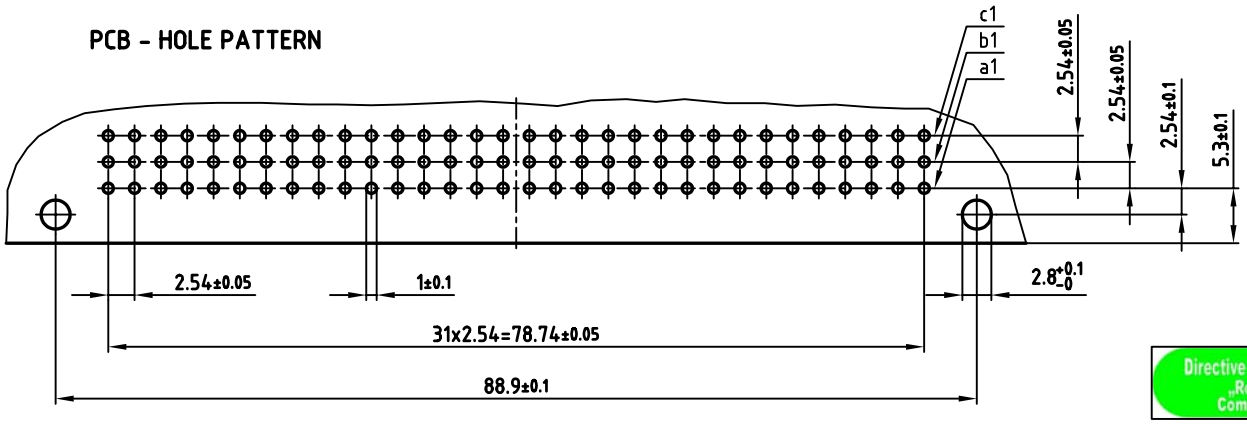

Directive 2002/95/EC „RoHS" Compliant

APPROVAL # FREIGABE # DEBLOCAGE # AUTOR/ZACION # APPROVAL

CUSTOMER APPROVAL DATE:

NAME: TITLE:

COMPANY NAME:

THIS DRAWING MAY NOT BE COPIED OR REPRODUCED IN ANY WAY, AND MAY NOT BE PASSED ON TO A THIRD PARTY WITHOUT WRITTEN PERMISSION. OWNERSHIP AND COPYRIGHT OF CONEC GmbH

DO NOT ALTER CAD DRAWING BY HAND

rev.	description	date	name
2 x b	Ä 1743	04.03.2003	Parei

tolerance

dim. in mm

	date	name
2003		
drawn	27.02.	Schmidt
appd.	27.02.	Kühle
norm	DIN EN 60603	
d-old		

CONEC®

scale: 2:1

material: SEE NOTES

title:

MALE CONNECTOR TYPE "C"

96pos. angled

dwg no: 12K1A239

AutoCAD 2000 | DIN-A 3 | sh: 1/1

part no: SEE TABLE

Downloaded from Arrow.com.