


THIS DRAWING CONTAINS INFORMATION PROPRIETARY TO POSITRONIC AND IT'S SUBSIDIARIES. POSITRONIC BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE, SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

SK10772

DATE	REV	REVISION RECORD	APP	DR	CK
5-15 09	NC	ECO 31067	RCW	BS	TK

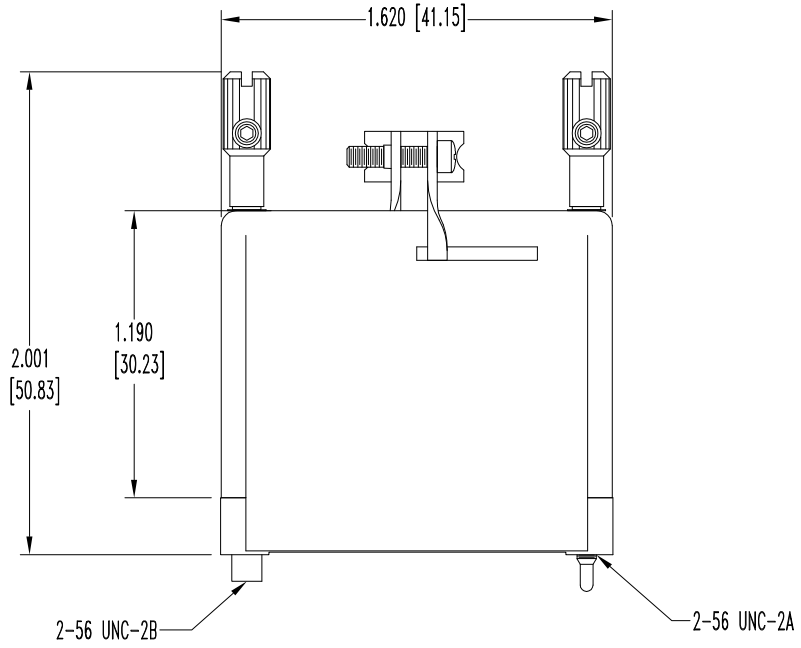

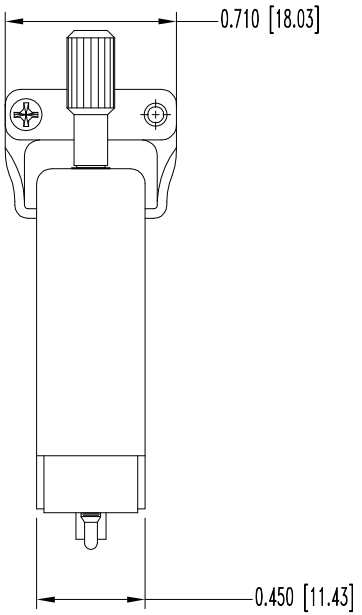

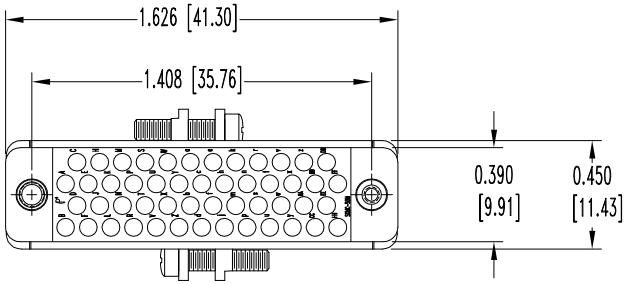

NOTES:

1. MATERIALS AND FINISHES:
   - INSULATOR: GLASS FILLED DAP PER ASTM-D-5948, SDG-F, COLOR: GREEN.
   - HOODS AND CABLE ADAPTORS: ALUMINUM WITH YELLOW ANODIZE.
   - JACKSCREW SYSTEMS: STAINLESS STEEL, PASSIVATED.
   - SCREWS: BRASS, ZINC PLATE WITH CHROMATE SEAL.
2. ELECTRICAL CHARACTERISTICS:
   - INSULATOR RESISTANCE: 5 OHMS
   - WORKING VOLTAGE: 250 V.AC r.m.s.
3. WORKING TEMPERATURE: -55°C TO +135°C
4. DIMENSIONS ARE IN INCHES [MILLIMETERS].

POSITRONIC INDUSTRIES INC.
www.connectpositronic.com
FSCM 28198

DECIMAL TOL. ±0.015 [0.38]	SGMC SERIES	SCALE N.T.S.	DRAWN BY B SHELLEDY APPROVED BY R WILLIAMS
	TITLE SGMC50M0E100J0		
ANGULAR TOL. ±5°	DATE 5-15-09	DRAWING NUMBER SK10772	REV. NC

Downloaded from Arrow.com.