

F1471EVB-2P6

● Active

📦 Samples Available

Evaluation Board for F1471 RF Amplifier - 2300MHz to 2900MHz Frequency Band


Order Now

- Overview
- Product Options
- Support
- Videos & Training

Overview

- Description
- Features
- Related Products

The F1471EVB-2P6 is a fully populated evaluation board specifically designed to evaluate the frequency band of 2300MHz to 2900MHz for the F1471 High Gain RF Amplifier.

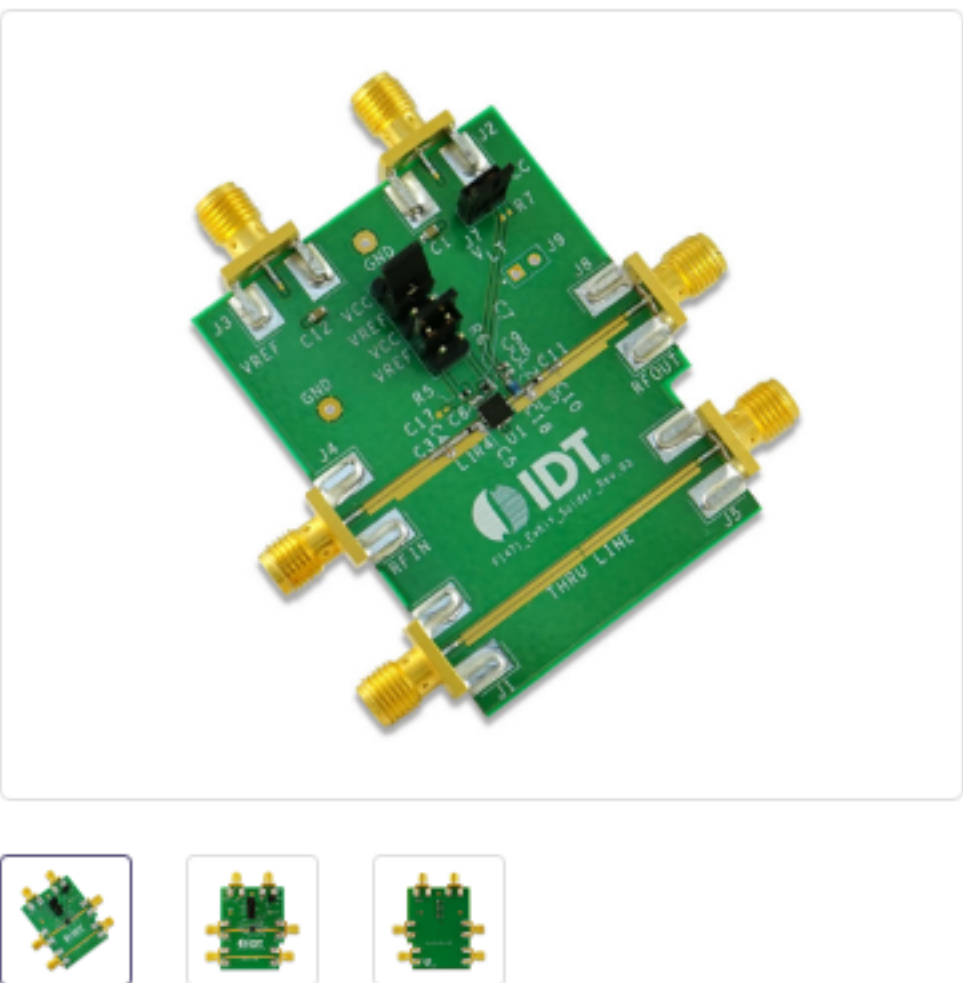

Product Options

Please log in or register to buy

Log in to order

Show Filters

⌂ Reset

🖥 Full Screen

📄 Export

🔍 Tips

Filter Parts	Description	Buy / Sample
F1471EVB-2P6 ● ✓ 📦 🛒	Tuned to frequency band of 2300MHz to 2900MHz	Get Samples, Buy / Quote

Support

- Contact Technical Support
- Get Samples
- Contact a Sales Representative

Videos & Training

IDT RF Product Benefits Overview

▼ Read More

Zero-Distortion RF Technology by IDT

Flat Noise RF Technology by IDT

Glitch-Free RF Technology by IDT

Constant Impedance Kz RF Technology by IDT

Constant Linearity (KLIN) RF

Stay Informed

Get the latest news, products, and solutions delivered straight to your inbox.

Sign Up Now

Corporate

- Overview
- Careers
- Investors
- News
- Sustainability
- Contact
- Blogs
- Videos

Top Tools

- e² studio
- CS+
- Renesas Flash Programmer
- MCU / MPU Selection Tool
- iSim:PE Offline Simulation Tool
- PowerCompass Multi-Rail Design Tool
- PowerNavigator
- Lab on the Cloud
- QuickConnect Platform

Buy/Sample

- Technical Support
- Free Sample Request
- Check Product Availability
- Sales and Distributor Directory

Language

- English
- 中文
- 日本語