


COAXIAL SURGE PROTECTOR DEVICE, Quarter-wave stub
technology
3400.17.0426

Properties

- Maintenance-free products
- Highest current handling capability up to 100 kA max.
- Best PIM performance
- Available in several frequency ranges from 380MHz up until 18GHz
- Inertion loss not exceeding 0.2 dB max.
- Compliant to IEC 61643-21

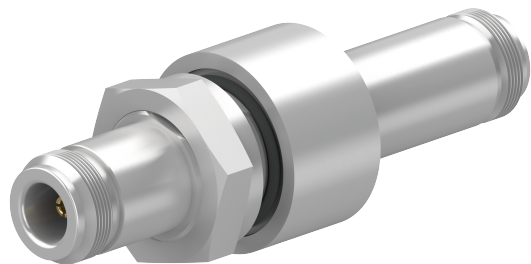

Product configuration	
Main path connectors	Port 1: unprotected, N jack (female) Port 2: protected, N jack (female)
Mounting and grounding	MH170 (bulkhead mounting), brk (bracket)
Side of bulkhead	protected side
Inline design	YES
EMP can be install reversed	YES
Interface and material data	
Housing material / plating	Aluminium Port 1: Copper Beryllium Alloy / Gold Plating (without Nickel underplating)
Center contact, material / plating	Port 2: Copper Beryllium Alloy / Gold Plating (without Nickel underplating)
Electrical data	
Impedance	50 Ω
Frequency frame	2000 MHz to 6000 MHz
Return loss typical	≥ 20 dB
Insertion loss typical	≤ 0.2 dB
CW power frame	≤ 300 W
Residual pulse energy (typ.)	0.2 μJ LEMP (test pulse 4 kV 1.2/50 μs; 2 kA 8/20 μs) 250 μJ (test pulse 55 kA 8/20 μs)
Residual pulse voltage (typ.)	1.5 V LEMP (test pulse 4 kV 1.2/50 μs; 2 kA 8/20 μs) 30 V (test pulse 55 kA 8/20 μs)
Surge current handling capability	50 kA multiple (test pulse 8/20 μs)

COAXIAL SURGE PROTECTOR DEVICE, Quarter-wave stub technology

3400.17.0426

Electrical remarks			
Gas tube		No DC / shorted QW or LC	
Mechanical data			
Weight		93 g	
Mating cycles		100	
Environmental data			
Operation temperature		-40 °C ... 85 °C	
Storage temperature		-40 °C ... 85 °C	
Ingress protection (IP Rating)		Mated / IP68, according to IEC 60529	
Thermal shock according		MIL-STD-202, Method 107, Cond. B	
Vibration according		MIL-STD-202, Method 204, Cond. A	
Moisture resistance according		MIL-STD-202, Method 106	
Compliance			
Item number	Directive / Regulation	Rating	Exemptions / Details
84040116	RoHS 2011/65/EU and (EU) 2015/863	Compliant with exemption	6c
	REACH 1907/2006 Article 33 SVHC	Contains one or more SVHC >0,1%	CAS: 7439-92-1 Lead
Comment			
		Ordering information for optional mounting/grounding accessories: -Grounding ring 9075.99.0027, terminal lug for cable 6AWG/16 mm^2 (diameter 6 mm), material: copper, tin plated	
Ordering Information Table			
Item number		Item description	
84040116		3400.17.0426	

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P2061 / Date of publication: 28.02.2025 / uncontrolled copy