


CUSTOMER DRAWING

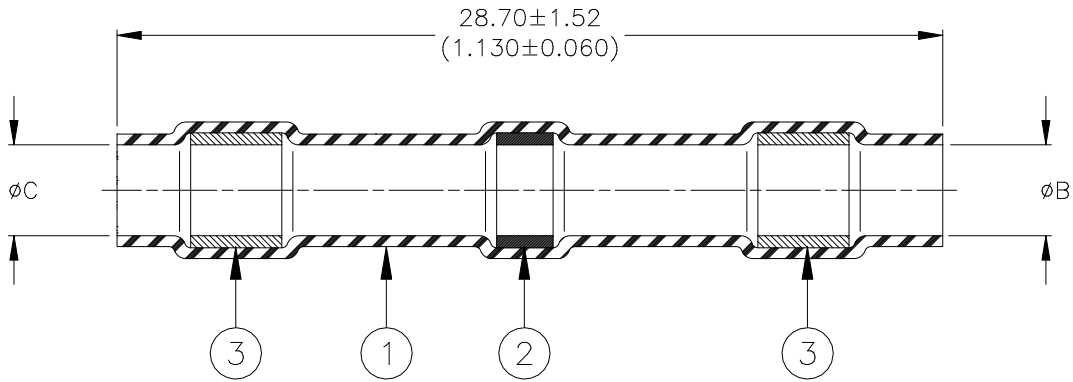

Product Names	NAS Equivalent	Product Dimensions		Typical Wire Bundle Size	
		ØB min	ØC min	ØD max	ØE min
D-144-15	1744-1	1.91 (0.075)	2.41 (0.095)	2.41 (0.095)	0.89 (0.035)
D-144-12	1744-2	2.54 (0.100)	3.18 (0.125)	3.18 (0.125)	1.39 (0.055)
D-144-13	1744-3	4.57 (0.180)	5.08 (0.200)	5.08 (0.200)	2.54 (0.100)
D-144-14	1744-4	7.11 (0.280)	7.62 (0.300)	7.62 (0.300)	4.06 (0.160)


MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked polyvinylidene fluoride.
- SOLDER PREFORM WITH FLUX:
 - SOLDER: TYPE Sn63 per ANSI/J-STD-006.
 - FLUX: TYPE ROL1 per ANSI/J-STD-004.
- SEALING RINGS: Immersion resistant thermoplastic. Color: gray.


APPLICATION

- These parts are designed to provide an immersion resistant shield termination on cables, rated for 125°C minimum, meeting the dimensional criteria listed and having tin or silver plated shields.
- These parts are designed to meet the requirements of Raychem Specification RT-1404. They also comply with National Aerospace Standard Part Drawing NAS-1744. See table for equivalent sizes.
- Temperature range: -55°C to +150°C.
- Install using TE Connectivity-approved convection or infrared heating tools in accordance with Raychem Process Standard RCPS-100-70.

For best results, prepare the cable as shown:

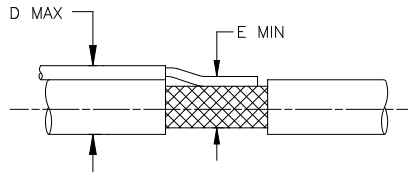

TE Connectivity, TE connectivity (logo), Raychem, and SolderSleeve are trademarks

		Raychem		TITLE: SOLDERSLEEVE, HIGH TEMPERATURE IMMERSION RESISTANT	
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]				DOCUMENT NO.: D-144-12/-15	
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	TE Connectivity reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		Revision: 3	Issue Date : March 2020
DRAWN BY: M. FORONDA	CAGE CODE: 06090	DATE: 1-Sep-04	ECO: ECO-20-004474	SCALE: None	SIZE: A SHEET: 1 of 1

Print Date: 1-Apr-20

© 2020 Tyco Electronics Corporation. All rights reserved.

If this document is printed it becomes uncontrolled. Check for the latest revision.