

# MICRO SWITCH

FREERPORT ILLINOIS U S A  
A DIVISION OF HONEYWELL  
FED. MFG. CODE 91929

# SWITCH-BASIC

CATALOG LISTING

## BZ-2R55513-A2

BZ-2R55513-A2

PAGE 1 OF 1

M

DRAWING NUMBER

6

ISSUE

REPLACES

PR-13130

CHECK

REVISIONS

A	0067209	J A P	3 MAY 90
B	CO-73287-J	J A L	22 NOV 93
C	CO-775-3	J A	30 MAR 94
D	CO 81278	D L T	17 JUL 95
E	CO93346	D L T	4 SEP 98

CHECK

23 JUN 84

84

22 JUN


84

22 JUN

84

22 JUN

84

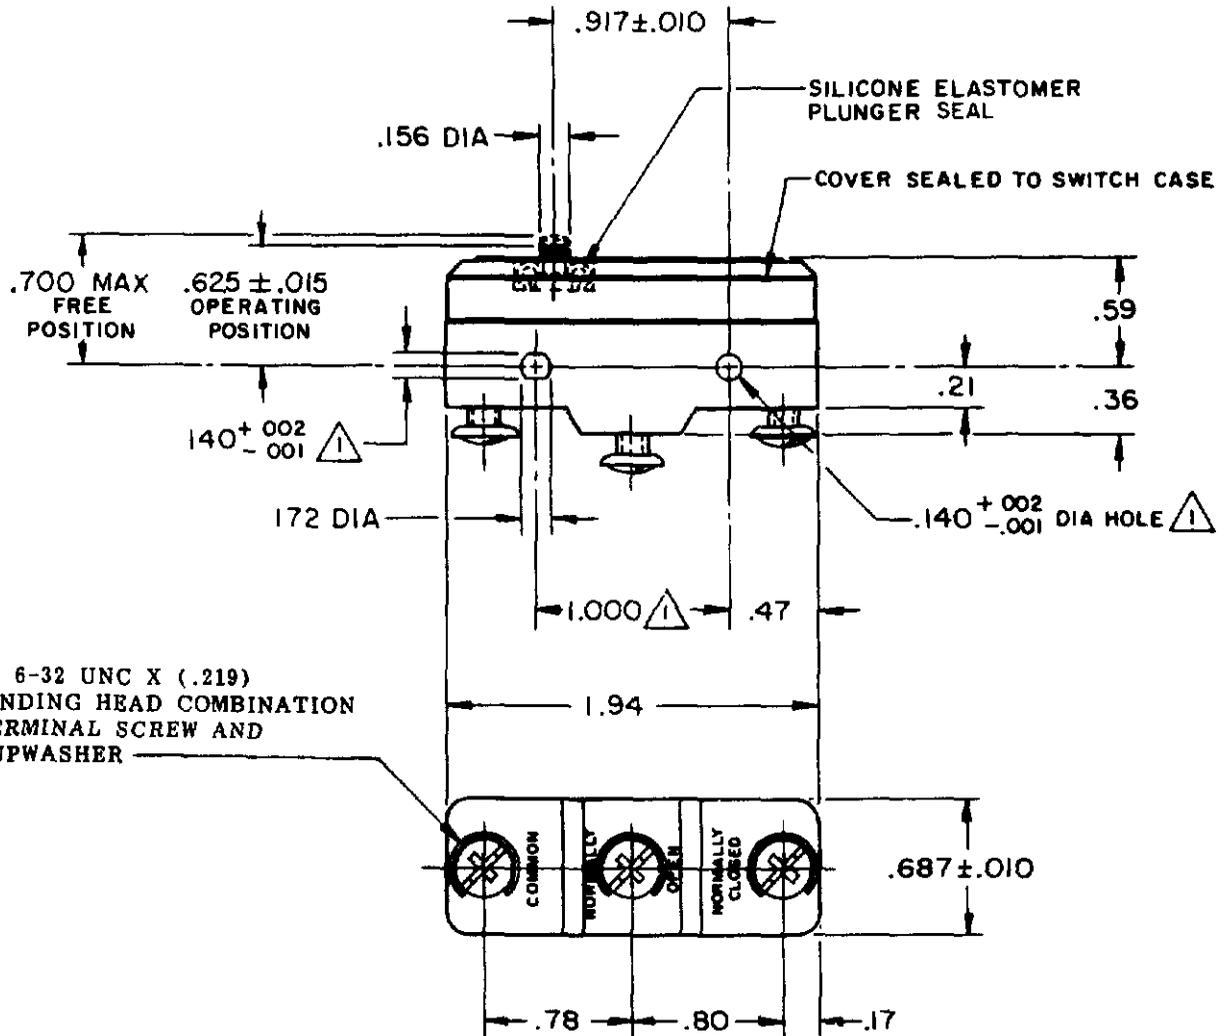


3X 6-32 UNC X (.219)  
BINDING HEAD COMBINATION  
TERMINAL SCREW AND  
CUPWASHER

- NOTES**
- 1 MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
  - 2 - SEALED CONSTRUCTION PROVIDES SPLASH RESISTANCE

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH.

THIRD ANGLE PROJECTION



CHARACTERISTICS
OPERATING FORCE ----- 8 - 15 OZ
RELEASE FORCE ----- 4 OZ MIN
DIFFERENTIAL TRAVEL --- .0004 - .0025
OVERTRAVEL ----- .005 MIN

ELECTRICAL DATA
CONTACT ARRANGEMENT S P D T
L96 15A 125, 250 OR 480 VAC 1/8 HP 125 VAC, 1/4 HP 250 VAC 1/2A 125 VDC, 1/4A 250 VDC
L288 L299 L306
CE D UL
16A 250V ~ T85 5E4

SCALE	FULL																									
DO NOT SCALE PRINT																										
TOLERANCES																										
APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE UNLESS NOTED. TOLERANCES ARE ±																										
DESIGN UNITS	<table border="1"> <thead> <tr> <th>NO PLACES</th> <th>DESIGN</th> <th>TOL.</th> <th>DESIGN</th> <th>TOL.</th> </tr> <tr> <th>ONE PLACE</th> <th>mm</th> <th>mm/in</th> <th>in</th> <th>mm/in</th> </tr> </thead> <tbody> <tr> <td>X</td> <td>1/64</td> <td>X X</td> <td>0.0150</td> <td>X X</td> </tr> <tr> <td>X X</td> <td>0.0010</td> <td>X X</td> <td>0.0005</td> <td>X X</td> </tr> <tr> <td>X X X</td> <td>0.0005</td> <td>X X X</td> <td>0.0002</td> <td>X X X</td> </tr> </tbody> </table>	NO PLACES	DESIGN	TOL.	DESIGN	TOL.	ONE PLACE	mm	mm/in	in	mm/in	X	1/64	X X	0.0150	X X	X X	0.0010	X X	0.0005	X X	X X X	0.0005	X X X	0.0002	X X X
NO PLACES	DESIGN	TOL.	DESIGN	TOL.																						
ONE PLACE	mm	mm/in	in	mm/in																						
X	1/64	X X	0.0150	X X																						
X X	0.0010	X X	0.0005	X X																						
X X X	0.0005	X X X	0.0002	X X X																						
<input type="checkbox"/> METRIC <input checked="" type="checkbox"/> US CUSTOMARY	WEIGHT .066 LB																									

FORMTEK

FO-52848-A

DRAWN

J A P 22 JUN 84