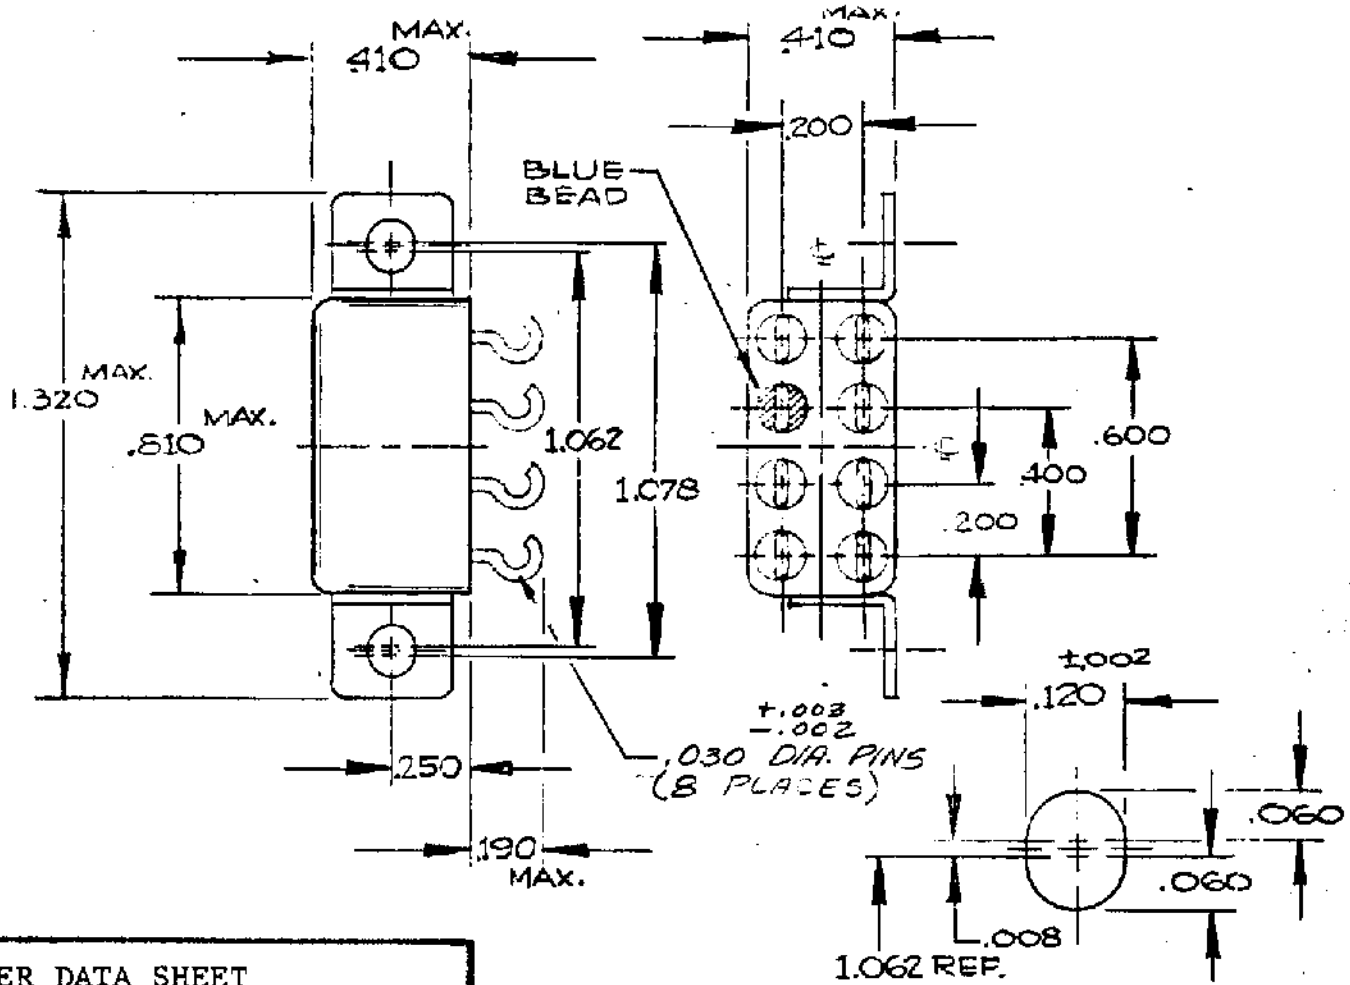


CUSTOMER DATA SHEET

COIL: @ +25° C

RESISTANCE 700Ω ± 10%

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 1.5 VDC

TOLERANCE UNLESS OTHERWISE SPECIFIED
DECIMALS ± .005 FRACTIONAL ± 1/64




ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS AT 30 g's

SHOCK 100 g's 6 ± 1 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

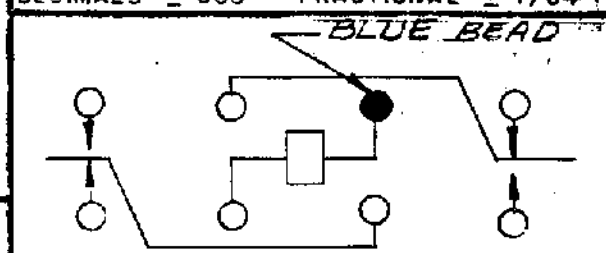CONTACT RATING: LOW LEVEL TO 2 AMP @ 28 VDC RESISTIVE
100,000 OPERATIONS

NOTES:

DR 2-2-84 CK. OSW

Communications Instruments, Inc.

CUST. QPL
CUST. NO. M39016/6-207L

TYPE HFW RELAY

HFW 1131 K05

SUPERSEDED
NOT the LATEST REVISION

Downloaded from Arrow.com.